



2019 NATIONAL REPAIR & REMODELING ESTIMATOR

by Albert S. Paxton

SAMPLE

Download all of Craftsman's most popular costbooks for one low price with the Craftsman Site License. <http://www.CraftsmanSiteLicense.com>



- Turn your estimate into a bid.
- Turn your bid into a contract.
- ConstructionContractWriter.com



Craftsman Book Company
6058 Corte del Cedro, Carlsbad, CA 92011

Preface

The author has corresponded with manufacturers and wholesalers of building material supplies and surveyed retail pricing services. From these sources, he has developed Average Material Unit Costs which should apply in most parts of the country.

Wherever possible, the author has listed Average Labor Unit Costs which are derived from the Average Manhours per Unit, the Crew Size, and the Wage Rates used in this book. Please read How to Use This Book for a more in-depth explanation of the arithmetic.

If you prefer, you can develop your own local labor unit costs. You can do this by simply multiplying the Average Manhours per Unit by your local crew wage rates per hour. Using your actual local labor wage rates for the trades will make your estimate more accurate.

What is a realistic labor unit cost to one reader may well be low or high to another reader, because of variations in labor efficiency. The Average Manhours per Unit figures were developed by time studies at job sites around the country. To determine the daily production rate for the crew, divide the total crew manhours per day by the Average Manhours per Unit.

The subject topics in this book are arranged in alphabetical order, A to Z. To help you find specific construction items, there is a complete alphabetical index at the end of the book, and a main subject index at the beginning of the book.

This manual shows crew, manhours, material, labor and equipment cost estimates based on Large or Small Volume work, then a total cost and a total including overhead and profit. No single price fits all repair and remodeling jobs. Generally, work done on smaller jobs costs more per unit installed and work on larger jobs costs less. The estimates in this book reflect that simple fact. The two estimates you find for each work item show the author's opinion of the likely range of costs for most contractors and for most jobs. So, which cost do you use, High Volume or Low Volume?

The only right price is the one that gets the job and earns a reasonable profit. Finding that price always requires estimating judgment. Use Small Volume cost estimates when some or most of the following conditions are likely:

- The crews won't work more than a few days on site.
- Better quality work is required.
- Productivity will probably be below average.
- Volume discounts on materials aren't available.
- Bidding is less competitive.
- Your overhead is higher than most contractors.

When few or none of those conditions apply, use Large Volume cost estimates.

Credits and Acknowledgments

This book has over 12,000 cost estimates for 2019. To develop these estimates, the author and editors relied on information supplied by hundreds of construction cost authorities. We offer our sincere thanks to the contractors, engineers, design professionals, construction estimators,

American Standard Products
DAP Products
Outwater Plastic Industries
Con-Rock Concrete
Georgia Pacific Products

material suppliers and manufacturers who, in the spirit of cooperation, have assisted in the preparation of this 39th edition of the National Repair & Remodeling Estimator. Our appreciation is extended to those listed below.

Kohler Products
Wood Mode Cabinets
Transit Mixed Concrete
U.S. Gypsum Products
Henry Roofing Products

Special thanks to: Dal-Tile Corporation 1713 Stewart, Santa Monica, California

About the Author

Albert Paxton is a Project Director at *Unified Building Sciences, Inc. (UBS)* (www.UnifiedGroup.com), located in Dallas, Texas.

Mr. Paxton (ALP@UnifiedGroup.com) is a California licensed General Contractor (B1-425946) and a Certified Professional Estimator with the *American Society of Professional Estimators*. The UBS staff is comprised of estimators, engineers and project managers who are also expert witnesses, building appraisers and arbitrators operating throughout the United States.

UBS clients include property insurance carriers, financial institutions, self-insureds, and private individuals.

The expertise of UBS is in both new and repair/remodel work, for both residential and commercial construction. In addition to daily claims involving individual structures, UBS assignments have included natural disasters such as the 1994 Northridge earthquake in California, the 2004 Hurricanes Charley, Frances, Ivan and Jeanne, striking Florida and the southeastern states, the catastrophic Hurricane Katrina (2005), the Texas Hurricanes Dolly (2008) and Ike (2008), the cleanup, repair and rebuilding of the massive destruction of Superstorms Sandy (2012), and, more recently, Hurricanes Matthew (2016), Harvey (2017), Irma (2017) and Michael (2018).

Main Subject Index

Abbreviations	20	Insulation	268
Acoustical treatment	21	Batt or roll / Loose fill / Rigid	
Adhesives	24	Lighting fixtures	278
Air conditioning and ventilating systems ...	28	Indoor / Outdoor	
Bath accessories	38	Mantels, fireplace	281
Bathtubs (includes whirlpool)	44	Marlite paneling	281
Cabinets	60	Masonry	282
Kitchen / Vanity		Brick / Concrete block / Glass block	
Canopies	75	Glazed tile / Quarry tile / Veneer	
Carpet	78	Medicine cabinets	41
Caulking	80	Molding and trim	298
Ceramic tile	83	Pine / Oak / Redwood / Resin	
Countertop / Floors / Walls		Painting and cleaning	326
Closet door systems	86	Interior / Exterior	
Bi-folding / Mirror / Sliding		Paneling	340
Columns	94	Plaster and stucco	344
Concrete, cast-in-place	96	Range hoods	348
Footings / Forms / Foundations / Reinforcing		Resilient flooring	350
Countertops	106	Linoleum / Tile / Vinyl	
Ceramic tile / Concrete / Engineered stone /		Roofing	356
Formica / Granite / Quartz / Wood		Aluminum / Built-up / Clay tile / Composition	
Cupolas	112	Mineral surface / Wood shakes or shingles	
Demolition	114	Sheet metal	372
Concrete / Masonry / Rough carpentry		Flashing / Gravel stop / Roof edging / Vents	
Dishwashers	130	Shower and tub doors	376
Door frames	132	Shower bases or receptors	381
Door hardware	134	Shower stalls	383
Doors	136	Shower tub units	386
Exterior / Interior		Shutters	387
Drywall	153	Siding	390
Electrical	155	Aluminum / Hardboard / Vinyl / Wood	
Entrances	160	Sinks	402
Excavation	160	Bathroom / Kitchen / Utility	
Fences	162	Skylights	425
Board / Chain link / Gates / Split rail		Spas	431
Fiberglass panels	168	Stairs	434
Fireplaces	170	Stair parts / Shop fabricated stairs	
Food centers	172	Suspended ceilings	438
Framing (rough carpentry)	173	Toilets, bidets, urinals	442
Beams / Joists / Rafters / Trusses		Trash compactors	448
Garage door operators	224	Ventilation	449
Garage doors	221	Flue piping / Chimney vent	
Garbage disposers	225	Wallpaper	452
Glass and glazing	227	Water filters	453
Glu-lam products	230	Water heaters	454
Beams / Purlins / Sub-purlins / Ledgers		Electric / Gas / Solar	
Gutters and downspouts	255	Water softeners	462
Hardwood flooring	258	Windows	463
Block / Parquetry / Strip		Aluminum / Horizontal slide / Wood / Garden	
Heating	261	Index	499
Boilers / Forced air / Space heaters			

How to Use This Book

1	2	3	4	5	6	7	8	9	10	11	12
Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P

The descriptions and cost data in this book are arranged in a series of columns, which are described below. The cost data is divided into two categories: Costs Based On Large Volume and Costs Based On Small Volume. These two categories provide the estimator with a pricing range for each construction topic.

The Description column (1) contains the pertinent, specific information necessary to make the pricing information relevant and accurate.

The Operation column (2) contains a description of the construction repair or remodeling operation being performed. Generally the operations are Demolition, Install, and Reset.

The Unit column (3) contains the unit of measurement or quantity which applies to the item described.

The Volume column (4) breaks jobs into Large and Small categories. Based on the information given regarding volume (on page 2), select your job size.

The Crew Size column (5) contains a description of the trade that usually installs or labors on the specified item. It includes information on the labor trade that installs the material and the typical crew size. Letters and numbers are used in the abbreviations in the crew size column. Full descriptions of these abbreviations are in the Crew Compositions and Wage Rates table, beginning on page 15.

The Manhours per Unit column (6) is for the listed operation and listed crew.

The units per day in this book don't take into consideration unusually large or small quantities. But items such as travel, accessibility to work, experience of workers, and protection of undamaged property, which can favorably or adversely affect productivity, have been considered in developing Average Manhours per Unit. For further information about labor, see "Notes — Labor" in the Notes Section of some specific items.

Crew Output per Day (7) is based on how many units, on average, a crew can install or demo in one 8-hour day.

Crew Output per Day and Average Material Unit (8) Cost should assist the estimator in:

1. Checking prices quoted by others.
2. Developing local prices.

The Average Material Unit Cost column contains an average material cost for products (including, in many cases, the by-products used in installing the products) for both large and small volume. It doesn't include an allowance for sales tax, delivery charges, overhead and profit. Percentages for waste, shrinkage, or coverage have been taken into consideration unless indicated. For other information, see "Dimensions" or "Installation" in the Notes Section.

If the item described has many or very unusual by-products which are essential to determining the Average Material Unit Cost, the author has provided examples of material pricing. These examples are placed throughout the book in the Notes Section.

You should verify labor rates and material prices locally. Though the prices in this book are average material prices, prices vary from locality to locality. A local hourly wage rate should normally include taxes, benefits, and insurance. Some contractors may also include overhead and profit in the hourly rate.

The Average Labor Unit Cost column (9) contains an average labor cost based on the Average Manhours per Unit and the Crew Compositions and Wage Rates table. The average labor unit cost equals the Average Manhours per Unit multiplied by the Average Crew Rate per hour. The rates include fringe benefits, taxes, and insurance. Examples that show how to determine the average labor unit cost are provided in the Notes Section.

The Average Equipment Unit Cost column (10) contains an average equipment cost, based on both the average daily rental and the cost per day if owned and depreciated. The costs of daily maintenance and the operator are included.

The Average Total Unit Cost column (11) includes the sum of the Material, Equipment, and Labor Cost columns. It doesn't include an allowance for overhead and profit.

The Average (Total) Price Including Overhead and Profit column (12) results from adding an overhead and profit allowance to Total Cost. This allowance reflects the author's interpretation of average fixed and variable overhead expenses and the labor intensiveness of the operation vs. the costs of materials for the operation. This allowance factor varies throughout the book, depending on the operation. Each contractor interprets O&P differently. The range can be from 15 percent to 80 percent of the Average Total Unit Cost.

Estimating Techniques

Estimating Repair/Remodeling Jobs: The unforeseen, unpredictable, or unexpected can ruin you.

Each year, the residential repair and remodeling industry grows. It's currently outpacing residential new construction due to increases in land costs, labor wage rates, interest rates, material costs, and economic uncertainty. When people can't afford a new home, they tend to remodel their old one. And there are always houses that need repair, from natural disasters or accidents like fire. The professional repair and remodeling contractor is moving to the forefront of the industry.

Repair and remodeling spawns three occupations: the contractor and his workers, the insurance company property claims adjuster, and the property damage appraiser. Each of these professionals shares common functions, including estimating the cost of the repair or remodeling work.

Estimating isn't an exact science. Yet the estimate determines the profit or loss for the contractor, the fairness of the claim payout by the adjuster, and the amount of grant or loan by the appraiser. Quality estimating must be uppermost in the mind of each of these professionals. And accurate estimates are possible only when you know exactly what materials are needed and the number of manhours required for demolition, removal, and installation. Remember, profits follow the professional. To be profitable you must control costs — and cost control is directly related to accurate, professional estimates.

There are four general types of estimates, each with a different purpose and a corresponding degree of accuracy:

- The guess method: "All bathrooms cost \$5,000." or "It looks like an \$8,000 job to me."
- The per measure method: (I like to call it the surprise package.) "Remodeling costs \$60 per SF, the job is 500 SF, so the price is \$30,000."

These two methods are the least accurate and accomplish little for the adjuster or the appraiser. The contractor might use the methods for qualifying customers (e.g., "I thought a bathroom would only cost \$2,000."), but never as the basis for bidding or negotiating a price.

- The piece estimate or stick-by-stick method.
- The unit cost estimate method.

These two methods yield a detailed estimate itemizing all of the material quantities and costs, the labor manhours and wage rates, the subcontract costs, and the allowance for overhead and profit.

Though time-consuming, the detailed estimate is the most accurate and predictable. It's a very satisfactory

tool for negotiating either the contract price or the adjustment of a building loss. The piece estimate and the unit cost estimate rely on historical data, such as manhours per specific job operation and recent material costs. The successful repair and remodeling contractor, or insurance/appraisal company, maintains records of previous jobs detailing allocation of crew manhours per day and materials expended.

While new estimators don't have historical data records, they can rely on reference books, magazines, and newsletters to estimate manhours and material costs. It is important to remember that **the reference must pertain to repair and remodeling**. This book is designed *specifically* to meet this requirement.

The reference material must specialize in repair and remodeling work because there's a large cost difference between new construction and repair and remodeling. Material and labor construction costs vary radically with the size of the job or project. Economies of scale come into play. The larger the quantity of materials, the better the purchase price should be. The larger the number of units to be installed, the greater the labor efficiency.

Repair and remodeling work, compared to new construction, is more expensive due to a normally smaller volume of work. Typical repair work involves only two or three rooms of a house, or one roof. In new construction, the job size may be three to five complete homes or an entire development. And there's another factor: a lot of repair and remodeling is done with the house occupied, forcing the crew to work around the normal, daily activities of the occupants. In new construction, the approach is systematic and logical — work proceeds from the ground up to the roof and to the inside of the structure.

Since the jobs are small, the repair and remodeling contractor doesn't employ trade specialists. Repairers employ the "jack-of-all-trades" who is less specialized and therefore less efficient. This isn't to say the repairer is less professional than the trade specialist. On the contrary, the repairer must know about many more facets of construction: not just framing, but painting, finish carpentry, roofing, and electrical as well. But because the repairer has to spread his expertise over a greater area, he will be less efficient than the specialist who repeats the same operation all day long.

Another factor reducing worker efficiency is poor access to the work area. With new construction, where building is an orderly "from the ground up" approach, workers have easy access to the work area for any given operation. The workers can spread out as much as needed, which facilitates efficiency and minimizes the manhours required to perform a given operation.

The opposite situation exists with repair and remodeling construction. Consider an example where the work area involves fire damage on the second floor. Materials either go up through the interior stairs or through a second

story window. Neither is easy when the exterior and interior walls have a finished covering such as siding and drywall. That results in greater labor costs with repair and remodeling because it takes more manhours to perform many of the same tasks.

If, as a professional estimator, you want to start collecting historical data, the place to begin is with daily worker time sheets that detail:

1. total hours worked by each worker per day
2. what specific operations each worker performed that day
3. how many hours (to the nearest tenth) each worker used in each operation performed that day.

Second, you must catalog all material invoices daily, being sure that quantities and unit costs per item are clearly indicated.

Third, maintain a record of overhead expenses attributable to the particular project. Then, after a number of jobs, you'll be able to calculate an average percentage of the job's gross amount that's attributable to overhead. Many contractors add 45% for overhead and profit to their total direct costs (direct labor, direct material, and direct subcontract costs). But that figure may not be right for your jobs.

Finally, each week you should reconcile in a job summary file the actual costs versus the estimated costs, and determine why there is any difference. This information can't immediately help you on this job since the contract has been signed, but it will be invaluable to you on your next job.

Up to now I've been talking about general estimating theory. Now let's be more specific. On page 8 is a Building Repair Estimate form. Each line is keyed to an explanation. A filled-out copy of the form is also provided, and on page 10, a blank, full-size copy that you can reproduce for your own use.

You can adapt the Building Repair Estimate form, whether you're a contractor, adjuster, or appraiser. Use of the form will yield a detailed estimate that will identify:

- The room or area involved, including sizes, dimensions and measurements.
- The kind and quality of material to be used.
- The quantities of materials to be used and verification of their prices.
- The type of work to be performed (demolish, remove, install, remove and reset) by what type of crew.
- The crew manhours per job operation and verification of the hourly wage scale.
- All arithmetical calculations that can be verified.
- Areas of difference between your estimate and others.

- Areas that will be a basis for negotiation and discussion of details.

Each job estimate begins with a visual inspection of the work site. If it's a repair job, you've got to see the damage. Without a visual inspection, you can't select a method of repair and you can't properly evaluate the opinions of others regarding repair or replacement. With either repair or remodeling work, the visual inspection is essential to uncover the "hiders" — the unpredictable, unforeseen, and unexpected problems that can turn profit into loss, or simplicity into nightmare. You're looking for the many variables and unknowns that exist behind an exterior or interior wall covering.

Along with the Building Repair Estimate form, use this checklist to make sure you're not forgetting anything.

Checklist

- Site accessibility: Will you store materials and tools in the garage? Is it secure? You can save a half hour to an hour each day by storing tools in the garage. Will the landscaping prevent trucks from reaching the work site? Are wheelbarrows or concrete pumpers going to be required?
- Soil: What type and how much water content? Will the soil change your excavation estimate?
- Utility lines: What's under the soil and where? Should you schedule the utilities to stake their lines?
- Soundness of the structure: If you're going to remodel, repair or add on, how sound is that portion of the house that you're going to have to work around? Where are the load-bearing walls? Are you going to remove and reset any walls? Do the floor joists sag?
- Roof strength: Can the roof support the weight of another layer of shingles. (Is four layers of composition shingles already too much?)
- Electrical: Is another breaker box required for the additional load?

This checklist is by no means complete, but it is a start. Take pictures! A digital camera will quickly pay for itself. When you're back at the office, the picture helps reconstruct the scene. Before and after pictures are also a sales tool representing your professional expertise.

During the visual inspection always be asking yourself "what if" this or that happened. Be looking for potential problem areas that would be extremely labor intensive or expensive in material to repair or replace.

Also spend some time getting to know your clients and their attitudes. Most of repair and remodeling work occurs while the house is occupied. If the work will be messy, let the homeowners know in advance. Their satisfaction is your ultimate goal — and their satisfaction will provide you a pleasant working atmosphere. You're there to communicate with them. At the end of an estimate and visual inspection, the homeowner should have a clear idea of what you can or can't do, how it will be

done, and approximately how long it will take. Don't discuss costs now! Save the estimating for your quiet office with a print-out calculator and your cost files or reference books.

What you create on your estimate form during a visual inspection is a set of rough notes and diagrams that make the estimate speak. To avoid duplications and omissions, estimate in a *systematic sequence of inspection*. There are two questions to consider. First, where do you start the estimate? Second, in what order will you list the damaged or replaced items? It's customary to start in the room having either the most damage or requiring the most extensive remodeling. The sequence of listing is important. Start with either the floor or the ceiling. When starting with the floor, you might list items in the following sequence: Joists, subfloor, finish floor, base — listing from bottom to top. When starting with the ceiling, you reverse, and list from top to bottom. The important thing is to be consistent as you go from room to room! It's a good idea to figure the roof and foundation separately, instead of by the room.

After completing your visual inspection, go back to your office to cost out the items. Talk to your material supply houses and get unit costs for the quantity involved. Consult your job files or reference books and assign crew manhours to the different job operations.

There's one more reason for creating detailed estimates. Besides an estimate, what else have your notes given you? A material take-off sheet, a lumber list, a plan and specification sheet — the basis for writing a job summary for comparing estimated costs and profit versus actual costs and profit — and a project schedule that minimizes down time.

Here's the last step: Enter an amount for overhead and profit. No matter how small or large your work volume is, be realistic — everyone has overhead and every business entity works to make a fair and reasonable profit. An office, even in your home, costs

money to operate. If family members help out, pay them. Everyone's time is valuable!

If you expect there will be a supervising general contractor on the job, and the overhead and profit is computed as a percentage of the job, then overhead and profit dollars automatically adjust to the job size and the job complexity.

Don't forget to charge for performing your estimate. A professional expects to be paid. You'll render a better product if you know you're being paid for your time. If you want to soften the blow to the owner, say the first hour is free or that the cost of the estimate will be deducted from the job price if you get the job.

In conclusion, whether you're a contractor, adjuster, or appraiser, you're selling your personal service, your ideas, and your reputation. To be successful you must:

- Know yourself and your capabilities.
- Know what the job will require by ferreting out the "hiders."
- Know your products and your work crew.
- Know your productivity and be able to deliver in a reasonable manner and within a reasonable time frame.
- Know your client and make it clear that all change orders, no matter how large or small, will cost money.



When the *National Estimator* program has been installed, click Help on the menu bar to see a list of topics that will get you up and running. Or, go online to www.craftsman-book.com, click on "Support," then "Tutorials" to view an interactive video for *National Estimator*.

Building Repair Estimate

[illegible]

Keyed Explanations of the Building Repair Estimate Form

1. Insert name of insured(s).
2. Insert claim number or, if claim number is not available, insert policy number or binder number.
3. Insert the page number and the total number of pages.
4. Insert street address, city and state where loss or damage occurred.
5. Insert type of loss (wind, hail, fire, water, etc.)
6. Check YES if there is other insurance, whether collectible or not. Check NO if there's only one insurer.
7. Insert the present replacement cost of the building. What would it cost to build the structure today?
8. Insert present actual cash value of the building.
9. Insert the amount of insurance applicable. If there is more than one insurer, insert the total amount of applicable insurance provided by all insurers.
10. If the amount of insurance required is based on replacement cost value, circle RCV and insert the percent required by the policy, if any.
11. If the amount of insurance required is based on actual cash value, circle ACV and insert the percent required by the policy, if any.
Note: (regarding 10 and 11) if there is a non-concurrency, i.e., one insurer requires insurance to 90% of value while another requires insurance to 80% of value, make a note here. Comment on the non-concurrency in the settlement report.
12. The installed price and/or material price only, as expressed in columns 13 through 15, may include any of the following (expressed in units and unit prices):
 - Material only (no labor)
 - Material and labor to replace
 - Material and labor to remove and replace

Unit Cost is determined by dividing dollar cost by quantity. The term cost, as used in unit cost, is not intended to include any allowance, percentage or otherwise, for overhead or profit. Usually, overhead and profit are expressed as a percentage of cost. Cost must be determined first. Insert a line or dash in a space(s) in columns 13, 14, 15, 17, 18 or 19 if the space is not to be used.
13. The *units* column includes both the quantity and the unit of measure, i.e., 100 SF, 100 BF, 200 CF, 100 CY, 20 ea., etc.
14. The *unit price* may be expressed in dollars, cents or both. If the units column has 100 SF and if the unit price column has \$.10, this would indicate the price to be \$.10 per SF.
15. The *total* column is merely the dollar product of the quantity (in column 13) times the price per unit measure (in column 14).
16. 16-19. These columns are normally used to express labor as follows: hours times rate per hour. However, it is possible to express labor as a unit price, i.e., 100 SF in column 13, a dash in column 17, \$.05 in column 18 and \$5.00 in column 19.
20. Under *description of item*, the following may be included:
 - Description of item to be repaired or replaced (studs 2" x 4" 8'0" #2 Fir, Sheetrock 1/2", etc.)
 - Quantities or dimensions (20 pcs., 8'0" x 14'0", etc.)
 - Location within a room or area (north wall, ceiling, etc.)
 - Method of correcting damage (paint - 1 coat; sand, fill and finish; R&R; remove only; replace; resize; etc.)
- 21-22. Dollar totals of columns A and B respectively.
- 23-27. Spaces provided for items not included in the body of the estimate (subtotals, overhead, profit, sales tax, etc.)
28. Total cost of repair.
29. Insert the agreed amount here. The agreement may be between the claim representative and the insured or between the claim rep and the repairer. If the agreed price is different from the grand total, the reason(s) for the difference should be itemized on the estimate sheet. If there is no room, attach an additional estimate sheet.
30. PRINT the name of the insured or the repairer so that it is legible.
31. PRINT the address of the insured or repairer legibly. Include phone number.
32. The insured or a representative of the repairer should sign here indicating agreement with the claim rep's estimate.
33. Insured or representative of the repairer should insert date here.
34. Claim rep should sign here.
35. Claim rep should insert date here.
36. Insert name of service office here.

[illegible]

Wage Rates Used in This Book

Wage rates listed here and used in this book were compiled in the fall of 2018 and projected to mid-2019. Wage rates are in dollars per hour.

"Base Wage Per Hour" (Col. 1) includes items such as vacation pay and sick leave which are normally taxed as wages. Nationally, these benefits average 5.48% of the Base Wage Per Hour. This amount is paid by the Employer in addition to the Base Wage Per Hour.

"Liability Insurance and Employer Taxes" (Cols. 3 & 4) include national averages for state unemployment insurance (4.00%), federal unemployment insurance (0.60%), Social Security and Medicare tax (7.65%), liability

insurance (2.29%), and Workers' Compensation Insurance which varies by trade. This total percentage (Col. 3) is applied to the sum of Base Wage Per Hour and Taxable Fringe Benefits (Col. 1 + Col. 2) and is listed in Dollars (Col. 4). This amount is paid by the Employer in addition to the Base Wage Per Hour and the Taxable Fringe Benefits.

"Non-Taxable Fringe Benefits" (Col. 5) include employer-sponsored medical insurance and other benefits, which nationally average 4.84% of the Base Wage Per Hour.

"Total Hourly Cost Used In This Book" is the sum of Columns 1, 2, 4, & 5.

Trade	1 Base Wage Per Hour	2 Taxable Fringe Benefits (5.48% of Base Wage)	3 Liability Insurance & Employer Taxes %	4 \$	5 Non-Taxable Fringe Benefits (4.84% of Base Wage)	6 Total Hourly Cost Used in This Book
Air Tool Operator	\$31.69	\$1.74	25.95%	\$8.68	\$1.54	\$43.65
Bricklayer or Stone Mason	\$27.48	\$1.51	25.06%	\$7.26	\$1.33	\$37.58
Bricktender	\$20.36	\$1.12	25.06%	\$5.38	\$0.99	\$27.85
Carpenter	\$25.85	\$1.42	31.17%	\$8.50	\$1.25	\$37.02
Cement Mason	\$26.13	\$1.43	22.97%	\$6.33	\$1.27	\$35.16
Drywall Installer	\$26.74	\$1.47	23.32%	\$6.58	\$1.30	\$36.09
Drywall Taper	\$26.69	\$1.47	23.32%	\$6.57	\$1.29	\$36.02
Electrician, Journeyman Wireman	\$30.65	\$1.68	19.71%	\$6.37	\$1.49	\$40.19
Equipment Operator	\$30.93	\$1.70	24.95%	\$8.14	\$1.50	\$42.27
Fence Erector	\$27.91	\$1.53	25.74%	\$7.58	\$1.35	\$38.37
Floor Layer: Carpet, Linoleum, Soft Tile	\$25.08	\$1.38	23.61%	\$6.25	\$1.22	\$33.93
Floor Layer: Hardwood	\$26.33	\$1.45	23.61%	\$6.56	\$1.28	\$35.62
Glazier	\$26.08	\$1.43	25.47%	\$7.01	\$1.26	\$35.78
Laborer, General Construction	\$20.78	\$1.14	32.27%	\$7.07	\$1.01	\$30.00
Lather	\$26.83	\$1.47	21.12%	\$5.98	\$1.30	\$35.58
Marble Setter	\$24.80	\$1.36	21.20%	\$5.55	\$1.20	\$32.91
Millwright / Finish Carpenter	\$26.29	\$1.44	21.09%	\$5.85	\$1.28	\$34.86
Mosaic & Terrazzo Setter	\$26.35	\$1.45	21.20%	\$5.89	\$1.28	\$34.97
Mosaic & Terrazzo Setter Helper	\$20.16	\$1.11	21.20%	\$4.51	\$0.98	\$26.76
Painter, Brush	\$27.74	\$1.52	24.65%	\$7.21	\$1.35	\$37.82
Painter, Spray-Gun	\$28.57	\$1.57	24.65%	\$7.43	\$1.39	\$38.96
Paperhanger	\$29.13	\$1.60	24.65%	\$7.57	\$1.41	\$39.71
Plasterer	\$26.46	\$1.45	28.21%	\$7.87	\$1.28	\$37.06
Plasterer Helper	\$20.76	\$1.14	28.21%	\$6.18	\$1.01	\$29.09
Plumber	\$31.69	\$1.74	24.08%	\$8.05	\$1.54	\$43.02
Reinforcing Ironworker	\$27.78	\$1.53	28.27%	\$8.29	\$1.35	\$38.95
Roofer, Foreman	\$29.10	\$1.60	43.34%	\$13.30	\$1.41	\$45.41
Roofer, Journeyman	\$26.45	\$1.45	43.34%	\$12.09	\$1.28	\$41.27
Roofer, Hot Mop Pitch	\$27.24	\$1.50	43.34%	\$12.46	\$1.32	\$42.52
Roofer, Wood Shingles	\$27.77	\$1.52	43.34%	\$12.70	\$1.35	\$43.34
Sheet Metal Worker	\$30.34	\$1.67	25.74%	\$8.24	\$1.47	\$41.72
Tile Setter	\$26.59	\$1.46	21.20%	\$5.95	\$1.29	\$35.29
Tile Setter's Helper	\$20.16	\$1.11	21.20%	\$4.51	\$0.98	\$26.76
Truck Driver	\$22.37	\$1.23	25.95%	\$6.12	\$1.08	\$30.80

Area Modification Factors

Construction costs are higher in some areas than in other areas. Add or deduct the percentages shown on the following pages to adapt the costs in this book to your job site. Adjust your cost estimate by the appropriate percentages in this table to find the estimated cost for the site selected. Where 0% is shown, it means no modification is required.

Modification factors are listed alphabetically by state and province. Areas within each state are listed by the first three digits of the postal zip code. For convenience, one representative city is identified in each three-digit zip or range of zips. Percentages are based on the average of all data points in the table.

Alabama Average -4%			Herlong	961.....22%
Anniston	362.....-8%		Inglewood	902-9059%
Auburn	368.....-4%		Irvine	926-92713%
Bellamy	369.....-5%		Lompoc	934.....-3%
Birmingham	350-3522%		Long Beach	907-9089%
Dothan	363.....-7%		Los Angeles	900-9018%
Evergreen	364.....-10%		Marysville	959.....22%
Gadsden	359.....-9%		Modesto	953.....1%
Huntsville	358.....-1%		Mojave	935.....5%
Jasper	355.....-8%		Novato	949.....26%
Mobile	365-366-2%		Oakland	945-94732%
Montgomery	360-361-2%		Orange	928.....12%
Scottsboro	357.....-4%		Oxnard	930.....2%
Selma	367.....-5%		Pasadena	910-9129%
Sheffield	356.....0%		Rancho Cordova	956-9574%
Tuscaloosa	354.....-4%		Redding	960.....-3%
Alaska Average 23%			Richmond	948.....17%
Anchorage	995.....26%		Riverside	925.....4%
Fairbanks	997.....27%		Sacramento	958.....3%
Juneau	998.....19%		Salinas	939.....1%
Ketchikan	999.....18%		San Bernardino	923-9242%
King Salmon	996.....23%		San Diego	919-9218%
Arizona Average -4%			San Francisco	941.....27%
Chambers	865.....-8%		San Jose	950-95117%
Douglas	855.....-8%		San Mateo	943-94421%
Flagstaff	860.....-7%		Santa Barbara	931.....7%
Kingman	864.....-5%		Santa Rosa	954.....5%
Mesa	852.....3%		Stockton	952.....4%
Phoenix	850.....3%		Sunnyvale	940.....20%
Prescott	863.....-6%		Van Nuys	913-9168%
Show Low	859.....-7%		Whittier	906.....8%
Tucson	856-857-5%		Colorado Average 1%	
Yuma	853.....2%		Aurora	800-8017%
Arkansas Average -7%			Boulder	803-8044%
Batesville	725.....-9%		Colorado	
Camden	717.....-2%		Springs	808-8090%
Fayetteville	727.....-4%		Denver	802.....8%
Fort Smith	729.....-7%		Durango	813.....-1%
Harrison	726.....-12%		Fort Morgan	807.....-2%
Hope	718.....-8%		Glenwood	
Hot Springs	719.....-13%		Springs	816.....4%
Jonesboro	724.....-9%		Grand Junction	814-8150%
Little Rock	720-722-3%		Greeley	806.....5%
Pine Bluff	716.....-11%		Longmont	805.....2%
Russellville	728.....-4%		Pagosa Springs	811.....-4%
West Memphis	723.....-2%		Pueblo	810.....0%
California Average 9%			Salida	812.....-6%
Alhambra	917-9188%		Connecticut Average 8%	
Bakersfield	932-9332%		Bridgeport	66.....6%
El Centro	922.....0%		Bristol	60.....12%
Eureka	955.....20%		Fairfield	64.....9%
Fresno	936-938-2%		Hartford	61.....11%
			New Haven	65.....7%

Factors listed for each state and province are the average of all data points in that state or province. Figures for three-digit zips are the average of all five-digit zips in that area, and are the weighted average of factors for labor, material and equipment.

The National Estimator program will apply an area modification factor for any five-digit zip you select. Click Utilities. Click Options. Then select the Area Modification Factors tab.

These percentages are composites of many costs and will not necessarily be accurate when estimating the cost of any particular part of a building. But when used to modify costs for an entire structure, they should improve the accuracy of your estimates

Norwich	63.....3%	Hawaii Average 20%	
Stamford	068-06912%	Aliamanu	968.....22%
Waterbury	67.....6%	Ewa	967.....20%
West Hartford	62.....5%	Halawa Heights	967.....20%
Delaware Average 2%		Hilo	967.....20%
Dover	199.....-4%	Honolulu	968.....22%
Newark	197.....6%	Kailua	968.....22%
Wilmington	198.....-4%	Lualualei	967.....20%
District of Columbia		Mililani Town	967.....20%
Washington	200-20512%	Pearl City	967.....20%
Florida Average -5%		Wahiawa	967.....20%
Altamonte		Waianae	967.....20%
Springs	327.....-3%	Wailuku (Maui)	967.....20%
Bradenton	342.....-6%	Idaho Average -9%	
Brooksville	346.....-7%	Boise	837.....-5%
Daytona Beach	321.....-9%	Coeur d'Alene	838.....-10%
Fort Lauderdale	333.....2%	Idaho Falls	834.....-9%
Fort Myers	339.....-6%	Lewiston	835.....-11%
Fort Pierce	349.....-10%	Meridian	836.....-9%
Gainesville	326.....-9%	Pocatello	832.....-10%
Jacksonville	322.....-2%	Sun Valley	833.....-8%
Lakeland	338.....-8%	Illinois Average 4%	
Melbourne	329.....-8%	Arlington Heights	600.....14%
Miami	330-3321%	Aurora	605.....14%
Naples	341.....-2%	Belleville	622.....0%
Ocala	344.....-12%	Bloomington	617.....-1%
Orlando	328.....1%	Carbondale	629.....-4%
Panama City	324.....-11%	Carol Stream	601.....14%
Pensacola	325.....-8%	Centralia	628.....-3%
Saint Augustine	320.....-2%	Champaign	618.....-2%
Saint Cloud	347.....-2%	Chicago	606-60815%
St Petersburg	337.....-6%	Decatur	623.....-7%
Tallahassee	323.....-6%	Galesburg	614.....-4%
Tampa	335-336-1%	Granite City	620.....3%
W. Palm Beach	334.....-2%	Green River	612.....5%
Georgia Average -4%		Joliet	604.....13%
Albany	317.....-6%	Kankakee	609.....-3%
Athens	306.....-5%	Lawrenceville	624.....-6%
Atlanta	303.....12%	Oak Park	603.....18%
Augusta	308-309-2%	Peoria	615-6166%
Buford	305.....-2%	Peru	613.....2%
Calhoun	307.....-9%	Quincy	602.....16%
Columbus	318-319-3%	Rockford	610-6113%
Dublin/Fort Valley	310.....-8%	Springfield	625-6270%
Hinesville	313.....-6%	Urbana	619.....-4%
Kings Bay	315.....-10%	Indiana Average -3%	
Macon	312.....-4%	Aurora	470.....-5%
Marietta	300-3024%	Bloomington	474.....-2%
Savannah	314.....-4%	Columbus	472.....-4%
Statesboro	304.....-11%	Elkhart	465.....-4%
Valdosta	316.....-1%	Evansville	476-4774%

Fort Wayne	467-468	-1%	Maine Average	-5%	Meridian	393	3%	New Mexico Average	-8%			
Gary	463-464	8%	Auburn	42	-4%	Tupelo	388	-7%	Alamogordo	883	-11%	
Indianapolis	460-462	4%	Augusta	43	-5%	Missouri Average	-3%	Albuquerque	870-871	-3%		
Jasper	475	-8%	Bangor	44	-6%	Cape Girardeau	637	-5%	Clovis	881	-11%	
Jeffersonville	471	-5%	Bath	45	-6%	Caruthersville	638	-7%	Farmington	874	-1%	
Kokomo	469	-8%	Brunswick	039-040	-1%	Chillicothe	646	-4%	Fort Sumner	882	-2%	
Lafayette	479	-5%	Camden	48	-10%	Columbia	652	-4%	Gallup	873	-7%	
Muncie	473	-8%	Cutler	46	-7%	East Lynne	647	4%	Holman	877	-10%	
South Bend	466	-2%	Dexter	49	-4%	Farmington	636	-8%	Las Cruces	880	-8%	
Terre Haute	478	-3%	Northern Area	47	-8%	Hannibal	634	-2%	Santa Fe	875	-8%	
Iowa Average	-3%		Portland	41	2%	Independence	640	5%	Socorro	878	-14%	
Burlington	526	1%	Maryland Average	2%	Jefferson City	650-651	-5%	Truth or Consequences	879	-8%		
Carroll	514	-11%	Annapolis	214	8%	Joplin	648	-6%	Tucumcari	884	-8%	
Cedar Falls	506	-4%	Baltimore	210-212	7%	Kansas City	641	6%	New York Average	6%		
Cedar Rapids	522-524	2%	Bethesda	208-209	13%	Kirksville	635	-15%	Albany	120-123	7%	
Cherokee	510	1%	Church Hill	216	-4%	Knob Noster	653	3%	Amityville	117	9%	
Council Bluffs	515	-1%	Cumberland	215	-8%	Lebanon	654-655	-12%	Batavia	140	1%	
Creston	508	1%	Elkton	219	-5%	Poplar Bluff	639	-10%	Binghamton	137-139	-2%	
Davenport	527-528	1%	Frederick	217	7%	Saint Charles	633	1%	Bronx	104	10%	
Decorah	521	-8%	Laurel	206-207	8%	Saint Joseph	644-645	-1%	Brooklyn	112	7%	
Des Moines	500-503	5%	Salisbury	218	-6%	Springfield	656-658	-8%	Buffalo	142	2%	
Dubuque	520	-4%	Massachusetts Average	12%	St Louis	630-631	8%	Elmira	149	-3%		
Fort Dodge	505	-3%	Ayer	015-016	6%	Montana Average	-3%	Flushing	113	15%		
Mason City	504	-3%	Bedford	17	15%	Billings	590-591	-2%	Garden City	115	15%	
Ottumwa	525	-6%	Boston	021-022	37%	Butte	597	-3%	Hicksville	118	14%	
Sheldon	512	-7%	Brockton	023-024	20%	Fairview	592	12%	Ithaca	148	-5%	
Shenandoah	516	-14%	Cape Cod	26	4%	Great Falls	594	-6%	Jamaica	114	14%	
Sioux City	511	5%	Chicopee	10	7%	Havre	595	-9%	Jamestown	147	-7%	
Spencer	513	-7%	Dedham	19	18%	Helena	596	-2%	Kingston	124	-4%	
Waterloo	507	-3%	Fitchburg	14	11%	Kalispell	599	-6%	Long Island	111	30%	
Kansas Average	0%		Hingham	20	19%	Miles City	593	-7%	Montauk	119	7%	
Colby	677	-8%	Lawrence	18	14%	Missoula	598	-6%	New York (Manhattan)	100-102	31%	
Concordia	669	-12%	Nantucket	25	9%	Nebraska Average	-8%	New York City	100-102	31%		
Dodge City	678	-4%	New Bedford	27	6%	Alliance	693	-10%	Newcomb	128	0%	
Emporia	668	8%	Northfield	13	2%	Columbus	686	-7%	Niagara Falls	143	-6%	
Fort Scott	667	-6%	Pittsfield	12	1%	Grand Island	688	-8%	Plattsburgh	129	-1%	
Hays	676	-13%	Springfield	11	8%	Hastings	689	-9%	Poughkeepsie	125-126	1%	
Hutchinson	675	-6%	Michigan Average	1%	Lincoln	683-685	-4%	Queens	110	17%		
Independence	673	29%	Battle Creek	490-491	-1%	McCook	690	-9%	Rochester	144-146	2%	
Kansas City	660-662	5%	Detroit	481-482	7%	Norfolk	687	-10%	Rockaway	116	10%	
Liberal	679	14%	Flint	484-485	-4%	North Platte	691	-6%	Rome	133-134	-4%	
Salina	674	-7%	Grand Rapids	493-495	1%	Omaha	680-681	0%	Staten Island	103	8%	
Topeka	664-666	-1%	Grayling	497	-7%	Valentine	692	-15%	Stewart	127	-5%	
Wichita	670-672	-4%	Jackson	492	-1%	Nevada Average	1%	Syracuse	130-132	2%		
Kentucky Average	-4%		Lansing	488-489	0%	Carson City	897	-4%	Tonawanda	141	-1%	
Ashland	411-412	-4%	Marquette	498-499	3%	Elko	898	9%	Utica	135	-6%	
Bowling Green	421	-5%	Pontiac	483	12%	Ely	893	-3%	Watertown	136	-1%	
Campton	413-414	-11%	Royal Oak	480	7%	Fallon	894	0%	West Point	109	6%	
Covington	410	2%	Saginaw	486-487	-5%	Las Vegas	889-891	3%	White Plains	105-108	14%	
Elizabethtown	427	-10%	Traverse City	496	-2%	Reno	895	-1%	North Carolina Average	2%		
Frankfort	406	7%	Minnesota Average	-1%	New Hampshire Average	-1%	Charlestown	36	-5%	Asheville	287-289	-7%
Hazard	417-418	-10%	Bemidji	566	-6%	Concord	34	-3%	Charlotte	280-282	7%	
Hopkinsville	422	-5%	Brainerd	564	-3%	Dover	38	1%	Durham	277	0%	
Lexington	403-405	1%	Duluth	556-558	2%	Lebanon	37	-3%	Elizabeth City	279	0%	
London	407-409	-7%	Fergus Falls	565	-10%	Littleton	35	-6%	Fayetteville	283	2%	
Louisville	400-402	2%	Magnolia	561	-8%	Manchester	032-033	2%	Goldsboro	275	8%	
Owensboro	423	-4%	Mankato	560	-4%	New Boston	030-031	3%	Greensboro	274	5%	
Paducah	420	0%	Minneapolis	553-555	13%	New Jersey Average	9%	Hickory	286	0%		
Pikeville	415-416	-8%	Rochester	559	-1%	Atlantic City	080-084	4%	Kinston	285	-1%	
Somerset	425-426	-11%	St Cloud	563	2%	Brick	87	2%	Raleigh	276	2%	
White Plains	424	-4%	St Paul	550-551	12%	Dover	78	9%	Rocky Mount	278	1%	
Louisiana Average	2%		Thief River Falls	567	-2%	Edison	088-089	13%	Wilmington	284	2%	
Alexandria	713-714	-2%	Willmar	562	-6%	Hackensack	76	10%	Winston-Salem	270-273	4%	
Baton Rouge	707-708	10%	Mississippi Average	-6%	Monmouth	77	12%	North Dakota Average	4%			
Houma	703	4%	Clarksdale	386	-9%	Newark	071-073	11%	Bismarck	585	3%	
Lafayette	705	16%	Columbus	397	0%	Passaic	70	12%	Dickinson	586	15%	
Lake Charles	706	21%	Greenville	387	-14%	Paterson	074-075	7%	Fargo	580-581	0%	
Mandeville	704	-3%	Greenwood	389	-10%	Princeton	85	10%	Grand Forks	582	-1%	
Minden	710	-5%	Gulfport	395	-6%	Summit	79	16%				
Monroe	712	-8%	Jackson	390-392	-3%	Trenton	86	7%				
New Orleans	700-701	2%	Laurel	394	-7%							
Shreveport	711	-4%	McComb	396	-11%							

Jamestown	584.....-4%	New Castle	161.....-3%	Houston	770-77239%	Huntington	255-257-4%
Minot	587.....9%	Philadelphia	190-19111%	Huntsville	773.....39%	Lewisburg	249.....-14%
Nekoma	583.....-10%	Pittsburgh	152.....6%	Longview	756.....1%	Martinsburg	254.....-5%
Williston	588.....21%	Pottsville	179.....-8%	Lubbock	793-794-7%	Morgantown	265.....-4%
Ohio Average	0%	Punxsutawney	157.....-3%	Lufkin	759.....21%	New Martinsville	262.....-9%
Akron	442-4431%	Reading	195-1962%	McAllen	785.....-6%	Parkersburg	261.....1%
Canton	446-447-2%	Scranton	184-1851%	Midland	797.....10%	Romney	267.....-7%
Chillicothe	456.....-2%	Somerset	155.....-9%	Palestine	758.....2%	Sugar Grove	268.....-8%
Cincinnati	450-4523%	Southeastern	193.....8%	Plano	750.....7%	Wheeling	260.....5%
Cleveland	440-4413%	Uniontown	154.....-6%	San Angelo	769.....-6%	Wisconsin Average	0%
Columbus	432.....5%	Valley Forge	194.....11%	San Antonio	780-78216%	Amery	540.....-1%
Dayton	453-4551%	Warminster	189.....11%	Texarkana	755.....-8%	Beloit	535.....5%
Lima	458.....-5%	Warrendale	150-1515%	Tyler	757.....-7%	Clam Lake	545.....-8%
Marietta	457.....-5%	Washington	153.....8%	Victoria	779.....25%	Eau Claire	547.....-2%
Marion	433.....-6%	Wilkes Barre	186-187-1%	Waco	765-767-3%	Green Bay	541-5433%
Newark	430-4313%	Williamsport	177.....-2%	Wichita Falls	763.....-9%	La Crosse	546.....0%
Sandusky	448-449-3%	York	173-174-1%	Woodson	764.....-3%	Ladysmith	548.....-2%
Steubenville	439.....1%	Rhode Island Average	5%	Utah Average	-3%	Madison	537.....8%
Toledo	434-4367%	Bristol	28.....5%	Clearfield	840.....0%	Milwaukee	530-5346%
Warren	444.....-5%	Coventry	28.....5%	Green River	845.....-3%	Oshkosh	549.....4%
Youngstown	445.....-3%	Cranston	29.....6%	Ogden	843-844-9%	Portage	539.....0%
Zanesville	437-438-1%	Davisville	28.....5%	Provo	846-847-6%	Prairie du Chien	538.....-7%
Oklahoma Average	-5%	Narragansett	28.....5%	Salt Lake City	841.....1%	Wausau	544.....-3%
Adams	739.....-10%	Newport	28.....5%	Vermont Average	-5%	Wyoming Average	-1%
Ardmore	734.....-1%	Providence	29.....6%	Albany	58.....-7%	Casper	826.....1%
Clinton	736.....-3%	Warwick	28.....5%	Battleboro	53.....-4%	Cheyenne/	
Durant	747.....-11%	South Carolina Average	3%	Beecher Falls	59.....-8%	Laramie	820.....-2%
Enid	737.....-4%	Aiken	298.....4%	Bennington	52.....-6%	Gillette	827.....3%
Lawton	735.....-8%	Beaufort	299.....-2%	Burlington	54.....-4%	Powell	824.....-3%
McAlester	745.....-7%	Charleston	294.....7%	Montpelier	56.....-4%	Rawlins	823.....8%
Muskogee	744.....-8%	Columbia	290-2926%	Rutland	57.....-7%	Riverton	825.....-6%
Norman	730.....-4%	Greenville	296.....5%	Springfield	51.....-6%	Rock Springs	829-8311%
Oklahoma City	731.....-3%	Myrtle Beach	295.....0%	White River		Sheridan	828.....-3%
Ponca City	746.....-1%	Rock Hill	297.....3%	Junction	50.....-5%	Wheatland	822.....-3%
Poteau	749.....-7%	Spartanburg	293.....-3%	Virginia Average	-4%	CANADIAN AREA MODIFIERS	
Pryor	743.....-6%	South Dakota Average	-6%	Abingdon	242.....-9%	These figures assume an	
Shawnee	748.....-8%	Aberdeen	574.....-7%	Alexandria	220-22310%	exchange rate of \$1.00 Canadian	
Tulsa	740-7410%	Mitchell	573.....-6%	Charlottesville	229.....-6%	to \$0.76 U.S.	
Woodward	738.....5%	Mobridge	576.....-9%	Chesapeake	233.....-4%	Alberta	13%
Oregon Average	-3%	Pierre	575.....-10%	Culpeper	227.....-5%	Calgary	14%
Adrian	979.....-12%	Rapid City	577.....-8%	Farmville	239.....-12%	Edmonton	14%
Bend	977.....-5%	Sioux Falls	570-5711%	Fredericksburg	224-225-5%	Fort McMurray	12%
Eugene	974.....-3%	Watertown	572.....-4%	Galax	243.....-10%	British Columbia	7%
Grants Pass	975.....-5%	Tennessee Average	-2%	Harrisonburg	228.....-6%	Fraser Valley	6%
Klamath Falls	976.....-8%	Chattanooga	374.....2%	Lynchburg	245.....-9%	Okanagan	6%
Pendleton	978.....-3%	Clarksville	370.....1%	Norfolk	235-237-2%	Vancouver	9%
Portland	970-97210%	Cleveland	373.....-1%	Petersburg	238.....-3%	Manitoba	0%
Salem	973.....-2%	Columbia	384.....-7%	Radford	241.....-9%	North Manitoba	0%
Pennsylvania Average	-1%	Cookeville	385.....-8%	Reston	201.....7%	South Manitoba	0%
Allentown	181.....3%	Jackson	383.....-2%	Richmond	232.....2%	Selkirk	0%
Altoona	166.....-8%	Kingsport	376.....-5%	Roanoke	240.....-9%	Winnipeg	0%
Beaver Springs	178.....-5%	Knoxville	377-379-2%	Staunton	244.....-7%	New Brunswick	-13%
Bethlehem	180.....4%	McKenzie	382.....-8%	Tazewell	246.....-6%	Moncton	-13%
Bradford	167.....-8%	Memphis	380-3811%	Virginia Beach	234.....-2%	Nova Scotia	-8%
Butler	160.....-2%	Nashville	371-3722%	Williamsburg	230-231-3%	Amherst	-8%
Chambersburg	172.....-7%	Texas Average	11%	Winchester	226.....4%	Nova Scotia	-7%
Clearfield	168.....-3%	Abilene	795-796-2%	Washington Average	0%	Sydney	-8%
DuBois	158.....-10%	Amarillo	790-791-2%	Clarkston	994.....-8%	Newfoundland/	
East Stroudsburg	183.....-5%	Arlington	760.....1%	Everett	982.....2%	Labrador	-3%
Erie	164-165-6%	Austin	786-78720%	Olympia	985.....-2%	Ontario	7%
Genesee	169.....-4%	Bay City	774.....52%	Pasco	993.....1%	London	7%
Greensburg	156.....-4%	Beaumont	776-77731%	Seattle	980-98111%	Thunder Bay	6%
Harrisburg	170-1713%	Brownwood	768.....-8%	Spokane	990-992-3%	Toronto	7%
Hazleton	182.....-3%	Bryan	778.....21%	Tacoma	983-9842%	Quebec	-1%
Johnstown	159.....-9%	Childress	792.....-14%	Vancouver	986.....3%	Montreal	-1%
Kittanning	162.....-6%	Corpus Christi	783-78431%	Wenatchee	988.....-6%	Quebec City	-1%
Lancaster	175-176-1%	Dallas	751-7536%	Yakima	989.....-5%	Saskatchewan	4%
Meadville	163.....-9%	Del Rio	788.....0%	West Virginia Average	-5%	La Ronge	3%
Montrose	188.....-4%	El Paso	798-7991%	Beckley	258-259-5%	Prince Albert	2%
		Fort Worth	761-7622%	Bluefield	247-2480%	Saskatoon	5%
		Galveston	775.....37%	Charleston	250-2534%		
		Giddings	789.....0%	Clarksburg	263-264-7%		
		Greenville	754.....3%	Fairmont	266.....-11%		

Crew Compositions & Wage Rates

Crew Code		Manhours per day	Total costs \$/Hr.	\$/Day	Average Crew Rate (ACR) per Hour	Average Crew Rate (ACROP) per Hour w/O&P
AB	1 Air tool operator	8.00	\$43.65	\$349.20		
	1 Laborer	8.00	\$30.00	\$240.00		
	TOTAL	16.00		\$589.20	\$36.83	\$51.56
AD	2 Air tool operators	16.00	\$43.65	\$698.40		
	1 Laborer	8.00	\$30.00	\$240.00		
	TOTAL	24.00		\$938.40	\$39.10	\$54.74
BD	3 Bricklayers	24.00	\$37.58	\$901.92		
	2 Bricktenders	16.00	\$27.85	\$445.60		
	TOTAL	40.00		\$1,347.52	\$33.69	\$47.84
BK	1 Bricklayer	8.00	\$37.58	\$300.64		
	1 Bricktender	8.00	\$27.85	\$222.80		
	TOTAL	16.00		\$523.44	\$32.72	\$46.46
BO	2 Bricklayers	16.00	\$37.58	\$601.28		
	2 Bricktenders	16.00	\$27.85	\$445.60		
	TOTAL	32.00		\$1,046.88	\$32.72	\$46.46
2C	2 Carpenters	16.00	\$37.02	\$592.32	\$37.02	\$51.83
CA	1 Carpenter	8.00	\$37.02	\$296.16	\$37.02	\$51.83
CH	1 Carpenter	8.00	\$37.02	\$296.16		
	1/2 Laborer	4.00	\$30.00	\$120.00		
	TOTAL	12.00		\$416.16	\$34.68	\$48.55
CJ	1 Carpenter	8.00	\$37.02	\$296.16		
	1 Laborer	8.00	\$30.00	\$240.00		
	TOTAL	16.00		\$536.16	\$33.51	\$46.91
CN	2 Carpenters	16.00	\$37.02	\$592.32		
	1/2 Laborer	4.00	\$30.00	\$120.00		
	TOTAL	20.00		\$712.32	\$35.62	\$49.86
CS	2 Carpenters	16.00	\$37.02	\$592.32		
	1 Laborer	8.00	\$30.00	\$240.00		
	TOTAL	24.00		\$832.32	\$34.68	\$48.55
CT	1 Mosaic & terrazzo setter	8.00	\$34.97	\$279.76	\$34.97	\$49.66
CU	4 Carpenters	32.00	\$37.02	\$1,184.64		
	1 Laborer	8.00	\$30.00	\$240.00		
	TOTAL	40.00		\$1,424.64	\$35.62	\$49.86
CW	2 Carpenters	16.00	\$37.02	\$592.32		
	2 Laborers	16.00	\$30.00	\$480.00		
	TOTAL	32.00		\$1,072.32	\$33.51	\$46.91
CX	4 Carpenters	32.00	\$37.02	\$1,184.64	\$37.02	\$51.83

Crew Code		Manhours per day	Total costs \$/Hr.	\$/Day	Average Crew Rate (ACR) per Hour	Average Crew Rate (ACROP) per Hour w/O&P
CY	3 Carpenters	24.00	\$37.02	\$888.48		
	2 Laborers	16.00	\$30.00	\$480.00		
	1 Equipment operator	8.00	\$42.27	\$338.16		
	1 Laborer	8.00	\$30.00	\$240.00		
TOTAL		56.00		\$1,946.64	\$34.76	\$48.67
CZ	4 Carpenters	32.00	\$37.02	\$1,184.64		
	3 Laborers	24.00	\$30.00	\$720.00		
	1 Equipment operator	8.00	\$42.27	\$338.16		
	1 Laborer	8.00	\$30.00	\$240.00		
TOTAL		72.00		\$2,482.80	\$34.48	\$48.28
DD	2 Cement masons	16.00	\$35.16	\$562.56		
	1 Laborer	8.00	\$30.00	\$240.00		
TOTAL		24.00		\$802.56	\$33.44	\$47.48
DF	3 Cement masons	24.00	\$35.16	\$843.84		
	5 Laborers	40.00	\$30.00	\$1,200.00		
TOTAL		64.00		\$2,043.84	\$31.94	\$45.35
DI	1 Drywall installer	8.00	\$36.09	\$288.72	\$36.09	\$50.53
DJ	1 Drywall installer	8.00	\$36.09	\$288.72		
	1 Laborer	8.00	\$30.00	\$240.00		
TOTAL		16.00		\$528.72	\$33.05	\$46.26
DK	1 Drywall installer	8.00	\$36.09	\$288.72		
	1 Drywall taper	8.00	\$36.02	\$288.16		
TOTAL		16.00		\$576.88	\$36.06	\$50.48
DL	2 Drywall installers	16.00	\$36.09	\$577.44		
	1 Drywall taper	8.00	\$36.02	\$288.16		
TOTAL		24.00		\$865.60	\$36.07	\$50.49
DM	2 Drywall installers	16.00	\$36.09	\$577.44	\$36.09	\$50.53
DT	1 Drywall taper	8.00	\$36.02	\$288.16	\$36.02	\$50.43
DU	2 Drywall tapers	16.00	\$36.02	\$576.32	\$36.02	\$50.43
EA	1 Electrician	8.00	\$40.19	\$321.52	\$40.19	\$58.28
EB	2 Electricians	16.00	\$40.19	\$643.04	\$40.19	\$58.28
ED	1 Electrician	8.00	\$40.19	\$321.52		
	1 Carpenter	8.00	\$37.02	\$296.16		
TOTAL		16.00		\$617.68	\$38.61	\$55.98
FA	1 Floorlayer	8.00	\$33.93	\$271.44	\$33.93	\$47.50
FB	2 Floorlayers	16.00	\$33.93	\$542.88		
	1/4 Laborer	2.00	\$30.00	\$60.00		
TOTAL		18.00		\$602.88	\$33.49	\$46.89
FC	1 Floorlayer (hardwood)	8.00	\$35.62	\$284.99	\$35.62	\$50.59

Crew Code		Manhours per day	Total costs \$/Hr.	\$/Day	Average Crew Rate (ACR) per Hour	Average Crew Rate (ACROP) per Hour w/O&P
FD	2 Floorlayers (hardwood)	16.00	\$35.62	\$569.98		
	1/4 Laborer	2.00	\$30.00	\$60.00		
	TOTAL	18.00		\$629.98	\$35.00	\$49.70
GA	1 Glazier	8.00	\$35.78	\$286.24	\$35.78	\$50.81
GB	2 Glaziers	16.00	\$35.78	\$572.48	\$35.78	\$50.81
GC	3 Glaziers	24.00	\$35.78	\$858.72	\$35.78	\$50.81
HA	1 Fence erector	8.00	\$38.37	\$306.98	\$38.37	\$54.49
HB	1 Fence erector	8.00	\$38.37	\$306.98		
	1 Laborer	8.00	\$30.00	\$240.00		
	TOTAL	16.00		\$546.98	\$34.19	\$48.54
HD	2 Fence erectors	16.00	\$38.37	\$613.96		
	1 Laborer	8.00	\$30.00	\$240.00		
	TOTAL	24.00		\$853.96	\$35.58	\$50.53
1L	1 Laborer	8.00	\$30.00	\$240.00	\$30.00	\$42.00
LB	2 Laborers	16.00	\$30.00	\$480.00	\$30.00	\$42.00
LC	2 Laborers	16.00	\$30.00	\$480.00		
	1 Carpenter	8.00	\$37.02	\$296.16		
	TOTAL	24.00		\$776.16	\$32.34	\$45.28
LD	2 Laborers	16.00	\$30.00	\$480.00		
	2 Carpenters	16.00	\$37.02	\$592.32		
	TOTAL	32.00		\$1,072.32	\$33.51	\$46.91
LG	5 Laborers	40.00	\$30.00	\$1,200.00		
	1 Carpenter	8.00	\$37.02	\$296.16		
	TOTAL	48.00		\$1,496.16	\$31.17	\$43.64
LH	3 Laborers	24.00	\$30.00	\$720.00	\$30.00	\$42.00
LJ	4 Laborers	32.00	\$30.00	\$960.00	\$30.00	\$42.00
LK	2 Laborers	16.00	\$30.00	\$480.00		
	2 Carpenters	16.00	\$37.02	\$592.32		
	1 Equipment operator	8.00	\$42.27	\$338.16		
	1 Laborer	8.00	\$30.00	\$240.00		
	TOTAL	48.00		\$1,650.48	\$34.39	\$48.14
LL	3 Laborers	24.00	\$30.00	\$720.00		
	1 Carpenter	8.00	\$37.02	\$296.16		
	1 Equipment operator	8.00	\$42.27	\$338.16		
	1 Laborer	8.00	\$30.00	\$240.00		
	TOTAL	48.00		\$1,594.32	\$33.22	\$46.50
LR	1 Lather	8.00	\$35.58	\$284.64	\$35.58	\$50.52
MB	1 Millwright finish carpenter	8.00	\$34.86	\$278.88	\$34.86	\$49.50
	1 Laborer	8.00	\$30.00	\$240.00		
	TOTAL	16.00		\$518.88	\$32.43	\$46.05

Crew Code		Manhours per day	Total costs \$/Hr.	\$/Day	Average Crew Rate (ACR) per Hour	Average Crew Rate (ACROP) per Hour w/O&P
ML	2 Bricklayers	16.00	\$37.58	\$601.28		
	1 Bricktender	8.00	\$27.85	\$222.80		
	TOTAL	24.00		\$824.08	\$34.34	\$48.76
MR	1 Millwright finish carpenter	8.00	\$34.86	\$278.88	\$34.86	\$49.50
NA	1 Painter (brush)	8.00	\$37.82	\$302.56	\$37.82	\$52.95
NC	1 Painter (spray)	8.00	\$38.96	\$311.70	\$38.96	\$54.55
PD	2 Plasterers	16.00	\$37.06	\$592.96		
	1 Plasterer helper	8.00	\$29.09	\$232.72		
	TOTAL	24.00		\$825.68	\$34.40	\$48.85
PE	3 Plasterers	24.00	\$37.06	\$889.44		
	2 Plasterer helpers	16.00	\$29.09	\$465.44		
	TOTAL	40.00		\$1,354.88	\$33.87	\$48.10
QA	1 Paperhanger	8.00	\$39.71	\$317.66	\$39.71	\$57.58
2R	2 Roofers (journeyman)	16.00	\$41.27	\$660.32	\$41.27	\$60.67
RG	2 Roofers (journeyman)	16.00	\$41.27	\$660.32		
	1 Laborer	8.00	\$30.00	\$240.00		
	TOTAL	24.00		\$900.32	\$37.51	\$55.14
RJ	2 Roofers (wood shingles)	16.00	\$43.34	\$693.48	\$43.34	\$63.71
RL	2 Roofers (journeyman)	16.00	\$41.27	\$660.32		
	1/2 Laborer	4.00	\$30.00	\$120.00		
	TOTAL	20.00		\$780.32	\$39.02	\$57.35
RM	2 Roofers (wood shingles)	16.00	\$43.34	\$693.48		
	1/2 Laborer	4.00	\$30.00	\$120.00		
	TOTAL	20.00		\$813.48	\$40.67	\$59.79
RQ	2 Roofers (wood shingles)	16.00	\$43.34	\$693.48		
	7/8 Laborer	7.00	\$30.00	\$210.00		
	TOTAL	23.00		\$903.48	\$39.28	\$57.74
RS	1 Roofer (foreman)	8.00	\$45.41	\$363.24		
	3 Roofers (pitch)	24.00	\$42.52	\$1,020.56		
	2 Laborers	16.00	\$30.00	\$480.00		
	TOTAL	48.00		\$1,863.80	\$38.83	\$57.08
RT	2 Roofers (pitch)	16.00	\$42.52	\$680.38		
	1 Laborer	8.00	\$30.00	\$240.00		
	TOTAL	24.00		\$920.38	\$38.35	\$56.37
SA	1 Plumber	8.00	\$43.02	\$344.16	\$43.02	\$62.38
SB	1 Plumber	8.00	\$43.02	\$344.16		
	1 Laborer	8.00	\$30.00	\$240.00		
	TOTAL	16.00		\$584.16	\$36.51	\$52.94

Crew Code		Manhours per day	Total costs \$/Hr.	\$/Day	Average Crew Rate (ACR) per Hour	Average Crew Rate (ACROP) per Hour w/O&P
SC	1 Plumber	8.00	\$43.02	\$344.16		
	1 Electrician	8.00	\$40.19	\$321.52		
	TOTAL	16.00		\$665.68	\$41.61	\$60.33
SD	1 Plumber	8.00	\$43.02	\$344.16		
	1 Laborer	8.00	\$30.00	\$240.00		
	1 Electrician	8.00	\$40.19	\$321.52		
	TOTAL	24.00		\$905.68	\$37.74	\$54.72
SE	2 Plumbers	16.00	\$43.02	\$688.32		
	1 Laborer	8.00	\$30.00	\$240.00		
	1 Electrician	8.00	\$40.19	\$321.52		
	TOTAL	32.00		\$1,249.84	\$39.06	\$56.63
SF	2 Plumbers	16.00	\$43.02	\$688.32		
	1 Laborer	8.00	\$30.00	\$240.00		
	TOTAL	24.00		\$928.32	\$38.68	\$56.09
SG	3 Plumbers	24.00	\$43.02	\$1,032.48		
	1 Laborer	8.00	\$30.00	\$240.00		
	TOTAL	32.00		\$1,272.48	\$39.77	\$57.66
TB	1 Tile setter (ceramic)	8.00	\$35.29	\$282.32		
	1 Tile setter helper (ceramic)	8.00	\$26.76	\$214.05		
	TOTAL	16.00		\$496.37	\$31.02	\$44.05
UA	1 Sheet metal worker	8.00	\$41.72	\$333.76	\$41.72	\$59.24
UB	2 Sheet metal workers	16.00	\$41.72	\$667.52	\$41.72	\$59.24
UC	2 Sheet metal workers	16.00	\$41.72	\$667.52		
	2 Laborers	16.00	\$30.00	\$480.00		
	TOTAL	32.00		\$1,147.52	\$35.86	\$50.92
UD	1 Sheet metal worker	8.00	\$41.72	\$333.76		
	1 Laborer	8.00	\$30.00	\$240.00		
	TOTAL	16.00		\$573.76	\$35.86	\$50.92
UE	1 Sheet metal worker	8.00	\$41.72	\$333.76		
	1 Laborer	8.00	\$30.00	\$240.00		
	1/2 Electrician	4.00	\$40.19	\$160.76		
	TOTAL	20.00		\$734.52	\$36.73	\$52.15
UF	2 Sheet metal workers	16.00	\$41.72	\$667.52		
	1 Laborer	8.00	\$30.00	\$240.00		
	TOTAL	24.00		\$907.52	\$37.81	\$53.69
VB	1 Equipment operator	8.00	\$42.27	\$338.16		
	1 Laborer	8.00	\$30.00	\$240.00		
	TOTAL	16.00		\$578.16	\$36.14	\$50.59

Abbreviations Used in This Book

ABS	acrylonitrile butadiene styrene	F.H.A.	Federal Housing Administration	PSI	per square inch
ACR	average crew rate	fl. oz.	fluid ounce	PVC	polyvinyl chloride
AGA	American Gas Association	flt	flight	Qt.	quart
AMP	ampere	ft.	foot	R.E.	rounded edge
Approx.	approximately	ga.	gauge	R/L	random length
ASME	American Society of Mechanical Engineers	gal	gallon	RS	rapid start (lamps)
auto.	automatic	galv.	galvanized	R/W/L	random width and length
Avg.	average	GFI	ground fault interrupter	S4S	surfaced-four-sides
Bdle.	bundle	GPH	gallons per hour	SF	square foot
BTU	British thermal unit	GPM	gallons per minute	SL	slimline (lamps)
BTUH	British thermal unit per hour	H	height or high	Sq.	1 square or 100 square feet
C	100	HP, hp	horsepower	S.S.B.	single strength, B quality
cc	center to center or cubic centimeter	Hr.	hour	std.	standard
CF	cubic foot	HVAC	heating, ventilating, air conditioning	SY	square yard
CFM	cubic foot per minute	i.d.	inside diameter	T	thick
CLF	100 linear feet	i.e.	that is	T&G	tongue and groove
Const.	construction	Inst	install	U	thermal conductivity
Corr.	corrugated	I.P.S.	iron pipe size	U.I.	united inches
CSF	100 square feet	KD	knocked down	UL	Underwriters Laboratories
CSY	100 square yards	KW, kw	kilowatts	U.S.G.	United States Gypsum
Ctn	carton	L	length or long	VLF	vertical linear feet
CWT	100 pounds	lb, lbs.	pound(s)	W	width or wide
CY	cubic yard	LF	linear feet	yr.	year
Cu.	cubic	LS	lump sum		
d	penny	M	1000		
D	deep or depth	Mat'l	material		
Demo	demolish	Max.	maximum		
dia.	diameter	MBF	1000 board feet		
D.S.A.	double strength, A grade	MBHP	1000 boiler horsepower		
D.S.B.	double strength, B grade	Mi	miles		
Ea	each	Min.	minimum		
e.g.	for example	MSF	1000 square feet		
etc.	et cetera	O.B.	opposed blade		
exp.	exposure	oc	on center		
FAS	First and Select grade	o.d.	outside dimension		
		oz.	ounce		
		pcs.	pieces		
		pkg.	package		

Symbols

/	per
%	percent
"	inches
'	foot or feet
x	by
o	degree
#	number or pounds
\$	dollar
+/-	plus or minus

For crew abbreviations, please see Crew Compositions & Wage Rates chart, pages 15 to 19.

Acoustical and insulating tile

1. Dimensions


- Acoustical tile. $\frac{1}{2}$ " thick x 12" x 12", 24".
- Insulating tile, decorative. $\frac{1}{2}$ " thick x 12" x 12", 24"; $\frac{1}{2}$ " thick x 16" x 16", 32".

2. **Installation.** Tile may be applied to existing plaster (if joist spacing is suitable) or to wood furring strips. Tile may have a square edge or flange. Depending on the type and shape of the tile, you can use adhesive, staples, nails or clips to attach the tile.

3. **Estimating Technique.** Determine area and add 5 percent to 10 percent for waste.

4. **Notes on Material Pricing.** A material price of \$20.00 a gallon for adhesive was used to compile the Average Material Cost/Unit on the following pages. Here are the coverage rates:

12" x 12"	1.25 Gal/CSF
12" x 24"	0.95 Gal/CSF
16" x 16"	0.75 Gal/CSF
16" x 32"	0.55 Gal/CSF

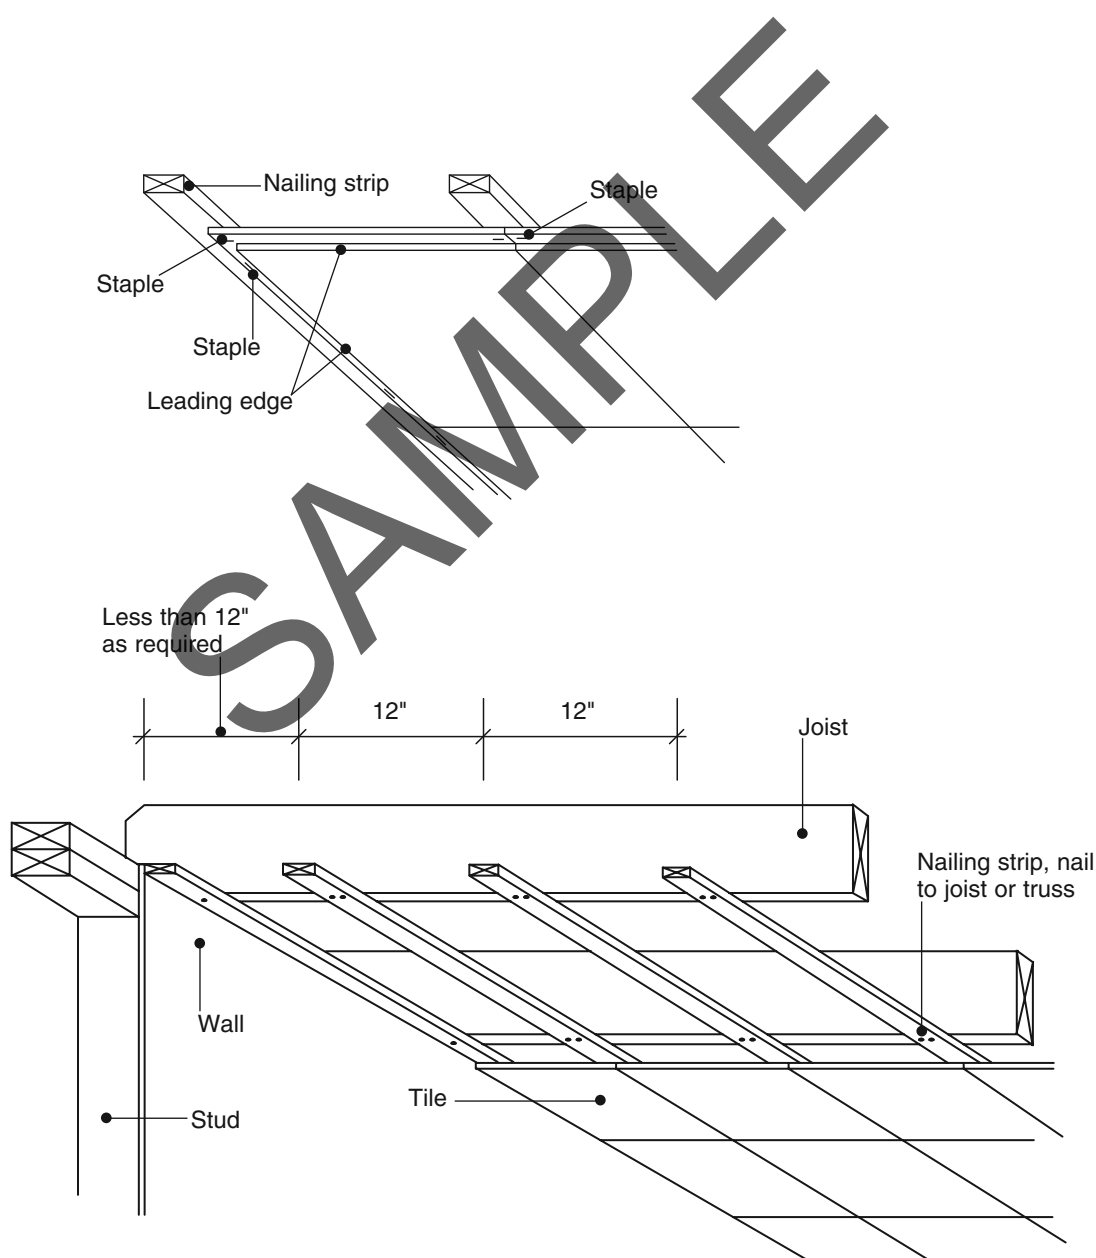

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
-------------	------	------	-----	--------------	------------------------------	------------------------------	------------------------------	------------------------------	------------------------------	------------------------------	-----------------------------

Acoustical treatment

See also *Suspended ceiling systems*, page 439

Ceiling and wall tile

Adhesive set

Tile only, no grid system

Demo	SF	Lg	LB	.012	1300	---	.36	---	.36	.50
Demo	SF	Sm	LB	.018	910.0	---	.54	---	.54	.76

Tile on furring strips

Demo	SF	Lg	LB	.009	1710	---	.27	---	.27	.38
Demo	SF	Sm	LB	.013	1197	---	.39	---	.39	.55

Mineral fiber, vinyl coated, tile only

Applied in square pattern by adhesive to solid backing; 5% tile waste

1/2" thick, 12" x 12" or 12" x 24"

Economy, mini perforated	Inst	SF	Lg	2C	.018	880.0	.95	.67	---	1.62	2.03
	Inst	SF	Sm	2C	.026	616.0	1.04	.96	---	2.00	2.54
Standard, random perforated	Inst	SF	Lg	2C	.018	880.0	1.58	.67	---	2.25	2.75
	Inst	SF	Sm	2C	.026	616.0	1.73	.96	---	2.69	3.34
Designer, swirl perforation	Inst	SF	Lg	2C	.018	880.0	2.18	.67	---	2.85	3.44
	Inst	SF	Sm	2C	.026	616.0	2.39	.96	---	3.35	4.10
Deluxe, sculptured face	Inst	SF	Lg	2C	.018	880.0	2.96	.67	---	3.63	4.34
	Inst	SF	Sm	2C	.026	616.0	3.24	.96	---	4.20	5.07

5/8" thick, 12" x 12" or 12" x 24"

Economy, mini perforated	Inst	SF	Lg	2C	.018	880.0	1.14	.67	---	1.81	2.24
	Inst	SF	Sm	2C	.026	616.0	1.25	.96	---	2.21	2.79
Standard, random perforated	Inst	SF	Lg	2C	.018	880.0	1.93	.67	---	2.60	3.15
	Inst	SF	Sm	2C	.026	616.0	2.12	.96	---	3.08	3.79
Designer, swirl perforation	Inst	SF	Lg	2C	.018	880.0	2.69	.67	---	3.36	4.03
	Inst	SF	Sm	2C	.026	616.0	2.94	.96	---	3.90	4.73
Deluxe, sculptured face	Inst	SF	Lg	2C	.018	880.0	3.66	.67	---	4.33	5.14
	Inst	SF	Sm	2C	.026	616.0	4.01	.96	---	4.97	5.96

3/4" thick, 12" x 12" or 12" x 24"

Economy, mini perforated	Inst	SF	Lg	2C	.018	880.0	1.26	.67	---	1.93	2.38
	Inst	SF	Sm	2C	.026	616.0	1.38	.96	---	2.34	2.93
Standard, random perforated	Inst	SF	Lg	2C	.018	880.0	2.14	.67	---	2.81	3.39
	Inst	SF	Sm	2C	.026	616.0	2.35	.96	---	3.31	4.05
Designer, swirl perforation	Inst	SF	Lg	2C	.018	880.0	2.99	.67	---	3.66	4.37
	Inst	SF	Sm	2C	.026	616.0	3.28	.96	---	4.24	5.12
Deluxe, sculptured face	Inst	SF	Lg	2C	.018	880.0	4.08	.67	---	4.75	5.62
	Inst	SF	Sm	2C	.026	616.0	4.47	.96	---	5.43	6.49

Applied by adhesive to furring strips ADD

Inst	SF	Lg	2C	.002	---	---	---	.07	---	.07	.10
Inst	SF	Sm	2C	.002	---	---	---	.07	---	.07	.10

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
-------------	------	------	-----	--------------	------------------------------	------------------------------	------------------------------	------------------------------	------------------------------	------------------------------	-----------------------------

Stapled

Tile only, no grid system	Demo	SF	Lg	LB	.014	1170	---	.42	---	.42	.59
	Demo	SF	Sm	LB	.020	819	---	.60	---	.60	.84
Tile on furring strips	Demo	SF	Lg	LB	.010	1540	---	.30	---	.30	.42
	Demo	SF	Sm	LB	.015	1078	---	.45	---	.45	.63

Mineral fiber, vinyl coated, tile only

Applied in square pattern by staples, nails, or clips; 5% tile waste

1/2" thick, 12" x 12" or 12" x 24"

Economy, mini perforated	Inst	SF	Lg	2C	.017	960.0	.86	.63	---	1.49	1.87
	Inst	SF	Sm	2C	.024	672.0	.94	.89	---	1.83	2.32
Standard, random perforated	Inst	SF	Lg	2C	.017	960.0	1.49	.63	---	2.12	2.59
	Inst	SF	Sm	2C	.024	672.0	1.63	.89	---	2.52	3.12
Designer, swirl perforation	Inst	SF	Lg	2C	.017	960.0	2.10	.63	---	2.73	3.30
	Inst	SF	Sm	2C	.024	672.0	2.30	.89	---	3.19	3.89
Deluxe, sculptured face	Inst	SF	Lg	2C	.017	960.0	2.88	.63	---	3.51	4.19
	Inst	SF	Sm	2C	.024	672.0	3.15	.89	---	4.04	4.87

5/8" thick, 12" x 12" or 12" x 24"

Economy, mini perforated	Inst	SF	Lg	2C	.017	960.0	1.06	.63	---	1.69	2.10
	Inst	SF	Sm	2C	.024	672.0	1.16	.89	---	2.05	2.58
Standard, random perforated	Inst	SF	Lg	2C	.017	960.0	1.85	.63	---	2.48	3.01
	Inst	SF	Sm	2C	.024	672.0	2.02	.89	---	2.91	3.57
Designer, swirl perforation	Inst	SF	Lg	2C	.017	960.0	2.60	.63	---	3.23	3.87
	Inst	SF	Sm	2C	.024	672.0	2.85	.89	---	3.74	4.52
Deluxe, sculptured face	Inst	SF	Lg	2C	.017	960.0	3.58	.63	---	4.21	5.00
	Inst	SF	Sm	2C	.024	672.0	3.92	.89	---	4.81	5.75

3/4" thick, 12" x 12" or 12" x 24"

Economy, mini perforated	Inst	SF	Lg	2C	.017	960.0	1.18	.63	---	1.81	2.24
	Inst	SF	Sm	2C	.024	672.0	1.29	.89	---	2.18	2.73
Standard, random perforated	Inst	SF	Lg	2C	.017	960.0	2.06	.63	---	2.69	3.25
	Inst	SF	Sm	2C	.024	672.0	2.25	.89	---	3.14	3.83
Designer, swirl perforation	Inst	SF	Lg	2C	.017	960.0	2.91	.63	---	3.54	4.23
	Inst	SF	Sm	2C	.024	672.0	3.19	.89	---	4.08	4.91
Deluxe, sculptured face	Inst	SF	Lg	2C	.017	960.0	4.00	.63	---	4.63	5.48
	Inst	SF	Sm	2C	.024	672.0	4.38	.89	---	5.27	6.28

Applied by staples, nails or clips to furring strips ADD

Inst	SF	Lg	2C	.017	960.0	---	.63	---	.63	.88
Inst	SF	Sm	2C	.024	672.0	---	.89	---	.89	1.24

Tile patterns, effect on labor

Herringbone, Increase manhours

	Inst	%	Lg	2C	25.0	---	---	---	---	---	---
	Inst	%	Sm	2C	25.0	---	---	---	---	---	---
Diagonal, Increase manhours	Inst	%	Lg	2C	20.0	---	---	---	---	---	---
	Inst	%	Sm	2C	20.0	---	---	---	---	---	---
Ashlar, Increase manhours											
	Inst	%	Lg	2C	30.0	---	---	---	---	---	---

Description	Oper	Unit	Vol	Crew Size	Man-hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
-------------	------	------	-----	-----------	--------------------	---------------------	---------------------	---------------------	---------------------	---------------------	--------------------

Furring strips, 8% waste included

Over wood

1" x 4", 12" oc	Inst	SF	Lg	2C	.010	1600	.29	.37	---	.66	.85
	Inst	SF	Sm	2C	.014	1120	.32	.52	---	.84	1.09
1" x 4", 16" oc	Inst	SF	Lg	2C	.008	1920	.25	.30	---	.55	.70
	Inst	SF	Sm	2C	.012	1344	.28	.44	---	.72	.94

Over plaster

1" x 4", 12" oc	Inst	SF	Lg	2C	.013	1280	.29	.48	---	.77	1.01
	Inst	SF	Sm	2C	.018	896	.32	.67	---	.99	1.30
1" x 4", 16" oc	Inst	SF	Lg	2C	.010	1600	.25	.37	---	.62	.81
	Inst	SF	Sm	2C	.014	1120	.28	.52	---	.80	1.05

Adhesives

Better quality, gun-applied in continuous bead to wood or metal framing or furring members.

Per 100 SF of surface area including 6% waste.

Panel adhesives

Subfloor adhesives, on floors

12" oc members

1/8" diameter (11 fl.oz./CSF)	Inst	CSF	Lg	CA	.075	106.0	3.92	2.78	---	6.70	8.28
	Inst	CSF	Sm	CA	.101	79.50	4.30	3.74	---	8.04	10.10
1/4" diameter (43 fl.oz./CSF)	Inst	CSF	Lg	CA	.075	106.0	15.60	2.78	---	18.38	21.40
	Inst	CSF	Sm	CA	.101	79.50	17.20	3.74	---	20.94	24.40
3/8" diameter (97 fl.oz./CSF)	Inst	CSF	Lg	CA	.075	106.0	35.30	2.78	---	38.08	43.40
	Inst	CSF	Sm	CA	.101	79.50	38.70	3.74	---	42.44	48.60
1/2" diameter (172 fl.oz./CSF)	Inst	CSF	Lg	CA	.075	106.0	62.40	2.78	---	65.18	73.80
	Inst	CSF	Sm	CA	.101	79.50	68.40	3.74	---	72.14	81.90

16" oc members

1/8" diameter (9 fl.oz./CSF)	Inst	CSF	Lg	CA	.056	143.0	3.14	2.07	---	5.21	6.42
	Inst	CSF	Sm	CA	.075	107.3	3.44	2.78	---	6.22	7.74
1/4" diameter (34 fl.oz./CSF)	Inst	CSF	Lg	CA	.056	143.0	12.50	2.07	---	14.57	16.90
	Inst	CSF	Sm	CA	.075	107.3	13.70	2.78	---	16.48	19.20
3/8" diameter (78 fl.oz./CSF)	Inst	CSF	Lg	CA	.056	143.0	28.20	2.07	---	30.27	34.50
	Inst	CSF	Sm	CA	.075	107.3	30.90	2.78	---	33.68	38.50
1/2" diameter (137 fl.oz./CSF)	Inst	CSF	Lg	CA	.056	143.0	49.90	2.07	---	51.97	58.80
	Inst	CSF	Sm	CA	.075	107.3	54.70	2.78	---	57.48	65.20

24" oc members

1/8" diameter (7 fl.oz./CSF)	Inst	CSF	Lg	CA	.052	154.0	2.35	1.93	---	4.28	5.33
	Inst	CSF	Sm	CA	.069	115.5	2.58	2.55	---	5.13	6.47
1/4" diameter (26 fl.oz./CSF)	Inst	CSF	Lg	CA	.052	154.0	9.38	1.93	---	11.31	13.20
	Inst	CSF	Sm	CA	.069	115.5	10.30	2.55	---	12.85	15.10
3/8" diameter (58 fl.oz./CSF)	Inst	CSF	Lg	CA	.052	154.0	21.20	1.93	---	23.13	26.40
	Inst	CSF	Sm	CA	.069	115.5	23.20	2.55	---	25.75	29.60
1/2" diameter (103 fl.oz./CSF)	Inst	CSF	Lg	CA	.052	154.0	37.50	1.93	---	39.43	44.60
	Inst	CSF	Sm	CA	.069	115.5	41.10	2.55	---	43.65	49.60

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
-------------	------	------	-----	--------------	------------------------------	------------------------------	------------------------------	------------------------------	------------------------------	------------------------------	-----------------------------

Wall sheathing or shear panel wall adhesive on walls, floors or ceilings**12" oc members**

1/8" diameter (11 fl.oz./CSF)	Inst	CSF	Lg	CA	.100	80.00	2.81	3.70	---	6.51	8.33
	Inst	CSF	Sm	CA	.133	60.00	3.08	4.92	---	8.00	10.30
1/4" diameter (43 fl.oz./CSF)	Inst	CSF	Lg	CA	.100	80.00	11.20	3.70	---	14.90	17.70
	Inst	CSF	Sm	CA	.133	60.00	12.20	4.92	---	17.12	20.60
3/8" diameter (97 fl.oz./CSF)	Inst	CSF	Lg	CA	.100	80.00	25.20	3.70	---	28.90	33.40
	Inst	CSF	Sm	CA	.133	60.00	27.60	4.92	---	32.52	37.80
1/2" diameter (172 fl.oz./CSF)	Inst	CSF	Lg	CA	.100	80.00	44.60	3.70	---	48.30	55.10
	Inst	CSF	Sm	CA	.133	60.00	48.90	4.92	---	53.82	61.60

16" oc members

1/8" diameter (9 fl.oz./CSF)	Inst	CSF	Lg	CA	.091	88.00	2.25	3.37	---	5.62	7.24
	Inst	CSF	Sm	CA	.121	66.00	2.46	4.48	---	6.94	9.03
1/4" diameter (34 fl.oz./CSF)	Inst	CSF	Lg	CA	.091	88.00	8.93	3.37	---	12.30	14.70
	Inst	CSF	Sm	CA	.121	66.00	9.79	4.48	---	14.27	17.20
3/8" diameter (78 fl.oz./CSF)	Inst	CSF	Lg	CA	.091	88.00	20.20	3.37	---	23.57	27.30
	Inst	CSF	Sm	CA	.121	66.00	22.10	4.48	---	26.58	31.00
1/2" diameter (137 fl.oz./CSF)	Inst	CSF	Lg	CA	.091	88.00	35.70	3.37	---	39.07	44.70
	Inst	CSF	Sm	CA	.121	66.00	39.10	4.48	---	43.58	50.10

24" oc members

1/8" diameter (7 fl.oz./CSF)	Inst	CSF	Lg	CA	.084	95.00	1.68	3.11	---	4.79	6.24
	Inst	CSF	Sm	CA	.112	71.25	1.85	4.15	---	6.00	7.88
1/4" diameter (26 fl.oz./CSF)	Inst	CSF	Lg	CA	.084	95.00	6.70	3.11	---	9.81	11.90
	Inst	CSF	Sm	CA	.112	71.25	7.34	4.15	---	11.49	14.00
3/8" diameter (58 fl.oz./CSF)	Inst	CSF	Lg	CA	.084	95.00	15.10	3.11	---	18.21	21.30
	Inst	CSF	Sm	CA	.112	71.25	16.60	4.15	---	20.75	24.40
1/2" diameter (103 fl.oz./CSF)	Inst	CSF	Lg	CA	.084	95.00	26.80	3.11	---	29.91	34.30
	Inst	CSF	Sm	CA	.112	71.25	29.30	4.15	---	33.45	38.60

Polystyrene or polyurethane foam panel adhesive, on walls**12" oc members**

1/8" diameter (11 fl.oz./CSF)	Inst	CSF	Lg	CA	.100	80.00	4.04	3.70	---	7.74	9.71
	Inst	CSF	Sm	CA	.133	60.00	4.42	4.92	---	9.34	11.80
1/4" diameter (43 fl.oz./CSF)	Inst	CSF	Lg	CA	.100	80.00	16.10	3.70	---	19.80	23.20
	Inst	CSF	Sm	CA	.133	60.00	17.60	4.92	---	22.52	26.70
3/8" diameter (97 fl.oz./CSF)	Inst	CSF	Lg	CA	.100	80.00	36.30	3.70	---	40.00	45.80
	Inst	CSF	Sm	CA	.133	60.00	39.80	4.92	---	44.72	51.40
1/2" diameter (172 fl.oz./CSF)	Inst	CSF	Lg	CA	.100	80.00	64.20	3.70	---	67.90	77.10
	Inst	CSF	Sm	CA	.133	60.00	70.40	4.92	---	75.32	85.70

16" oc members

1/8" diameter (9 fl.oz./CSF)	Inst	CSF	Lg	CA	.091	88.00	3.22	3.37	---	6.59	8.32
	Inst	CSF	Sm	CA	.121	66.00	3.53	4.48	---	8.01	10.20
1/4" diameter (34 fl.oz./CSF)	Inst	CSF	Lg	CA	.091	88.00	12.90	3.37	---	16.27	19.10
	Inst	CSF	Sm	CA	.121	66.00	14.10	4.48	---	18.58	22.10
3/8" diameter (78 fl.oz./CSF)	Inst	CSF	Lg	CA	.091	88.00	29.00	3.37	---	32.37	37.20
	Inst	CSF	Sm	CA	.121	66.00	31.80	4.48	---	36.28	41.90
1/2" diameter (137 fl.oz./CSF)	Inst	CSF	Lg	CA	.091	88.00	51.40	3.37	---	54.77	62.20
	Inst	CSF	Sm	CA	.121	66.00	56.30	4.48	---	60.78	69.30

Description	Oper	Unit	Vol	Crew Size	Man-hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
24" oc members											
1/8" diameter (7 fl.oz./CSF)	Inst	CSF	Lg	CA	.084	95.00	2.42	3.11	---	5.53	7.06
	Inst	CSF	Sm	CA	.129	62.00	2.66	4.78	---	7.44	9.67
1/4" diameter (26 fl.oz./CSF)	Inst	CSF	Lg	CA	.084	95.00	9.65	3.11	---	12.76	15.20
	Inst	CSF	Sm	CA	.129	62.00	10.60	4.78	---	15.38	18.50
3/8" diameter (58 fl.oz./CSF)	Inst	CSF	Lg	CA	.084	95.00	21.80	3.11	---	24.91	28.70
	Inst	CSF	Sm	CA	.129	62.00	23.90	4.78	---	28.68	33.40
1/2" diameter (103 fl.oz./CSF)	Inst	CSF	Lg	CA	.084	95.00	38.50	3.11	---	41.61	47.50
	Inst	CSF	Sm	CA	.129	62.00	42.20	4.78	---	46.98	54.00
Gypsum drywall adhesive, on ceilings											
12" oc members											
1/8" diameter (11 fl.oz./CSF)	Inst	CSF	Lg	CA	.100	80.00	2.46	3.70	---	6.16	7.94
	Inst	CSF	Sm	CA	.133	60.00	2.70	4.92	---	7.62	9.92
1/4" diameter (43 fl.oz./CSF)	Inst	CSF	Lg	CA	.100	80.00	9.83	3.70	---	13.53	16.20
	Inst	CSF	Sm	CA	.133	60.00	10.80	4.92	---	15.72	19.00
3/8" diameter (97 fl.oz./CSF)	Inst	CSF	Lg	CA	.100	80.00	22.20	3.70	---	25.90	30.00
	Inst	CSF	Sm	CA	.133	60.00	24.30	4.92	---	29.22	34.10
1/2" diameter (172 fl.oz./CSF)	Inst	CSF	Lg	CA	.100	80.00	39.20	3.70	---	42.90	49.10
	Inst	CSF	Sm	CA	.133	60.00	43.00	4.92	---	47.92	55.10
16" oc members											
1/8" diameter (9 fl.oz./CSF)	Inst	CSF	Lg	CA	.091	88.00	1.98	3.37	---	5.35	6.93
	Inst	CSF	Sm	CA	.121	66.00	2.17	4.48	---	6.65	8.70
1/4" diameter (34 fl.oz./CSF)	Inst	CSF	Lg	CA	.091	88.00	7.86	3.37	---	11.23	13.50
	Inst	CSF	Sm	CA	.121	66.00	8.62	4.48	---	13.10	15.90
3/8" diameter (78 fl.oz./CSF)	Inst	CSF	Lg	CA	.091	88.00	17.70	3.37	---	21.07	24.60
	Inst	CSF	Sm	CA	.121	66.00	19.40	4.48	---	23.88	28.00
1/2" diameter (137 fl.oz./CSF)	Inst	CSF	Lg	CA	.091	88.00	31.40	3.37	---	34.77	39.90
	Inst	CSF	Sm	CA	.121	66.00	34.40	4.48	---	38.88	44.80
24" oc members											
1/8" diameter (7 fl.oz./CSF)	Inst	CSF	Lg	CA	.084	95.00	1.48	3.11	---	4.59	6.01
	Inst	CSF	Sm	CA	.112	71.25	1.62	4.15	---	5.77	7.62
1/4" diameter (26 fl.oz./CSF)	Inst	CSF	Lg	CA	.084	95.00	5.90	3.11	---	9.01	11.00
	Inst	CSF	Sm	CA	.112	71.25	6.46	4.15	---	10.61	13.00
3/8" diameter (58 fl.oz./CSF)	Inst	CSF	Lg	CA	.084	95.00	13.30	3.11	---	16.41	19.30
	Inst	CSF	Sm	CA	.112	71.25	14.60	4.15	---	18.75	22.10
1/2" diameter (103 fl.oz./CSF)	Inst	CSF	Lg	CA	.084	95.00	23.50	3.11	---	26.61	30.70
	Inst	CSF	Sm	CA	.112	71.25	25.80	4.15	---	29.95	34.70

Gypsum drywall adhesive, on walls

12" oc members

1/8" diameter (11 fl.oz./CSF)	Inst	CSF	Lg	CA	.100	80.00	2.46	3.70	---	6.16	7.94
	Inst	CSF	Sm	CA	.133	60.00	2.70	4.92	---	7.62	9.92
1/4" diameter (43 fl.oz./CSF)	Inst	CSF	Lg	CA	.100	80.00	9.83	3.70	---	13.53	16.20
	Inst	CSF	Sm	CA	.133	60.00	10.80	4.92	---	15.72	19.00
3/8" diameter (97 fl.oz./CSF)	Inst	CSF	Lg	CA	.100	80.00	22.20	3.70	---	25.90	30.00
	Inst	CSF	Sm	CA	.133	60.00	24.30	4.92	---	29.22	34.10
1/2" diameter (172 fl.oz./CSF)	Inst	CSF	Lg	CA	.100	80.00	39.20	3.70	---	42.90	49.10
	Inst	CSF	Sm	CA	.133	60.00	43.00	4.92	---	47.92	55.10

Description	Oper	Unit	Vol	Crew Size	Man-hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
16" oc members											
1/8" diameter (9 fl.oz./CSF)	Inst	CSF	Lg	CA	.091	88.00	1.98	3.37	---	5.35	6.93
	Inst	CSF	Sm	CA	.121	66.00	2.17	4.48	---	6.65	8.70
1/4" diameter (34 fl.oz./CSF)	Inst	CSF	Lg	CA	.091	88.00	7.86	3.37	---	11.23	13.50
	Inst	CSF	Sm	CA	.121	66.00	8.62	4.48	---	13.10	15.90
3/8" diameter (78 fl.oz./CSF)	Inst	CSF	Lg	CA	.091	88.00	17.70	3.37	---	21.07	24.60
	Inst	CSF	Sm	CA	.121	66.00	19.40	4.48	---	23.88	28.00
1/2" diameter (137 fl.oz./CSF)	Inst	CSF	Lg	CA	.091	88.00	31.40	3.37	---	34.77	39.90
	Inst	CSF	Sm	CA	.121	66.00	34.40	4.48	---	38.88	44.80
24" oc members											
1/8" diameter (7 fl.oz./CSF)	Inst	CSF	Lg	CA	.084	95.00	1.48	3.11	---	4.59	6.01
	Inst	CSF	Sm	CA	.112	71.25	1.62	4.15	---	5.77	7.62
1/4" diameter (26 fl.oz./CSF)	Inst	CSF	Lg	CA	.084	95.00	5.90	3.11	---	9.01	11.00
	Inst	CSF	Sm	CA	.112	71.25	6.46	4.15	---	10.61	13.00
3/8" diameter (58 fl.oz./CSF)	Inst	CSF	Lg	CA	.084	95.00	13.30	3.11	---	16.41	19.30
	Inst	CSF	Sm	CA	.112	71.25	14.60	4.15	---	18.75	22.10
1/2" diameter (103 fl.oz./CSF)	Inst	CSF	Lg	CA	.084	95.00	23.50	3.11	---	26.61	30.70
	Inst	CSF	Sm	CA	.112	71.25	25.80	4.15	---	29.95	34.70
Hardboard or plastic panel adhesive, on walls											
12" oc members											
1/8" diameter (11 fl.oz./CSF)	Inst	CSF	Lg	CA	.100	80.00	4.04	3.70	---	7.74	9.71
	Inst	CSF	Sm	CA	.133	60.00	4.42	4.92	---	9.34	11.80
1/4" diameter (43 fl.oz./CSF)	Inst	CSF	Lg	CA	.100	80.00	16.10	3.70	---	19.80	23.20
	Inst	CSF	Sm	CA	.133	60.00	17.60	4.92	---	22.52	26.70
3/8" diameter (97 fl.oz./CSF)	Inst	CSF	Lg	CA	.100	80.00	36.30	3.70	---	40.00	45.80
	Inst	CSF	Sm	CA	.133	60.00	39.80	4.92	---	44.72	51.40
1/2" diameter (172 fl.oz./CSF)	Inst	CSF	Lg	CA	.100	80.00	64.20	3.70	---	67.90	77.10
	Inst	CSF	Sm	CA	.133	60.00	70.40	4.92	---	75.32	85.70
16" oc members											
1/8" diameter (9 fl.oz./CSF)	Inst	CSF	Lg	CA	.091	88.00	3.22	3.37	---	6.59	8.32
	Inst	CSF	Sm	CA	.121	66.00	3.53	4.48	---	8.01	10.20
1/4" diameter (34 fl.oz./CSF)	Inst	CSF	Lg	CA	.091	88.00	12.90	3.37	---	16.27	19.10
	Inst	CSF	Sm	CA	.121	66.00	14.10	4.48	---	18.58	22.10
3/8" diameter (78 fl.oz./CSF)	Inst	CSF	Lg	CA	.091	88.00	29.00	3.37	---	32.37	37.20
	Inst	CSF	Sm	CA	.121	66.00	31.80	4.48	---	36.28	41.90
1/2" diameter (137 fl.oz./CSF)	Inst	CSF	Lg	CA	.091	88.00	51.40	3.37	---	54.77	62.20
	Inst	CSF	Sm	CA	.121	66.00	56.30	4.48	---	60.78	69.30
24" oc members											
1/8" diameter (7 fl.oz./CSF)	Inst	CSF	Lg	CA	.084	95.00	2.42	3.11	---	5.53	7.06
	Inst	CSF	Sm	CA	.112	71.25	2.66	4.15	---	6.81	8.78
1/4" diameter (26 fl.oz./CSF)	Inst	CSF	Lg	CA	.084	95.00	9.65	3.11	---	12.76	15.20
	Inst	CSF	Sm	CA	.112	71.25	10.60	4.15	---	14.75	17.70
3/8" diameter (58 fl.oz./CSF)	Inst	CSF	Lg	CA	.084	95.00	21.80	3.11	---	24.91	28.70
	Inst	CSF	Sm	CA	.112	71.25	23.90	4.15	---	28.05	32.50
1/2" diameter (103 fl.oz./CSF)	Inst	CSF	Lg	CA	.084	95.00	38.50	3.11	---	41.61	47.50
	Inst	CSF	Sm	CA	.112	71.25	42.20	4.15	---	46.35	53.10

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
-------------	------	------	-----	--------------	------------------------------	------------------------------	------------------------------	------------------------------	------------------------------	------------------------------	-----------------------------

Air conditioning and ventilating systems

System components

Condensing units

Air cooled, compressor, standard controls

1.0 ton	Inst	Ea	Lg	SB	8.00	2.00	678.00	292.00	---	970.00	1200.00
	Inst	Ea	Sm	SB	10.0	1.60	742.00	365.00	---	1107.00	1270.00
1.5 ton	Inst	Ea	Lg	SB	9.14	1.75	832.00	334.00	---	1166.00	1440.00
	Inst	Ea	Sm	SB	11.4	1.40	911.00	416.00	---	1327.00	1510.00
2.0 ton	Inst	Ea	Lg	SB	10.7	1.50	954.00	391.00	---	1345.00	1660.00
	Inst	Ea	Sm	SB	13.3	1.20	1040.00	486.00	---	1526.00	1750.00
2.5 ton	Inst	Ea	Lg	SB	12.8	1.25	1140.00	467.00	---	1607.00	1990.00
	Inst	Ea	Sm	SB	16.0	1.00	1250.00	584.00	---	1834.00	2090.00
3.0 ton	Inst	Ea	Lg	SB	16.0	1.00	1350.00	584.00	---	1934.00	2400.00
	Inst	Ea	Sm	SB	20.0	0.80	1480.00	730.00	---	2210.00	2540.00
4.0 ton	Inst	Ea	Lg	SB	21.3	0.75	1780.00	778.00	---	2558.00	3170.00
	Inst	Ea	Sm	SB	26.7	0.60	1940.00	975.00	---	2915.00	3360.00
5.0 ton	Inst	Ea	Lg	SB	32.0	0.50	2170.00	1170.00	---	3340.00	4190.00
	Inst	Ea	Sm	SB	40.0	0.40	2380.00	1460.00	---	3840.00	4500.00
<i>Minimum Job Charge</i>											
	Inst	Job	Lg	SB	5.33	3.00	---	195.00	---	195.00	282.00
	Inst	Job	Sm	SB	6.67	2.40	---	244.00	---	244.00	353.00

Diffusers

Aluminum, opposed blade damper, unless otherwise noted

Ceiling or sidewall, linear

2" wide	Inst	LF	Lg	UA	.267	30.00	24.90	11.10	---	36.00	44.50
	Inst	LF	Sm	UA	.333	24.00	27.30	13.90	---	41.20	47.00
4" wide	Inst	LF	Lg	UA	.296	27.00	33.40	12.40	---	45.80	55.90
	Inst	LF	Sm	UA	.370	21.60	36.50	15.40	---	51.90	58.50
6" wide	Inst	LF	Lg	UA	.333	24.00	41.30	13.90	---	55.20	67.30
	Inst	LF	Sm	UA	.417	19.20	45.20	17.40	---	62.60	69.90
8" wide	Inst	LF	Lg	UA	.400	20.00	48.20	16.70	---	64.90	79.20
	Inst	LF	Sm	UA	.500	16.00	52.80	20.90	---	73.70	82.40

Perforated, 24" x 24" panel size

6" x 6"	Inst	Ea	Lg	UA	.500	16.00	67.80	20.90	---	88.70	108.00
	Inst	Ea	Sm	UA	.625	12.80	74.20	26.10	---	100.30	111.00
8" x 8"	Inst	Ea	Lg	UA	.571	14.00	70.00	23.80	---	93.80	114.00
	Inst	Ea	Sm	UA	.714	11.20	76.60	29.80	---	106.40	119.00
10" x 10"	Inst	Ea	Lg	UA	.667	12.00	71.00	27.80	---	98.80	121.00
	Inst	Ea	Sm	UA	.833	9.60	77.70	34.80	---	112.50	127.00
12" x 12"	Inst	Ea	Lg	UA	.800	10.00	73.70	33.40	---	107.10	132.00
	Inst	Ea	Sm	UA	1.00	8.00	80.60	41.70	---	122.30	140.00
18" x 18"	Inst	Ea	Lg	UA	1.00	8.00	98.10	41.70	---	139.80	172.00
	Inst	Ea	Sm	UA	1.25	6.40	107.00	52.20	---	159.20	181.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
Rectangular, one- to four-way blow											
6" x 6"	Inst	Ea	Lg	UA	.500	16.00	39.80	20.90	---	60.70	75.30
	Inst	Ea	Sm	UA	.625	12.80	43.50	26.10	---	69.60	80.50
12" x 6"	Inst	Ea	Lg	UA	.571	14.00	50.90	23.80	---	74.70	92.30
	Inst	Ea	Sm	UA	.714	11.20	55.70	29.80	---	85.50	98.00
12" x 9"	Inst	Ea	Lg	UA	.667	12.00	59.90	27.80	---	87.70	108.00
	Inst	Ea	Sm	UA	.833	9.60	65.50	34.80	---	100.30	115.00
12" x 12"	Inst	Ea	Lg	UA	.800	10.00	70.00	33.40	---	103.40	128.00
	Inst	Ea	Sm	UA	1.00	8.00	76.60	41.70	---	118.30	136.00
24" x 12"	Inst	Ea	Lg	UA	1.00	8.00	119.00	41.70	---	160.70	196.00
	Inst	Ea	Sm	UA	1.25	6.40	130.00	52.20	---	182.20	204.00
T-bar mounting, 24" x 24" lay in frame											
6" x 6"	Inst	Ea	Lg	UA	.500	16.00	64.10	20.90	---	85.00	103.00
	Inst	Ea	Sm	UA	.625	12.80	70.20	26.10	---	96.30	107.00
9" x 9"	Inst	Ea	Lg	UA	.571	14.00	71.60	23.80	---	95.40	116.00
	Inst	Ea	Sm	UA	.714	11.20	78.30	29.80	---	108.10	121.00
12" x 12"	Inst	Ea	Lg	UA	.667	12.00	93.80	27.80	---	121.60	147.00
	Inst	Ea	Sm	UA	.833	9.60	103.00	34.80	---	137.80	152.00
15" x 15"	Inst	Ea	Lg	UA	.800	10.00	97.50	33.40	---	130.90	160.00
	Inst	Ea	Sm	UA	1.00	8.00	107.00	41.70	---	148.70	166.00
18" x 18"	Inst	Ea	Lg	UA	1.00	8.00	128.00	41.70	---	169.70	207.00
	Inst	Ea	Sm	UA	1.25	6.40	140.00	52.20	---	192.20	214.00
Minimum Job Charge											
	Inst	Job	Lg	UA	2.29	3.50	---	95.50	---	95.50	136.00
	Inst	Job	Sm	UA	2.86	2.80	---	119.00	---	119.00	169.00
Ductwork											
Fabricated rectangular, includes fittings, joints, supports											
Aluminum alloy											
Under 100 lbs	Inst	Lb	Lg	UF	.343	70.00	3.71	13.00	---	16.71	22.70
	Inst	Lb	Sm	UF	.429	56.00	4.06	16.20	---	20.26	27.10
100 to 500 lbs	Inst	Lb	Lg	UF	.267	90.00	2.68	10.10	---	12.78	17.40
	Inst	Lb	Sm	UF	.333	72.00	2.93	12.60	---	15.53	20.80
500 to 1,000 lbs	Inst	Lb	Lg	UF	.218	110.0	1.93	8.24	---	10.17	13.90
	Inst	Lb	Sm	UF	.273	88.00	2.11	10.30	---	12.41	16.80
Over 1,000 lbs	Inst	Lb	Lg	UF	.185	130.0	1.43	6.99	---	8.42	11.60
	Inst	Lb	Sm	UF	.231	104.0	1.57	8.73	---	10.30	14.00
Galvanized steel											
Under 400 lbs	Inst	Lb	Lg	UF	.120	200.0	1.11	4.54	---	5.65	7.72
	Inst	Lb	Sm	UF	.150	160.0	1.22	5.67	---	6.89	9.27
400 to 1,000 lbs	Inst	Lb	Lg	UF	.112	215.0	.71	4.23	---	4.94	6.83
	Inst	Lb	Sm	UF	.140	172.0	.78	5.29	---	6.07	8.30
1,000 to 2,000 lbs	Inst	Lb	Lg	UF	.104	230.0	.53	3.93	---	4.46	6.19
	Inst	Lb	Sm	UF	.130	184.0	.58	4.92	---	5.50	7.56
2,000 to 5,000 lbs	Inst	Lb	Lg	UF	.100	240.0	.42	3.78	---	4.20	5.85
	Inst	Lb	Sm	UF	.125	192.0	.46	4.73	---	5.19	7.17
Over 10,000 lbs	Inst	Lb	Lg	UF	.096	250.0	.37	3.63	---	4.00	5.58
	Inst	Lb	Sm	UF	.120	200.0	.41	4.54	---	4.95	6.85

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
-------------	------	------	-----	--------------	------------------------------	------------------------------	------------------------------	------------------------------	------------------------------	------------------------------	-----------------------------

Flexible, coated fabric on spring steel, aluminum, or corrosion-resistant metal

Non-insulated

3" diameter	Inst	LF	Lg	UD	.058	275.0	.83	2.08	---	2.91	3.91
	Inst	LF	Sm	UD	.073	220.0	.90	2.62	---	3.52	4.62
5" diameter	Inst	LF	Lg	UD	.071	225.0	.96	2.55	---	3.51	4.72
	Inst	LF	Sm	UD	.089	180.0	1.06	3.19	---	4.25	5.59
6" diameter	Inst	LF	Lg	UD	.080	200.0	1.08	2.87	---	3.95	5.32
	Inst	LF	Sm	UD	.100	160.0	1.18	3.59	---	4.77	6.27
7" diameter	Inst	LF	Lg	UD	.091	175.0	1.42	3.26	---	4.68	6.27
	Inst	LF	Sm	UD	.114	140.0	1.55	4.09	---	5.64	7.35
8" diameter	Inst	LF	Lg	UD	.107	150.0	1.47	3.84	---	5.31	7.14
	Inst	LF	Sm	UD	.133	120.0	1.61	4.77	---	6.38	8.38
10" diameter	Inst	LF	Lg	UD	.128	125.0	1.89	4.59	---	6.48	8.69
	Inst	LF	Sm	UD	.160	100.0	2.06	5.74	---	7.80	10.20
12" diameter	Inst	LF	Lg	UD	.160	100.0	2.24	5.74	---	7.98	10.70
	Inst	LF	Sm	UD	.200	80.0	2.45	7.17	---	9.62	12.60

Insulated

3" diameter	Inst	LF	Lg	UD	.064	250.0	1.42	2.30	---	3.72	4.89
	Inst	LF	Sm	UD	.080	200.0	1.55	2.87	---	4.42	5.62
4" diameter	Inst	LF	Lg	UD	.071	225.0	1.42	2.55	---	3.97	5.25
	Inst	LF	Sm	UD	.089	180.0	1.55	3.19	---	4.74	6.08
5" diameter	Inst	LF	Lg	UD	.080	200.0	1.66	2.87	---	4.53	5.98
	Inst	LF	Sm	UD	.100	160.0	1.82	3.59	---	5.41	6.91
6" diameter	Inst	LF	Lg	UD	.091	175.0	1.83	3.26	---	5.09	6.74
	Inst	LF	Sm	UD	.114	140.0	2.01	4.09	---	6.10	7.81
7" diameter	Inst	LF	Lg	UD	.107	150.0	2.24	3.84	---	6.08	8.02
	Inst	LF	Sm	UD	.133	120.0	2.45	4.77	---	7.22	9.22
8" diameter	Inst	LF	Lg	UD	.128	125.0	2.29	4.59	---	6.88	9.15
	Inst	LF	Sm	UD	.160	100.0	2.51	5.74	---	8.25	10.70
10" diameter	Inst	LF	Lg	UD	.160	100.0	2.98	5.74	---	8.72	11.60
	Inst	LF	Sm	UD	.200	80.00	3.26	7.17	---	10.43	13.40
12" diameter	Inst	LF	Lg	UD	.213	75.00	3.47	7.64	---	11.11	14.80
	Inst	LF	Sm	UD	.267	60.00	3.79	9.57	---	13.36	17.40
14" diameter	Inst	LF	Lg	UD	.320	50.00	4.20	11.50	---	15.70	21.10
	Inst	LF	Sm	UD	.400	40.00	4.59	14.30	---	18.89	25.00

Duct accessories

Air extractors

12" x 4"	Inst	Ea	Lg	UA	.333	24.00	13.00	13.90	---	26.90	34.70
	Inst	Ea	Sm	UA	.417	19.20	14.20	17.40	---	31.60	38.90
8" x 6"	Inst	Ea	Lg	UA	.400	20.00	13.00	16.70	---	29.70	38.60
	Inst	Ea	Sm	UA	.500	16.00	14.20	20.90	---	35.10	43.80
20" x 8"	Inst	Ea	Lg	UA	.500	16.00	29.20	20.90	---	50.10	63.10
	Inst	Ea	Sm	UA	.625	12.80	31.90	26.10	---	58.00	68.90
18" x 10"	Inst	Ea	Lg	UA	.571	14.00	28.60	23.80	---	52.40	66.70
	Inst	Ea	Sm	UA	.714	11.20	31.30	29.80	---	61.10	73.60
24" x 12"	Inst	Ea	Lg	UA	.800	10.00	39.80	33.40	---	73.20	93.10
	Inst	Ea	Sm	UA	1.00	8.00	43.50	41.70	---	85.20	103.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
13-1/2" deep, 20' long	Inst	BF	Lg	CY	.035	1620	2.59	1.22	.16	3.97	4.84
	Inst	BF	Sm	CY	.049	1134	3.03	1.70	.23	4.96	6.10
13-1/2" deep, 20' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
13-1/2" deep, 20' long	Inst	SF	Lg	CY	.009	6545	.64	.31	.04	.99	1.21
	Inst	SF	Sm	CY	.012	4582	.75	.42	.06	1.23	1.51
15" deep, 20' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
15" deep, 20' long	Inst	LF	Lg	CY	.156	360.0	12.90	5.42	.72	19.04	23.20
	Inst	LF	Sm	CY	.222	252.0	15.20	7.72	1.03	23.95	29.30
15" deep, 20' long	Demo	BF	Lg	LK	.027	1800	---	.93	.14	1.07	1.44
	Demo	BF	Sm	LK	.038	1260	---	1.31	.21	1.52	2.04
15" deep, 20' long	Inst	BF	Lg	CY	.031	1800	2.58	1.08	.14	3.80	4.62
	Inst	BF	Sm	CY	.044	1260	3.03	1.53	.21	4.77	5.84
15" deep, 20' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
15" deep, 20' long	Inst	SF	Lg	CY	.009	6545	.71	.31	.04	1.06	1.29
	Inst	SF	Sm	CY	.012	4582	.83	.42	.06	1.31	1.60
16-1/2" deep, 20' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	---	4.57	6.40
	Demo	LF	Sm	LK	.190	252.0	---	6.53	---	6.53	9.15
16-1/2" deep, 20' long	Inst	LF	Lg	CY	.156	360.0	14.20	5.42	---	19.62	24.00
	Inst	LF	Sm	CY	.222	252.0	16.70	7.72	---	24.42	30.00
16-1/2" deep, 20' long	Demo	BF	Lg	LK	.024	1980	---	.83	---	.83	1.16
	Demo	BF	Sm	LK	.035	1386	---	1.20	---	1.20	1.68
16-1/2" deep, 20' long	Inst	BF	Lg	CY	.028	1980	2.59	.97	---	3.56	4.34
	Inst	BF	Sm	CY	.040	1386	3.03	1.39	---	4.42	5.43
16-1/2" deep, 20' long	Demo	SF	Lg	LK	.007	6545	---	.24	---	.24	.34
	Demo	SF	Sm	LK	.010	4582	---	.34	---	.34	.48
16-1/2" deep, 20' long	Inst	SF	Lg	CY	.009	6545	.78	.31	---	1.09	1.34
	Inst	SF	Sm	CY	.012	4582	.92	.42	---	1.34	1.64
18" deep, 20' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
18" deep, 20' long	Inst	LF	Lg	CY	.156	360.0	15.50	5.42	.72	21.64	26.20
	Inst	LF	Sm	CY	.222	252.0	18.20	7.72	1.03	26.95	32.80
18" deep, 20' long	Demo	BF	Lg	LK	.022	2160	---	.76	.12	.88	1.18
	Demo	BF	Sm	LK	.032	1512	---	1.10	.17	1.27	1.71
18" deep, 20' long	Inst	BF	Lg	CY	.026	2160	2.59	.90	.12	3.61	4.36
	Inst	BF	Sm	CY	.037	1512	3.03	1.29	.17	4.49	5.46
18" deep, 20' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
18" deep, 20' long	Inst	SF	Lg	CY	.009	6545	.85	.31	.04	1.20	1.46
	Inst	SF	Sm	CY	.012	4582	1.00	.42	.06	1.48	1.79

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
3-1/8" thick beams, SF pricing based on 16" oc (continued)											
19-1/2" deep, 30' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
19-1/2" deep, 30' long	Inst	LF	Lg	CY	.156	360.0	16.80	5.42	.72	22.94	27.70
	Inst	LF	Sm	CY	.222	252.0	19.70	7.72	1.03	28.45	34.50
19-1/2" deep, 30' long	Demo	BF	Lg	LK	.021	2340	---	.72	.11	.83	1.12
	Demo	BF	Sm	LK	.029	1638	---	1.00	.16	1.16	1.56
19-1/2" deep, 30' long	Inst	BF	Lg	CY	.024	2340	2.59	.83	.11	3.53	4.26
	Inst	BF	Sm	CY	.034	1638	3.03	1.18	.16	4.37	5.30
19-1/2" deep, 30' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
19-1/2" deep, 30' long	Inst	SF	Lg	CY	.009	6545	.93	.31	.04	1.28	1.55
	Inst	SF	Sm	CY	.012	4582	1.08	.42	.06	1.56	1.89
21" deep, 30' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
21" deep, 30' long	Inst	LF	Lg	CY	.156	360.0	18.10	5.42	.72	24.24	29.20
	Inst	LF	Sm	CY	.222	252.0	21.20	7.72	1.03	29.95	36.20
21" deep, 30' long	Demo	BF	Lg	LK	.019	2520	---	.65	.10	.75	1.01
	Demo	BF	Sm	LK	.027	1764	---	.93	.15	1.08	1.45
21" deep, 30' long	Inst	BF	Lg	CY	.022	2520	2.59	.76	.10	3.45	4.15
	Inst	BF	Sm	CY	.032	1764	3.03	1.11	.15	4.29	5.19
21" deep, 30' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
21" deep, 30' long	Inst	SF	Lg	CY	.009	6545	1.00	.31	.04	1.35	1.63
	Inst	SF	Sm	CY	.012	4582	1.17	.42	.06	1.65	1.99
22-1/2" deep, 30' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
22-1/2" deep, 30' long	Inst	LF	Lg	CY	.156	360.0	19.40	5.42	.72	25.54	30.60
	Inst	LF	Sm	CY	.222	252.0	22.70	7.72	1.03	31.45	38.00
22-1/2" deep, 30' long	Demo	BF	Lg	LK	.018	2700	---	.62	.10	.72	.97
	Demo	BF	Sm	LK	.025	1890	---	.86	.14	1.00	1.34
22-1/2" deep, 30' long	Inst	BF	Lg	CY	.021	2700	2.59	.73	.10	3.42	4.10
	Inst	BF	Sm	CY	.030	1890	3.03	1.04	.14	4.21	5.08
22-1/2" deep, 30' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
22-1/2" deep, 30' long	Inst	SF	Lg	CY	.009	6545	1.07	.31	.04	1.42	1.71
	Inst	SF	Sm	CY	.012	4582	1.25	.42	.06	1.73	2.08
24" deep, 30' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
24" deep, 30' long	Inst	LF	Lg	CY	.156	360.0	20.70	5.42	.72	26.84	32.10
	Inst	LF	Sm	CY	.222	252.0	24.20	7.72	1.03	32.95	39.70
24" deep, 30' long	Demo	BF	Lg	LK	.017	2880	---	.58	.09	.67	.91
	Demo	BF	Sm	LK	.024	2016	---	.83	.13	.96	1.29

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
24" deep, 30' long	Inst	BF	Lg	CY	.019	2880	2.59	.66	.09	3.34	3.99
	Inst	BF	Sm	CY	.028	2016	3.03	.97	.13	4.13	4.98
24" deep, 30' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
24" deep, 30' long	Inst	SF	Lg	CY	.009	6545	1.14	.31	.04	1.49	1.79
	Inst	SF	Sm	CY	.012	4582	1.33	.42	.06	1.81	2.17
25-1/2" deep, 30' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
25-1/2" deep, 30' long	Inst	LF	Lg	CY	.156	360.0	22.00	5.42	.72	28.14	33.60
	Inst	LF	Sm	CY	.222	252.0	25.80	7.72	1.03	34.55	41.50
25-1/2" deep, 30' long	Demo	BF	Lg	LK	.016	3060	---	.55	.08	.63	.85
	Demo	BF	Sm	LK	.022	2142	---	.76	.12	.88	1.18
25-1/2" deep, 30' long	Inst	BF	Lg	CY	.018	3060	2.59	.63	.08	3.30	3.93
	Inst	BF	Sm	CY	.026	2142	3.03	.90	.12	4.05	4.87
25-1/2" deep, 30' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
25-1/2" deep, 30' long	Inst	SF	Lg	CY	.009	6545	1.21	.31	.04	1.56	1.87
	Inst	SF	Sm	CY	.012	4582	1.42	.42	.06	1.90	2.28
27" deep, 30' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
27" deep, 30' long	Inst	LF	Lg	CY	.156	360.0	23.30	5.42	.72	29.44	35.10
	Inst	LF	Sm	CY	.222	252.0	27.30	7.72	1.03	36.05	43.20
27" deep, 30' long	Demo	BF	Lg	LK	.015	3240	---	.52	.08	.60	.80
	Demo	BF	Sm	LK	.021	2268	---	.72	.11	.83	1.12
27" deep, 30' long	Inst	BF	Lg	CY	.017	3240	2.59	.59	.08	3.26	3.89
	Inst	BF	Sm	CY	.025	2268	3.03	.87	.11	4.01	4.81
27" deep, 30' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
27" deep, 30' long	Inst	SF	Lg	CY	.009	6545	1.28	.31	.04	1.63	1.95
	Inst	SF	Sm	CY	.012	4582	1.50	.42	.06	1.98	2.37

5-1/8" thick, SF pricing based on 16" oc

12" deep, 20' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
12" deep, 20' long	Inst	LF	Lg	CY	.156	360.0	16.10	5.42	.72	22.24	26.90
	Inst	LF	Sm	CY	.222	252.0	18.90	7.72	1.03	27.65	33.60
12" deep, 20' long	Demo	BF	Lg	LK	.022	2160	---	.76	.12	.88	1.18
	Demo	BF	Sm	LK	.032	1512	---	1.10	.17	1.27	1.71
12" deep, 20' long	Inst	BF	Lg	CY	.026	2160	2.69	.90	.12	3.71	4.48
	Inst	BF	Sm	CY	.037	1512	3.15	1.29	.17	4.61	5.59
12" deep, 20' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
12" deep, 20' long	Inst	SF	Lg	CY	.009	6545	.89	.31	.04	1.24	1.50
	Inst	SF	Sm	CY	.012	4582	1.04	.42	.06	1.52	1.84

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
5-1/8" thick beams, SF pricing based on 16" oc (continued)											
13-1/2" deep, 20' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
13-1/2" deep, 20' long	Inst	LF	Lg	CY	.156	360.0	18.20	5.42	.72	24.34	29.20
	Inst	LF	Sm	CY	.222	252.0	21.30	7.72	1.03	30.05	36.30
13-1/2" deep, 20' long	Demo	BF	Lg	LK	.020	2430	---	.69	.11	.80	1.07
	Demo	BF	Sm	LK	.028	1701	---	.96	.15	1.11	1.50
13-1/2" deep, 20' long	Inst	BF	Lg	CY	.023	2430	2.69	.80	.11	3.60	4.32
	Inst	BF	Sm	CY	.033	1701	3.15	1.15	.15	4.45	5.38
13-1/2" deep, 20' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
13-1/2" deep, 20' long	Inst	SF	Lg	CY	.009	6545	1.00	.31	.04	1.35	1.63
	Inst	SF	Sm	CY	.012	4582	1.17	.42	.06	1.65	1.99
15" deep, 20' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
15" deep, 20' long	Inst	LF	Lg	CY	.156	360.0	20.20	5.42	.72	26.34	31.50
	Inst	LF	Sm	CY	.222	252.0	23.60	7.72	1.03	32.35	39.00
15" deep, 20' long	Demo	BF	Lg	LK	.018	2700	---	.62	.10	.72	.97
	Demo	BF	Sm	LK	.025	1890	---	.86	.14	1.00	1.34
15" deep, 20' long	Inst	BF	Lg	CY	.021	2700	2.69	.73	.10	3.52	4.22
	Inst	BF	Sm	CY	.030	1890	3.15	1.04	.14	4.33	5.22
15" deep, 20' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
15" deep, 20' long	Inst	SF	Lg	CY	.009	6545	1.11	.31	.04	1.46	1.75
	Inst	SF	Sm	CY	.012	4582	1.30	.42	.06	1.78	2.14
16-1/2" deep, 20' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
16-1/2" deep, 20' long	Inst	LF	Lg	CY	.156	360.0	22.20	5.42	.72	28.34	33.80
	Inst	LF	Sm	CY	.222	252.0	26.00	7.72	1.03	34.75	41.70
16-1/2" deep, 20' long	Demo	BF	Lg	LK	.016	2970	---	.55	.09	.64	.86
	Demo	BF	Sm	LK	.023	2079	---	.79	.13	.92	1.24
16-1/2" deep, 20' long	Inst	BF	Lg	CY	.019	2970	2.69	.66	.09	3.44	4.11
	Inst	BF	Sm	CY	.027	2079	3.15	.94	.13	4.22	5.07
16-1/2" deep, 20' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
16-1/2" deep, 20' long	Inst	SF	Lg	CY	.009	6545	1.22	.31	.04	1.57	1.88
	Inst	SF	Sm	CY	.012	4582	1.43	.42	.06	1.91	2.29
18" deep, 20' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
18" deep, 20' long	Inst	LF	Lg	CY	.156	360.0	24.20	5.42	.72	30.34	36.10
	Inst	LF	Sm	CY	.222	252.0	28.40	7.72	1.03	37.15	44.50
18" deep, 20' long	Demo	BF	Lg	LK	.015	3240	---	.52	.08	.60	.80
	Demo	BF	Sm	LK	.021	2268	---	.72	.11	.83	1.12

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
18" deep, 20' long	Inst	BF	Lg	CY	.017	3240	2.69	.59	.08	3.36	4.00
	Inst	BF	Sm	CY	.025	2268	3.15	.87	.11	4.13	4.95
18" deep, 20' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
18" deep, 20' long	Inst	SF	Lg	CY	.009	6545	1.33	.31	.04	1.68	2.01
	Inst	SF	Sm	CY	.012	4582	1.56	.42	.06	2.04	2.44
19-1/2" deep, 20' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
19-1/2" deep, 20' long	Inst	LF	Lg	CY	.156	360.0	26.20	5.42	.72	32.34	38.40
	Inst	LF	Sm	CY	.222	252.0	30.70	7.72	1.03	39.45	47.20
19-1/2" deep, 20' long	Demo	BF	Lg	LK	.014	3510	---	.48	.07	.55	.74
	Demo	BF	Sm	LK	.020	2457	---	.69	.11	.80	1.07
19-1/2" deep, 20' long	Inst	BF	Lg	CY	.016	3510	2.69	.56	.07	3.32	3.94
	Inst	BF	Sm	CY	.023	2457	3.15	.80	.11	4.06	4.85
19-1/2" deep, 20' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
19-1/2" deep, 20' long	Inst	SF	Lg	CY	.009	6545	1.44	.31	.04	1.79	2.13
	Inst	SF	Sm	CY	.012	4582	1.69	.42	.06	2.17	2.59
21" deep, 30' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
21" deep, 30' long	Inst	LF	Lg	CY	.156	360.0	28.20	5.42	.72	34.34	40.80
	Inst	LF	Sm	CY	.222	252.0	33.10	7.72	1.03	41.85	49.90
21" deep, 30' long	Demo	BF	Lg	LK	.013	3780	---	.45	.07	.52	.70
	Demo	BF	Sm	LK	.018	2646	---	.62	.10	.72	.97
21" deep, 30' long	Inst	BF	Lg	CY	.015	3780	2.69	.52	.07	3.28	3.89
	Inst	BF	Sm	CY	.021	2646	3.15	.73	.10	3.98	4.74
21" deep, 30' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
21" deep, 30' long	Inst	SF	Lg	CY	.009	6545	1.55	.31	.04	1.90	2.26
	Inst	SF	Sm	CY	.012	4582	1.82	.42	.06	2.30	2.74
22-1/2" deep, 30' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
22-1/2" deep, 30' long	Inst	LF	Lg	CY	.156	360.0	30.20	5.42	.72	36.34	43.10
	Inst	LF	Sm	CY	.222	252.0	35.50	7.72	1.03	44.25	52.60
22-1/2" deep, 30' long	Demo	BF	Lg	LK	.012	4050	---	.41	.06	.47	.64
	Demo	BF	Sm	LK	.017	2835	---	.58	.09	.67	.91
22-1/2" deep, 30' long	Inst	BF	Lg	CY	.014	4050	2.69	.49	.06	3.24	3.83
	Inst	BF	Sm	CY	.020	2835	3.15	.70	.09	3.94	4.69
22-1/2" deep, 30' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
22-1/2" deep, 30' long	Inst	SF	Lg	CY	.009	6545	1.66	.31	.04	2.01	2.39
	Inst	SF	Sm	CY	.012	4582	1.95	.42	.06	2.43	2.89

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
5-1/8" thick beams, SF pricing based on 16" oc (continued)											
24" deep, 30' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
24" deep, 30' long	Inst	LF	Lg	CY	.156	360.0	32.20	5.42	.72	38.34	45.40
	Inst	LF	Sm	CY	.222	252.0	37.80	7.72	1.03	46.55	55.40
24" deep, 30' long	Demo	BF	Lg	LK	.011	4320	---	.38	.06	.44	.59
	Demo	BF	Sm	LK	.016	3024	---	.55	.09	.64	.86
24" deep, 30' long	Inst	BF	Lg	CY	.013	4320	2.69	.45	.06	3.20	3.79
	Inst	BF	Sm	CY	.019	3024	3.15	.66	.09	3.90	4.64
24" deep, 30' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
24" deep, 30' long	Inst	SF	Lg	CY	.009	6545	1.77	.31	.04	2.12	2.51
	Inst	SF	Sm	CY	.012	4582	2.08	.42	.06	2.56	3.04
25-1/2" deep, 30' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
25-1/2" deep, 30' long	Inst	LF	Lg	CY	.156	360.0	34.30	5.42	.72	40.44	47.70
	Inst	LF	Sm	CY	.222	252.0	40.20	7.72	1.03	48.95	58.10
25-1/2" deep, 30' long	Demo	BF	Lg	LK	.010	4590	---	.34	.06	.40	.54
	Demo	BF	Sm	LK	.015	3213	---	.52	.08	.60	.80
25-1/2" deep, 30' long	Inst	BF	Lg	CY	.012	4590	2.69	.42	.06	3.17	3.74
	Inst	BF	Sm	CY	.017	3213	3.15	.59	.08	3.82	4.53
25-1/2" deep, 30' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
25-1/2" deep, 30' long	Inst	SF	Lg	CY	.009	6545	1.89	.31	.04	2.24	2.65
	Inst	SF	Sm	CY	.012	4582	2.21	.42	.06	2.69	3.19
27" deep, 40' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
27" deep, 40' long	Inst	LF	Lg	CY	.156	360.0	36.30	5.42	.72	42.44	50.00
	Inst	LF	Sm	CY	.222	252.0	42.60	7.72	1.03	51.35	60.80
27" deep, 40' long	Demo	BF	Lg	LK	.010	4860	---	.34	.05	.39	.53
	Demo	BF	Sm	LK	.014	3402	---	.48	.08	.56	.75
27" deep, 40' long	Inst	BF	Lg	CY	.012	4860	2.69	.42	.05	3.16	3.73
	Inst	BF	Sm	CY	.016	3402	3.15	.56	.08	3.79	4.48
27" deep, 40' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
27" deep, 40' long	Inst	SF	Lg	CY	.009	6545	2.00	.31	.04	2.35	2.78
	Inst	SF	Sm	CY	.012	4582	2.34	.42	.06	2.82	3.34
28-1/2" deep, 40' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
28-1/2" deep, 40' long	Inst	LF	Lg	CY	.156	360.0	38.30	5.42	.72	44.44	52.40
	Inst	LF	Sm	CY	.222	252.0	44.90	7.72	1.03	53.65	63.50
28-1/2" deep, 40' long	Demo	BF	Lg	LK	.009	5130	---	.31	.05	.36	.48
	Demo	BF	Sm	LK	.013	3591	---	.45	.07	.52	.70
28-1/2" deep, 40' long	Inst	BF	Lg	CY	.011	5130	2.69	.38	.05	3.12	3.68
	Inst	BF	Sm	CY	.016	3591	3.15	.56	.07	3.78	4.47

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
28-1/2" deep, 40' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
28-1/2" deep, 40' long	Inst	SF	Lg	CY	.009	6545	2.11	.31	.04	2.46	2.90
	Inst	SF	Sm	CY	.012	4582	2.47	.42	.06	2.95	3.48
30" deep, 40' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
30" deep, 40' long	Inst	LF	Lg	CY	.156	360.0	40.30	5.42	.72	46.44	54.70
	Inst	LF	Sm	CY	.222	252.0	47.30	7.72	1.03	56.05	66.20
30" deep, 40' long	Demo	BF	Lg	LK	.009	5400	---	.31	.05	.36	.48
	Demo	BF	Sm	LK	.013	3780	---	.45	.07	.52	.70
30" deep, 40' long	Inst	BF	Lg	CY	.010	5400	2.69	.35	.05	3.09	3.63
	Inst	BF	Sm	CY	.015	3780	3.15	.52	.07	3.74	4.42
30" deep, 40' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
30" deep, 40' long	Inst	SF	Lg	CY	.009	6545	2.22	.31	.04	2.57	3.03
	Inst	SF	Sm	CY	.012	4582	2.60	.42	.06	3.08	3.63
31-1/2" deep, 40' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
31-1/2" deep, 40' long	Inst	LF	Lg	CY	.156	360.0	42.30	5.42	.72	48.44	57.00
	Inst	LF	Sm	CY	.222	252.0	49.60	7.72	1.03	58.35	68.90
31-1/2" deep, 40' long	Demo	BF	Lg	LK	.008	5670	---	.28	.05	.33	.44
	Demo	BF	Sm	LK	.012	3969	---	.41	.07	.48	.65
31-1/2" deep, 40' long	Inst	BF	Lg	CY	.010	5670	2.69	.35	.05	3.09	3.63
	Inst	BF	Sm	CY	.014	3969	3.15	.49	.07	3.71	4.37
31-1/2" deep, 40' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
31-1/2" deep, 40' long	Inst	SF	Lg	CY	.009	6545	2.33	.31	.04	2.68	3.16
	Inst	SF	Sm	CY	.012	4582	2.73	.42	.06	3.21	3.78
33" deep, 40' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
33" deep, 40' long	Inst	LF	Lg	CY	.156	360.0	44.40	5.42	.72	50.54	59.30
	Inst	LF	Sm	CY	.222	252.0	52.00	7.72	1.03	60.75	71.60
33" deep, 40' long	Demo	BF	Lg	LK	.008	5940	---	.28	.04	.32	.43
	Demo	BF	Sm	LK	.012	4158	---	.41	.06	.47	.64
33" deep, 40' long	Inst	BF	Lg	CY	.009	5940	2.69	.31	.04	3.04	3.57
	Inst	BF	Sm	CY	.013	4158	3.15	.45	.06	3.66	4.32
33" deep, 40' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
33" deep, 40' long	Inst	SF	Lg	CY	.009	6545	2.44	.31	.04	2.79	3.28
	Inst	SF	Sm	CY	.012	4582	2.86	.42	.06	3.34	3.93
34-1/2" deep, 40' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
34-1/2" deep, 40' long	Inst	LF	Lg	CY	.156	360.0	46.40	5.42	.72	52.54	61.60
	Inst	LF	Sm	CY	.222	252.0	54.40	7.72	1.03	63.15	74.40
34-1/2" deep, 40' long	Demo	BF	Lg	LK	.008	6210	---	.28	.04	.32	.43
	Demo	BF	Sm	LK	.011	4347	---	.38	.06	.44	.59

Description	Oper	Unit	Vol	Crew Size	Man-hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
34-1/2" deep, 40' long	Inst	BF	Lg	CY	.009	6210	2.69	.31	.04	3.04	3.57
	Inst	BF	Sm	CY	.013	4347	3.15	.45	.06	3.66	4.32
34-1/2" deep, 40' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
34-1/2" deep, 40' long	Inst	SF	Lg	CY	.009	6545	2.55	.31	.04	2.90	3.41
	Inst	SF	Sm	CY	.012	4582	2.99	.42	.06	3.47	4.08
36" deep, 50' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
36" deep, 50' long	Inst	LF	Lg	CY	.156	360.0	48.40	5.42	.72	54.54	64.00
	Inst	LF	Sm	CY	.222	252.0	56.70	7.72	1.03	65.45	77.10
36" deep, 50' long	Demo	BF	Lg	LK	.007	6480	---	.24	.04	.28	.38
	Demo	BF	Sm	LK	.011	4536	---	.38	.06	.44	.59
36" deep, 50' long	Inst	BF	Lg	CY	.009	6480	2.69	.31	.04	3.04	3.57
	Inst	BF	Sm	CY	.012	4536	3.15	.42	.06	3.63	4.27
36" deep, 50' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
36" deep, 50' long	Inst	SF	Lg	CY	.009	6545	2.66	.31	.04	3.01	3.54
	Inst	SF	Sm	CY	.012	4582	3.12	.42	.06	3.60	4.23
37-1/2" deep, 50' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
37-1/2" deep, 50' long	Inst	LF	Lg	CY	.156	360.0	50.40	5.42	.72	56.54	66.30
	Inst	LF	Sm	CY	.222	252.0	59.10	7.72	1.03	67.85	79.80
37-1/2" deep, 50' long	Demo	BF	Lg	LK	.007	6750	---	.24	.04	.28	.38
	Demo	BF	Sm	LK	.010	4725	---	.34	.06	.40	.54
37-1/2" deep, 50' long	Inst	BF	Lg	CY	.008	6750	2.69	.28	.04	3.01	3.52
	Inst	BF	Sm	CY	.012	4725	3.15	.42	.06	3.63	4.27
37-1/2" deep, 50' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
37-1/2" deep, 50' long	Inst	SF	Lg	CY	.009	6545	2.77	.31	.04	3.12	3.66
	Inst	SF	Sm	CY	.012	4582	3.25	.42	.06	3.73	4.38
39" deep, 50' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
39" deep, 50' long	Inst	LF	Lg	CY	.156	360.0	52.40	5.42	.72	58.54	68.60
	Inst	LF	Sm	CY	.222	252.0	61.50	7.72	1.03	70.25	82.50
39" deep, 50' long	Demo	BF	Lg	LK	.007	7020	---	.24	.04	.28	.38
	Demo	BF	Sm	LK	.010	4914	---	.34	.05	.39	.53
39" deep, 50' long	Inst	BF	Lg	CY	.008	7020	2.69	.28	.04	3.01	3.52
	Inst	BF	Sm	CY	.011	4914	3.15	.38	.05	3.58	4.21
39" deep, 50' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
39" deep, 50' long	Inst	SF	Lg	CY	.009	6545	2.88	.31	.04	3.23	3.79
	Inst	SF	Sm	CY	.012	4582	3.38	.42	.06	3.86	4.53

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
6-3/4" thick, SF pricing based on 16" oc											
30" deep, 30' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
30" deep, 30' long	Inst	LF	Lg	CY	.156	360.0	53.40	5.42	.72	59.54	69.80
	Inst	LF	Sm	CY	.222	252.0	62.70	7.72	1.03	71.45	84.00
30" deep, 30' long	Demo	BF	Lg	LK	.007	7200	---	.24	.04	.28	.38
	Demo	BF	Sm	LK	.010	5040	---	.34	.05	.39	.53
30" deep, 30' long	Inst	BF	Lg	CY	.008	7200	2.67	.28	.04	2.99	3.50
	Inst	BF	Sm	CY	.011	5040	3.14	.38	.05	3.57	4.20
30" deep, 30' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
30" deep, 30' long	Inst	SF	Lg	CY	.009	6545	2.94	.31	.04	3.29	3.86
	Inst	SF	Sm	CY	.012	4582	3.45	.42	.06	3.93	4.61
31-1/2" deep, 30' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
31-1/2" deep, 30' long	Inst	LF	Lg	CY	.156	360.0	56.10	5.42	.72	62.24	72.80
	Inst	LF	Sm	CY	.222	252.0	65.80	7.72	1.03	74.55	87.60
31-1/2" deep, 30' long	Demo	BF	Lg	LK	.006	7560	---	.21	.03	.24	.32
	Demo	BF	Sm	LK	.009	5292	---	.31	.05	.36	.48
31-1/2" deep, 30' long	Inst	BF	Lg	CY	.007	7560	2.67	.24	.03	2.94	3.44
	Inst	BF	Sm	CY	.011	5292	3.14	.38	.05	3.57	4.20
31-1/2" deep, 30' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
31-1/2" deep, 30' long	Inst	SF	Lg	CY	.009	6545	3.08	.31	.04	3.43	4.02
	Inst	SF	Sm	CY	.012	4582	3.62	.42	.06	4.10	4.81
33" deep, 30' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
33" deep, 30' long	Inst	LF	Lg	CY	.156	360.0	58.80	5.42	.72	64.94	75.90
	Inst	LF	Sm	CY	.222	252.0	69.00	7.72	1.03	77.75	91.10
33" deep, 30' long	Demo	BF	Lg	LK	.006	7920	---	.21	.03	.24	.32
	Demo	BF	Sm	LK	.009	5544	---	.31	.05	.36	.48
33" deep, 30' long	Inst	BF	Lg	CY	.007	7920	2.67	.24	.03	2.94	3.44
	Inst	BF	Sm	CY	.010	5544	3.13	.35	.05	3.53	4.14
33" deep, 30' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
33" deep, 30' long	Inst	SF	Lg	CY	.009	6545	3.23	.31	.04	3.58	4.19
	Inst	SF	Sm	CY	.012	4582	3.79	.42	.06	4.27	5.00
34-1/2" deep, 40' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
34-1/2" deep, 40' long	Inst	LF	Lg	CY	.156	360.0	61.40	5.42	.72	67.54	79.00
	Inst	LF	Sm	CY	.222	252.0	72.10	7.72	1.03	80.85	94.80
34-1/2" deep, 40' long	Demo	BF	Lg	LK	.006	8280	---	.21	.03	.24	.32
	Demo	BF	Sm	LK	.008	5796	---	.28	.04	.32	.43

Description	Oper	Unit	Vol	Crew Size	Man-hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
34-1/2" deep, 40' long	Inst	BF	Lg	CY	.007	8280	2.67	.24	.03	2.94	3.44
	Inst	BF	Sm	CY	.010	5796	3.14	.35	.04	3.53	4.14
34-1/2" deep, 40' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
34-1/2" deep, 40' long	Inst	SF	Lg	CY	.009	6545	3.38	.31	.04	3.73	4.37
	Inst	SF	Sm	CY	.012	4582	3.97	.42	.06	4.45	5.21
36" deep, 40' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
36" deep, 40' long	Inst	LF	Lg	CY	.156	360.0	64.10	5.42	.72	70.24	82.10
	Inst	LF	Sm	CY	.222	252.0	75.20	7.72	1.03	83.95	98.40
36" deep, 40' long	Demo	BF	Lg	LK	.006	8640	---	.21	.03	.24	.32
	Demo	BF	Sm	LK	.008	6048	---	.28	.04	.32	.43
36" deep, 40' long	Inst	BF	Lg	CY	.006	8640	2.67	.21	.03	2.91	3.39
	Inst	BF	Sm	CY	.009	6048	3.14	.31	.04	3.49	4.09
36" deep, 40' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
36" deep, 40' long	Inst	SF	Lg	CY	.009	6545	3.53	.31	.04	3.88	4.54
	Inst	SF	Sm	CY	.012	4582	4.14	.42	.06	4.62	5.41
37-1/2" deep, 40' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
37-1/2" deep, 40' long	Inst	LF	Lg	CY	.156	360.0	66.80	5.42	.72	72.94	85.10
	Inst	LF	Sm	CY	.222	252.0	78.40	7.72	1.03	87.15	102.00
37-1/2" deep, 40' long	Demo	BF	Lg	LK	.005	9000	---	.17	.03	.20	.27
	Demo	BF	Sm	LK	.008	6300	---	.28	.04	.32	.43
37-1/2" deep, 40' long	Inst	BF	Lg	CY	.006	9000	2.67	.21	.03	2.91	3.39
	Inst	BF	Sm	CY	.009	6300	3.14	.31	.04	3.49	4.09
37-1/2" deep, 40' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
37-1/2" deep, 40' long	Inst	SF	Lg	CY	.009	6545	3.67	.31	.04	4.02	4.70
	Inst	SF	Sm	CY	.012	4582	4.31	.42	.06	4.79	5.60
39" deep, 50' long	Demo	LF	Lg	LK	.133	360.0	---	4.57	.72	5.29	7.12
	Demo	LF	Sm	LK	.190	252.0	---	6.53	1.03	7.56	10.20
39" deep, 50' long	Inst	LF	Lg	CY	.156	360.0	69.40	5.42	.72	75.54	88.20
	Inst	LF	Sm	CY	.222	252.0	81.50	7.72	1.03	90.25	106.00
39" deep, 50' long	Demo	BF	Lg	LK	.005	9360	---	.17	.03	.20	.27
	Demo	BF	Sm	LK	.007	6552	---	.24	.04	.28	.38
39" deep, 50' long	Inst	BF	Lg	CY	.006	9360	2.67	.21	.03	2.91	3.39
	Inst	BF	Sm	CY	.009	6552	3.14	.31	.04	3.49	4.09
39" deep, 50' long	Demo	SF	Lg	LK	.007	6545	---	.24	.04	.28	.38
	Demo	SF	Sm	LK	.010	4582	---	.34	.06	.40	.54
39" deep, 50' long	Inst	SF	Lg	CY	.009	6545	3.82	.31	.04	4.17	4.87
	Inst	SF	Sm	CY	.012	4582	4.48	.42	.06	4.96	5.80

Description	Oper	Unit	Vol	Crew Size	Man-hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
4'-0" x 3'-0" H	Inst	Set	Lg	CA	1.27	6.30	204.00	47.00	---	251.00	300.00
	Inst	Set	Sm	CA	1.95	4.10	218.00	72.20	---	290.20	351.00
4'-0" x 3'-6" H	Inst	Set	Lg	CA	1.51	5.30	221.00	55.90	---	276.90	332.00
	Inst	Set	Sm	CA	2.32	3.45	235.00	85.90	---	320.90	391.00
4'-0" x 4'-0" H	Inst	Set	Lg	CJ	2.86	5.60	236.00	95.80	---	331.80	405.00
	Inst	Set	Sm	CJ	4.40	3.64	251.00	147.00	---	398.00	495.00
4'-0" x 4'-6" H	Inst	Set	Lg	CJ	2.86	5.60	263.00	95.80	---	358.80	436.00
	Inst	Set	Sm	CJ	4.40	3.64	280.00	147.00	---	427.00	528.00
4'-0" x 5'-0" H	Inst	Set	Lg	CJ	3.20	5.00	285.00	107.00	---	392.00	478.00
	Inst	Set	Sm	CJ	4.92	3.25	304.00	165.00	---	469.00	580.00
For bronze finish ADD	Inst	%	Lg	---	---	---	12.0	---	---	12.0	---
	Inst	%	Sm	---	---	---	12.0	---	---	12.0	---

Horizontal slide, satin anodized finish, includes screen and hardware

1 sliding lite, 1 fixed lite

Single glazed

2'-0" x 2'-0" H	Inst	Set	Lg	CA	1.23	6.50	66.00	45.50	---	111.50	140.00
	Inst	Set	Sm	CA	1.89	4.23	70.40	70.00	---	140.40	179.00
2'-0" x 3'-0" H	Inst	Set	Lg	CA	1.23	6.50	79.50	45.50	---	125.00	155.00
	Inst	Set	Sm	CA	1.89	4.23	84.80	70.00	---	154.80	195.00
2'-6" x 3'-0" H	Inst	Set	Lg	CA	1.23	6.50	85.50	45.50	---	131.00	162.00
	Inst	Set	Sm	CA	1.89	4.23	91.20	70.00	---	161.20	203.00
3'-0" x 1'-0" H	Inst	Set	Lg	CA	1.23	6.50	61.50	45.50	---	107.00	134.00
	Inst	Set	Sm	CA	1.89	4.23	65.60	70.00	---	135.60	173.00
3'-0" x 1'-6" H	Inst	Set	Lg	CA	1.23	6.50	69.00	45.50	---	114.50	143.00
	Inst	Set	Sm	CA	1.89	4.23	73.60	70.00	---	143.60	183.00
3'-0" x 2'-0" H	Inst	Set	Lg	CA	1.23	6.50	78.00	45.50	---	123.50	153.00
	Inst	Set	Sm	CA	1.89	4.23	83.20	70.00	---	153.20	194.00
3'-0" x 2'-6" H	Inst	Set	Lg	CA	1.23	6.50	85.50	45.50	---	131.00	162.00
	Inst	Set	Sm	CA	1.89	4.23	91.20	70.00	---	161.20	203.00
3'-0" x 3'-0" H	Inst	Set	Lg	CA	1.23	6.50	93.00	45.50	---	138.50	171.00
	Inst	Set	Sm	CA	1.89	4.23	99.20	70.00	---	169.20	212.00
3'-0" x 3'-6" H	Inst	Set	Lg	CA	1.45	5.50	101.00	53.70	---	154.70	191.00
	Inst	Set	Sm	CA	2.23	3.58	107.00	82.60	---	189.60	239.00
3'-0" x 4'-0" H	Inst	Set	Lg	CA	1.78	4.50	108.00	65.90	---	173.90	216.00
	Inst	Set	Sm	CA	2.73	2.93	115.00	101.00	---	216.00	274.00
3'-0" x 5'-0" H	Inst	Set	Lg	CJ	4.10	3.90	125.00	137.00	---	262.00	336.00
	Inst	Set	Sm	CJ	6.30	2.54	133.00	211.00	---	344.00	448.00
3'-6" x 2'-0" H	Inst	Set	Lg	CA	1.23	6.50	82.50	45.50	---	128.00	159.00
	Inst	Set	Sm	CA	1.89	4.23	88.00	70.00	---	158.00	199.00
3'-6" x 2'-6" H	Inst	Set	Lg	CA	1.23	6.50	91.50	45.50	---	137.00	169.00
	Inst	Set	Sm	CA	1.89	4.23	97.60	70.00	---	167.60	210.00
3'-6" x 3'-0" H	Inst	Set	Lg	CA	1.45	5.50	99.00	53.70	---	152.70	189.00
	Inst	Set	Sm	CA	2.23	3.58	106.00	82.60	---	188.60	237.00
3'-6" x 3'-6" H	Inst	Set	Lg	CA	1.45	5.50	108.00	53.70	---	161.70	199.00
	Inst	Set	Sm	CA	2.23	3.58	115.00	82.60	---	197.60	248.00
3'-6" x 4'-0" H	Inst	Set	Lg	CA	1.78	4.50	116.00	65.90	---	181.90	225.00
	Inst	Set	Sm	CA	2.73	2.93	123.00	101.00	---	224.00	283.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
4'-0" x 1'-0" H	Inst	Set	Lg	CA	1.45	5.50	70.50	53.70	---	124.20	156.00
	Inst	Set	Sm	CA	2.23	3.58	75.20	82.60	---	157.80	202.00
4'-0" x 1'-6" H	Inst	Set	Lg	CA	1.45	5.50	78.00	53.70	---	131.70	165.00
	Inst	Set	Sm	CA	2.23	3.58	83.20	82.60	---	165.80	211.00
4'-0" x 2'-0" H	Inst	Set	Lg	CA	1.78	4.50	88.50	65.90	---	154.40	194.00
	Inst	Set	Sm	CA	2.73	2.93	94.40	101.00	---	195.40	250.00
4'-0" x 2'-6" H	Inst	Set	Lg	CA	1.78	4.50	97.50	65.90	---	163.40	204.00
	Inst	Set	Sm	CA	2.73	2.93	104.00	101.00	---	205.00	261.00
4'-0" x 3'-0" H	Inst	Set	Lg	CA	1.78	4.50	107.00	65.90	---	172.90	215.00
	Inst	Set	Sm	CA	2.73	2.93	114.00	101.00	---	215.00	272.00
4'-0" x 3'-6" H	Inst	Set	Lg	CA	1.90	4.20	116.00	70.30	---	186.30	231.00
	Inst	Set	Sm	CA	2.93	2.73	123.00	108.00	---	231.00	294.00
4'-0" x 4'-0" H	Inst	Set	Lg	CA	1.90	4.20	125.00	70.30	---	195.30	242.00
	Inst	Set	Sm	CA	2.93	2.73	133.00	108.00	---	241.00	305.00
4'-0" x 5'-0" H	Inst	Set	Lg	CJ	4.57	3.50	143.00	153.00	---	296.00	378.00
	Inst	Set	Sm	CJ	7.02	2.28	152.00	235.00	---	387.00	504.00
5'-0" x 2'-0" H	Inst	Set	Lg	CJ	3.81	4.20	99.00	128.00	---	227.00	293.00
	Inst	Set	Sm	CJ	5.86	2.73	106.00	196.00	---	302.00	396.00
5'-0" x 2'-6" H	Inst	Set	Lg	CJ	3.81	4.20	110.00	128.00	---	238.00	305.00
	Inst	Set	Sm	CJ	5.86	2.73	117.00	196.00	---	313.00	409.00
5'-0" x 3'-0" H	Inst	Set	Lg	CJ	4.10	3.90	119.00	137.00	---	256.00	329.00
	Inst	Set	Sm	CJ	6.30	2.54	126.00	211.00	---	337.00	441.00
5'-0" x 3'-6" H	Inst	Set	Lg	CJ	4.10	3.90	129.00	137.00	---	266.00	341.00
	Inst	Set	Sm	CJ	6.30	2.54	138.00	211.00	---	349.00	454.00
5'-0" x 4'-0" H	Inst	Set	Lg	CJ	4.57	3.50	140.00	153.00	---	293.00	375.00
	Inst	Set	Sm	CJ	7.02	2.28	149.00	235.00	---	384.00	500.00
5'-0" x 5'-0" H	Inst	Set	Lg	CJ	4.57	3.50	168.00	153.00	---	321.00	408.00
	Inst	Set	Sm	CJ	7.02	2.28	179.00	235.00	---	414.00	535.00
6'-0" x 2'-0" H	Inst	Set	Lg	CJ	3.90	4.10	110.00	131.00	---	241.00	309.00
	Inst	Set	Sm	CJ	5.99	2.67	117.00	201.00	---	318.00	415.00
6'-0" x 2'-6" H	Inst	Set	Lg	CJ	3.90	4.10	120.00	131.00	---	251.00	321.00
	Inst	Set	Sm	CJ	5.99	2.67	128.00	201.00	---	329.00	428.00
6'-0" x 3'-0" H	Inst	Set	Lg	CJ	4.10	3.90	132.00	137.00	---	269.00	344.00
	Inst	Set	Sm	CJ	6.30	2.54	141.00	211.00	---	352.00	457.00
8'-0" x 2'-0" H	Inst	Set	Lg	CJ	4.10	3.90	137.00	137.00	---	274.00	349.00
	Inst	Set	Sm	CJ	6.30	2.54	146.00	211.00	---	357.00	463.00
8'-0" x 2'-6" H	Inst	Set	Lg	CJ	4.10	3.90	152.00	137.00	---	289.00	367.00
	Inst	Set	Sm	CJ	6.30	2.54	162.00	211.00	---	373.00	481.00
8'-0" x 3'-0" H	Inst	Set	Lg	CJ	4.57	3.50	167.00	153.00	---	320.00	406.00
	Inst	Set	Sm	CJ	7.02	2.28	178.00	235.00	---	413.00	534.00
8'-0" x 4'-0" H	Inst	Set	Lg	CJ	5.00	3.20	210.00	168.00	---	378.00	476.00
	Inst	Set	Sm	CJ	7.69	2.08	224.00	258.00	---	482.00	618.00
8'-0" x 5'-0" H	Inst	Set	Lg	CJ	5.33	3.00	254.00	179.00	---	433.00	542.00
	Inst	Set	Sm	CJ	8.21	1.95	270.00	275.00	---	545.00	696.00
For bronze finish, ADD	Inst	%	Lg	---	---	---	20.0	---	---	20.0	---
	Inst	%	Sm	---	---	---	20.0	---	---	20.0	---

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
Dual glazed											
2'-0" x 2'-0" H	Inst	Set	Lg	CA	1.27	6.30	107.00	47.00	---	154.00	188.00
	Inst	Set	Sm	CA	1.95	4.10	114.00	72.20	---	186.20	232.00
2'-0" x 2'-6" H	Inst	Set	Lg	CA	1.27	6.30	117.00	47.00	---	164.00	200.00
	Inst	Set	Sm	CA	1.95	4.10	125.00	72.20	---	197.20	245.00
2'-0" x 3'-0" H	Inst	Set	Lg	CA	1.27	6.30	128.00	47.00	---	175.00	212.00
	Inst	Set	Sm	CA	1.95	4.10	136.00	72.20	---	208.20	257.00
2'-0" x 3'-6" H	Inst	Set	Lg	CA	1.27	6.30	138.00	47.00	---	185.00	225.00
	Inst	Set	Sm	CA	1.95	4.10	147.00	72.20	---	219.20	270.00
2'-0" x 4'-0" H	Inst	Set	Lg	CA	1.27	6.30	149.00	47.00	---	196.00	237.00
	Inst	Set	Sm	CA	1.95	4.10	158.00	72.20	---	230.20	283.00
2'-6" x 2'-0" H	Inst	Set	Lg	CA	1.27	6.30	114.00	47.00	---	161.00	197.00
	Inst	Set	Sm	CA	1.95	4.10	122.00	72.20	---	194.20	241.00
2'-6" x 2'-6" H	Inst	Set	Lg	CA	1.27	6.30	128.00	47.00	---	175.00	212.00
	Inst	Set	Sm	CA	1.95	4.10	136.00	72.20	---	208.20	257.00
2'-6" x 3'-0" H	Inst	Set	Lg	CA	1.31	6.10	138.00	48.50	---	186.50	227.00
	Inst	Set	Sm	CA	2.02	3.97	147.00	74.80	---	221.80	274.00
2'-6" x 3'-6" H	Inst	Set	Lg	CA	1.31	6.10	150.00	48.50	---	198.50	240.00
	Inst	Set	Sm	CA	2.02	3.97	160.00	74.80	---	234.80	289.00
2'-6" x 4'-0" H	Inst	Set	Lg	CA	1.38	5.80	162.00	51.10	---	213.10	258.00
	Inst	Set	Sm	CA	2.12	3.77	173.00	78.50	---	251.50	309.00
3'-0" x 2'-0" H	Inst	Set	Lg	CA	1.27	6.30	123.00	47.00	---	170.00	207.00
	Inst	Set	Sm	CA	1.95	4.10	131.00	72.20	---	203.20	252.00
3'-0" x 2'-6" H	Inst	Set	Lg	CA	1.27	6.30	137.00	47.00	---	184.00	223.00
	Inst	Set	Sm	CA	1.95	4.10	146.00	72.20	---	218.20	269.00
3'-0" x 3'-0" H	Inst	Set	Lg	CA	1.27	6.30	149.00	47.00	---	196.00	237.00
	Inst	Set	Sm	CA	1.95	4.10	158.00	72.20	---	230.20	283.00
3'-0" x 3'-6" H	Inst	Set	Lg	CA	1.51	5.30	162.00	55.90	---	217.90	265.00
	Inst	Set	Sm	CA	2.32	3.45	173.00	85.90	---	258.90	319.00
3'-0" x 4'-0" H	Inst	Set	Lg	CA	1.86	4.30	176.00	68.90	---	244.90	298.00
	Inst	Set	Sm	CA	2.86	2.80	187.00	106.00	---	293.00	364.00
3'-0" x 5'-0" H	Inst	Set	Lg	CA	2.16	3.70	203.00	80.00	---	283.00	345.00
	Inst	Set	Sm	CA	3.32	2.41	216.00	123.00	---	339.00	420.00
3'-6" x 2'-0" H	Inst	Set	Lg	CA	1.27	6.30	132.00	47.00	---	179.00	218.00
	Inst	Set	Sm	CA	1.95	4.10	141.00	72.20	---	213.20	263.00
3'-6" x 2'-6" H	Inst	Set	Lg	CA	1.27	6.30	146.00	47.00	---	193.00	233.00
	Inst	Set	Sm	CA	1.95	4.10	155.00	72.20	---	227.20	280.00
3'-6" x 3'-0" H	Inst	Set	Lg	CA	1.51	5.30	161.00	55.90	---	216.90	263.00
	Inst	Set	Sm	CA	2.32	3.45	171.00	85.90	---	256.90	317.00
3'-6" x 3'-6" H	Inst	Set	Lg	CA	1.51	5.30	174.00	55.90	---	229.90	278.00
	Inst	Set	Sm	CA	2.32	3.45	186.00	85.90	---	271.90	334.00
3'-6" x 4'-0" H	Inst	Set	Lg	CA	1.86	4.30	189.00	68.90	---	257.90	314.00
	Inst	Set	Sm	CA	2.86	2.80	202.00	106.00	---	308.00	380.00
3'-6" x 5'-0" H	Inst	Set	Lg	CA	1.86	4.30	221.00	68.90	---	289.90	350.00
	Inst	Set	Sm	CA	2.86	2.80	235.00	106.00	---	341.00	419.00
4'-0" x 2'-0" H	Inst	Set	Lg	CA	1.86	4.30	140.00	68.90	---	208.90	257.00
	Inst	Set	Sm	CA	2.86	2.80	149.00	106.00	---	255.00	319.00
4'-0" x 2'-6" H	Inst	Set	Lg	CA	1.86	4.30	156.00	68.90	---	224.90	276.00
	Inst	Set	Sm	CA	2.86	2.80	166.00	106.00	---	272.00	340.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
4'-0" x 3'-0" H	Inst	Set	Lg	CA	1.86	4.30	171.00	68.90	---	239.90	293.00
	Inst	Set	Sm	CA	2.86	2.80	182.00	106.00	---	288.00	358.00
4'-0" x 3'-6" H	Inst	Set	Lg	CA	2.00	4.00	186.00	74.00	---	260.00	318.00
	Inst	Set	Sm	CA	3.08	2.60	198.00	114.00	---	312.00	388.00
4'-0" x 4'-0" H	Inst	Set	Lg	CA	2.00	4.00	203.00	74.00	---	277.00	337.00
	Inst	Set	Sm	CA	3.08	2.60	216.00	114.00	---	330.00	408.00
4'-0" x 5'-0" H	Inst	Set	Lg	CA	2.42	3.30	236.00	89.60	---	325.60	396.00
	Inst	Set	Sm	CA	3.72	2.15	251.00	138.00	---	389.00	482.00
5'-0" x 2'-0" H	Inst	Set	Lg	CA	2.00	4.00	158.00	74.00	---	232.00	285.00
	Inst	Set	Sm	CA	3.08	2.60	168.00	114.00	---	282.00	353.00
5'-0" x 2'-6" H	Inst	Set	Lg	CA	2.00	4.00	176.00	74.00	---	250.00	305.00
	Inst	Set	Sm	CA	3.08	2.60	187.00	114.00	---	301.00	375.00
5'-0" x 3'-0" H	Inst	Set	Lg	CJ	4.32	3.70	194.00	145.00	---	339.00	425.00
	Inst	Set	Sm	CJ	6.64	2.41	206.00	223.00	---	429.00	549.00
5'-0" x 3'-6" H	Inst	Set	Lg	CJ	4.32	3.70	212.00	145.00	---	357.00	446.00
	Inst	Set	Sm	CJ	6.64	2.41	226.00	223.00	---	449.00	571.00
5'-0" x 4'-0" H	Inst	Set	Lg	CJ	4.85	3.30	230.00	163.00	---	393.00	491.00
	Inst	Set	Sm	CJ	7.44	2.15	245.00	249.00	---	494.00	631.00
5'-0" x 5'-0" H	Inst	Set	Lg	CJ	4.85	3.30	287.00	163.00	---	450.00	557.00
	Inst	Set	Sm	CJ	7.44	2.15	306.00	249.00	---	555.00	700.00
6'-0" x 2'-0" H	Inst	Set	Lg	CJ	4.10	3.90	174.00	137.00	---	311.00	392.00
	Inst	Set	Sm	CJ	6.30	2.54	186.00	211.00	---	397.00	509.00
6'-0" x 2'-6" H	Inst	Set	Lg	CJ	4.10	3.90	195.00	137.00	---	332.00	417.00
	Inst	Set	Sm	CJ	6.30	2.54	208.00	211.00	---	419.00	535.00
6'-0" x 3'-0" H	Inst	Set	Lg	CJ	4.32	3.70	215.00	145.00	---	360.00	449.00
	Inst	Set	Sm	CJ	6.64	2.41	229.00	223.00	---	452.00	575.00
6'-0" x 3'-6" H	Inst	Set	Lg	CJ	4.85	3.30	233.00	163.00	---	396.00	495.00
	Inst	Set	Sm	CJ	7.44	2.15	248.00	249.00	---	497.00	634.00
6'-0" x 4'-0" H	Inst	Set	Lg	CJ	4.85	3.30	257.00	163.00	---	420.00	522.00
	Inst	Set	Sm	CJ	7.44	2.15	274.00	249.00	---	523.00	664.00
6'-0" x 5'-0" H	Inst	Set	Lg	CJ	4.85	3.30	324.00	163.00	---	487.00	600.00
	Inst	Set	Sm	CJ	7.44	2.15	346.00	249.00	---	595.00	746.00
For bronze finish, ADD	Inst	%	Lg	---	---	---	15.0	---	---	15.0	---
	Inst	%	Sm	---	---	---	15.0	---	---	15.0	---

2 sliding lites, 1 fixed lite

Single glazed

6'-0" x 2'-0" H	Inst	Set	Lg	CJ	4.32	3.70	138.00	145.00	---	283.00	361.00
	Inst	Set	Sm	CJ	6.64	2.41	147.00	223.00	---	370.00	481.00
6'-0" x 2'-6" H	Inst	Set	Lg	CJ	4.32	3.70	152.00	145.00	---	297.00	377.00
	Inst	Set	Sm	CJ	6.64	2.41	162.00	223.00	---	385.00	497.00
6'-0" x 3'-0" H	Inst	Set	Lg	CJ	4.57	3.50	165.00	153.00	---	318.00	404.00
	Inst	Set	Sm	CJ	7.02	2.28	176.00	235.00	---	411.00	532.00
6'-0" x 4'-0" H	Inst	Set	Lg	CJ	4.57	3.50	197.00	153.00	---	350.00	440.00
	Inst	Set	Sm	CJ	7.02	2.28	210.00	235.00	---	445.00	570.00
6'-0" x 5'-0" H	Inst	Set	Lg	CJ	4.57	3.50	228.00	153.00	---	381.00	477.00
	Inst	Set	Sm	CJ	7.02	2.28	243.00	235.00	---	478.00	609.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
7'-0" x 2'-0" H	Inst	Set	Lg	CJ	4.32	3.70	146.00	145.00	---	291.00	370.00
	Inst	Set	Sm	CJ	6.64	2.41	155.00	223.00	---	378.00	490.00
7'-0" x 2'-6" H	Inst	Set	Lg	CJ	4.32	3.70	162.00	145.00	---	307.00	389.00
	Inst	Set	Sm	CJ	6.64	2.41	173.00	223.00	---	396.00	510.00
7'-0" x 3'-0" H	Inst	Set	Lg	CJ	4.57	3.50	179.00	153.00	---	332.00	420.00
	Inst	Set	Sm	CJ	7.02	2.28	190.00	235.00	---	425.00	548.00
7'-0" x 4'-0" H	Inst	Set	Lg	CJ	4.57	3.50	227.00	153.00	---	380.00	475.00
	Inst	Set	Sm	CJ	7.02	2.28	242.00	235.00	---	477.00	607.00
7'-0" x 5'-0" H	Inst	Set	Lg	CJ	5.71	2.80	287.00	191.00	---	478.00	597.00
	Inst	Set	Sm	CJ	8.79	1.82	306.00	295.00	---	601.00	764.00
8'-0" x 2'-0" H	Inst	Set	Lg	CJ	4.57	3.50	161.00	153.00	---	314.00	399.00
	Inst	Set	Sm	CJ	7.02	2.28	171.00	235.00	---	406.00	526.00
8'-0" x 2'-6" H	Inst	Set	Lg	CJ	4.57	3.50	177.00	153.00	---	330.00	418.00
	Inst	Set	Sm	CJ	7.02	2.28	189.00	235.00	---	424.00	546.00
8'-0" x 3'-0" H	Inst	Set	Lg	CJ	4.57	3.50	197.00	153.00	---	350.00	440.00
	Inst	Set	Sm	CJ	7.02	2.28	210.00	235.00	---	445.00	570.00
8'-0" x 3'-6" H	Inst	Set	Lg	CJ	4.57	3.50	213.00	153.00	---	366.00	459.00
	Inst	Set	Sm	CJ	7.02	2.28	227.00	235.00	---	462.00	591.00
8'-0" x 4'-0" H	Inst	Set	Lg	CJ	5.71	2.80	231.00	191.00	---	422.00	534.00
	Inst	Set	Sm	CJ	8.79	1.82	246.00	295.00	---	541.00	696.00
8'-0" x 5'-0" H	Inst	Set	Lg	CJ	5.71	2.80	290.00	191.00	---	481.00	601.00
	Inst	Set	Sm	CJ	8.79	1.82	309.00	295.00	---	604.00	767.00
10'-0" x 2'-0" H	Inst	Set	Lg	CJ	4.57	3.50	207.00	153.00	---	360.00	452.00
	Inst	Set	Sm	CJ	7.02	2.28	221.00	235.00	---	456.00	583.00
10'-0" x 3'-0" H	Inst	Set	Lg	CJ	4.57	3.50	237.00	153.00	---	390.00	487.00
	Inst	Set	Sm	CJ	7.02	2.28	253.00	235.00	---	488.00	620.00
10'-0" x 3'-6" H	Inst	Set	Lg	CJ	5.71	2.80	272.00	191.00	---	463.00	580.00
	Inst	Set	Sm	CJ	8.79	1.82	290.00	295.00	---	585.00	745.00
10'-0" x 4'-0" H	Inst	Set	Lg	CJ	5.71	2.80	285.00	191.00	---	476.00	596.00
	Inst	Set	Sm	CJ	8.79	1.82	304.00	295.00	---	599.00	762.00
10'-0" x 5'-0" H	Inst	Set	Lg	CJ	5.71	2.80	401.00	191.00	---	592.00	728.00
	Inst	Set	Sm	CJ	8.79	1.82	427.00	295.00	---	722.00	904.00
For bronze finish, ADD	Inst	%	Lg	---	---	---	13.5	---	---	13.5	---
	Inst	%	Sm	---	---	---	13.5	---	---	13.5	---

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
Dual glazed											
6'-0" x 2'-0" H	Inst	Set	Lg	CJ	4.57	3.50	216.00	153.00	---	369.00	463.00
	Inst	Set	Sm	CJ	7.02	2.28	230.00	235.00	---	465.00	594.00
6'-0" x 2'-6" H	Inst	Set	Lg	CJ	4.57	3.50	240.00	153.00	---	393.00	490.00
	Inst	Set	Sm	CJ	7.02	2.28	256.00	235.00	---	491.00	624.00
6'-0" x 3'-0" H	Inst	Set	Lg	CJ	4.85	3.30	264.00	163.00	---	427.00	531.00
	Inst	Set	Sm	CJ	7.44	2.15	282.00	249.00	---	531.00	673.00
6'-0" x 3'-6" H	Inst	Set	Lg	CJ	4.85	3.30	288.00	163.00	---	451.00	559.00
	Inst	Set	Sm	CJ	7.44	2.15	307.00	249.00	---	556.00	702.00
6'-0" x 4'-0" H	Inst	Set	Lg	CJ	4.85	3.30	326.00	163.00	---	489.00	602.00
	Inst	Set	Sm	CJ	7.44	2.15	347.00	249.00	---	596.00	748.00
6'-0" x 5'-0" H	Inst	Set	Lg	CJ	4.85	3.30	377.00	163.00	---	540.00	660.00
	Inst	Set	Sm	CJ	7.44	2.15	402.00	249.00	---	651.00	811.00
7'-0" x 2'-0" H	Inst	Set	Lg	CJ	4.32	3.70	239.00	145.00	---	384.00	477.00
	Inst	Set	Sm	CJ	6.64	2.41	254.00	223.00	---	477.00	604.00
7'-0" x 2'-6" H	Inst	Set	Lg	CJ	4.32	3.70	263.00	145.00	---	408.00	505.00
	Inst	Set	Sm	CJ	6.64	2.41	280.00	223.00	---	503.00	633.00
7'-0" x 3'-0" H	Inst	Set	Lg	CJ	4.57	3.50	290.00	153.00	---	443.00	547.00
	Inst	Set	Sm	CJ	7.02	2.28	309.00	235.00	---	544.00	684.00
7'-0" x 3'-6" H	Inst	Set	Lg	CJ	4.85	3.30	332.00	163.00	---	495.00	609.00
	Inst	Set	Sm	CJ	7.44	2.15	354.00	249.00	---	603.00	756.00
7'-0" x 4'-0" H	Inst	Set	Lg	CJ	4.85	3.30	362.00	163.00	---	525.00	643.00
	Inst	Set	Sm	CJ	7.44	2.15	386.00	249.00	---	635.00	792.00
7'-0" x 5'-0" H	Inst	Set	Lg	CJ	6.15	2.60	444.00	206.00	---	650.00	799.00
	Inst	Set	Sm	CJ	9.47	1.69	474.00	317.00	---	791.00	989.00
8'-0" x 2'-0" H	Inst	Set	Lg	CJ	4.85	3.30	252.00	163.00	---	415.00	517.00
	Inst	Set	Sm	CJ	7.44	2.15	269.00	249.00	---	518.00	658.00
8'-0" x 2'-6" H	Inst	Set	Lg	CJ	4.85	3.30	281.00	163.00	---	444.00	550.00
	Inst	Set	Sm	CJ	7.44	2.15	299.00	249.00	---	548.00	693.00
8'-0" x 3'-0" H	Inst	Set	Lg	CJ	4.85	3.30	324.00	163.00	---	487.00	600.00
	Inst	Set	Sm	CJ	7.44	2.15	346.00	249.00	---	595.00	746.00
8'-0" x 3'-6" H	Inst	Set	Lg	CJ	4.85	3.30	353.00	163.00	---	516.00	633.00
	Inst	Set	Sm	CJ	7.44	2.15	376.00	249.00	---	625.00	781.00
8'-0" x 4'-0" H	Inst	Set	Lg	CJ	6.15	2.60	383.00	206.00	---	589.00	728.00
	Inst	Set	Sm	CJ	9.47	1.69	408.00	317.00	---	725.00	913.00
8'-0" x 5'-0" H	Inst	Set	Lg	CJ	6.15	2.60	455.00	206.00	---	661.00	811.00
	Inst	Set	Sm	CJ	9.47	1.69	485.00	317.00	---	802.00	1000.00
10'-0" x 2'-0" H	Inst	Set	Lg	CJ	4.57	3.50	354.00	153.00	---	507.00	621.00
	Inst	Set	Sm	CJ	7.02	2.28	378.00	235.00	---	613.00	764.00
10'-0" x 3'-0" H	Inst	Set	Lg	CJ	4.57	3.50	435.00	153.00	---	588.00	715.00
	Inst	Set	Sm	CJ	7.02	2.28	464.00	235.00	---	699.00	863.00
10'-0" x 3'-6" H	Inst	Set	Lg	CJ	5.71	2.80	495.00	191.00	---	686.00	837.00
	Inst	Set	Sm	CJ	8.79	1.82	528.00	295.00	---	823.00	1020.00
10'-0" x 4'-0" H	Inst	Set	Lg	CJ	5.71	2.80	536.00	191.00	---	727.00	884.00
	Inst	Set	Sm	CJ	8.79	1.82	571.00	295.00	---	866.00	1070.00
10'-0" x 5'-0" H	Inst	Set	Lg	CJ	5.71	2.80	650.00	191.00	---	841.00	1010.00
	Inst	Set	Sm	CJ	8.79	1.82	693.00	295.00	---	988.00	1210.00
For bronze finish, ADD	Inst	%	Lg	---	---	---	15.0	---	---	15.0	---
	Inst	%	Sm	---	---	---	15.0	---	---	15.0	---

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
-------------	------	------	-----	--------------	------------------------------	------------------------------	------------------------------	------------------------------	------------------------------	------------------------------	-----------------------------

Wood

**Awning windows; pine frames, exterior treated and primed, interior natural finish;
glazed 1/2" T insulating glass; unit includes weatherstripping and exterior trim**

Unit is one ventilating lite wide

20", 24" x 32" W

High quality workmanship	Inst	Set	Lg	CA	1.25	6.40	345.00	46.30	---	391.30	462.00
	Inst	Set	Sm	CA	1.92	4.16	368.00	71.10	---	439.10	523.00
Good quality workmanship	Inst	Set	Lg	CA	1.00	8.00	308.00	37.00	---	345.00	405.00
	Inst	Set	Sm	CA	1.54	5.20	328.00	57.00	---	385.00	457.00
Average quality workmanship	Inst	Set	Lg	CA	.833	9.60	255.00	30.80	---	285.80	336.00
	Inst	Set	Sm	CA	1.28	6.24	272.00	47.40	---	319.40	379.00

32", 36" x 32" W

High quality workmanship	Inst	Set	Lg	CA	1.25	6.40	458.00	46.30	---	504.30	591.00
	Inst	Set	Sm	CA	1.92	4.16	488.00	71.10	---	559.10	661.00
Good quality workmanship	Inst	Set	Lg	CA	1.00	8.00	405.00	37.00	---	442.00	518.00
	Inst	Set	Sm	CA	1.54	5.20	432.00	57.00	---	489.00	577.00
Average quality workmanship	Inst	Set	Lg	CA	.833	9.60	338.00	30.80	---	368.80	431.00
	Inst	Set	Sm	CA	1.28	6.24	360.00	47.40	---	407.40	480.00

20", 24" x 40" W

High quality workmanship	Inst	Set	Lg	CA	1.25	6.40	375.00	46.30	---	421.30	496.00
	Inst	Set	Sm	CA	1.92	4.16	400.00	71.10	---	471.10	560.00
Good quality workmanship	Inst	Set	Lg	CA	1.00	8.00	360.00	37.00	---	397.00	466.00
	Inst	Set	Sm	CA	1.54	5.20	384.00	57.00	---	441.00	521.00
Average quality workmanship	Inst	Set	Lg	CA	.833	9.60	300.00	30.80	---	330.80	388.00
	Inst	Set	Sm	CA	1.28	6.24	320.00	47.40	---	367.40	434.00

32", 36" x 40" W

High quality workmanship	Inst	Set	Lg	CA	1.25	6.40	473.00	46.30	---	519.30	608.00
	Inst	Set	Sm	CA	1.92	4.16	504.00	71.10	---	575.10	679.00
Good quality workmanship	Inst	Set	Lg	CA	1.00	8.00	398.00	37.00	---	435.00	509.00
	Inst	Set	Sm	CA	1.54	5.20	424.00	57.00	---	481.00	567.00
Average quality workmanship	Inst	Set	Lg	CA	.833	9.60	330.00	30.80	---	360.80	423.00
	Inst	Set	Sm	CA	1.28	6.24	352.00	47.40	---	399.40	471.00

20", 24" x 48" W

High quality workmanship	Inst	Set	Lg	CA	1.25	6.40	473.00	46.30	---	519.30	608.00
	Inst	Set	Sm	CA	1.92	4.16	504.00	71.10	---	575.10	679.00
Good quality workmanship	Inst	Set	Lg	CA	1.00	8.00	390.00	37.00	---	427.00	500.00
	Inst	Set	Sm	CA	1.54	5.20	416.00	57.00	---	473.00	558.00
Average quality workmanship	Inst	Set	Lg	CA	.833	9.60	324.00	30.80	---	354.80	416.00
	Inst	Set	Sm	CA	1.28	6.24	346.00	47.40	---	393.40	464.00

32", 36" x 48" W

High quality workmanship	Inst	Set	Lg	CA	1.25	6.40	713.00	46.30	---	759.30	884.00
	Inst	Set	Sm	CA	1.92	4.16	760.00	71.10	---	831.10	974.00
Good quality workmanship	Inst	Set	Lg	CA	1.00	8.00	443.00	37.00	---	480.00	561.00
	Inst	Set	Sm	CA	1.54	5.20	472.00	57.00	---	529.00	623.00
Average quality workmanship	Inst	Set	Lg	CA	.833	9.60	368.00	30.80	---	398.80	466.00
	Inst	Set	Sm	CA	1.28	6.24	392.00	47.40	---	439.40	517.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
Unit is two ventilating lites wide											
20", 24" x 48" W											
High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	585.00	112.00	---	697.00	829.00
	Inst	Set	Sm	CJ	5.13	3.12	624.00	172.00	---	796.00	958.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	540.00	89.50	---	629.50	746.00
	Inst	Set	Sm	CJ	4.10	3.90	576.00	137.00	---	713.00	855.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	450.00	74.40	---	524.40	622.00
	Inst	Set	Sm	CJ	3.42	4.68	480.00	115.00	---	595.00	712.00
32", 36" x 48" W											
High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	645.00	112.00	---	757.00	898.00
	Inst	Set	Sm	CJ	5.13	3.12	688.00	172.00	---	860.00	1030.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	615.00	89.50	---	704.50	833.00
	Inst	Set	Sm	CJ	4.10	3.90	656.00	137.00	---	793.00	947.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	512.00	74.40	---	586.40	692.00
	Inst	Set	Sm	CJ	3.42	4.68	546.00	115.00	---	661.00	788.00
20", 24" x 72" W											
High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	638.00	112.00	---	750.00	889.00
	Inst	Set	Sm	CJ	5.13	3.12	680.00	172.00	---	852.00	1020.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	600.00	89.50	---	689.50	815.00
	Inst	Set	Sm	CJ	4.10	3.90	640.00	137.00	---	777.00	928.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	500.00	74.40	---	574.40	679.00
	Inst	Set	Sm	CJ	3.42	4.68	533.00	115.00	---	648.00	773.00
32", 36" x 72" W											
High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	750.00	112.00	---	862.00	1020.00
	Inst	Set	Sm	CJ	5.13	3.12	800.00	172.00	---	972.00	1160.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	713.00	89.50	---	802.50	945.00
	Inst	Set	Sm	CJ	4.10	3.90	760.00	137.00	---	897.00	1070.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	593.00	74.40	---	667.40	786.00
	Inst	Set	Sm	CJ	3.42	4.68	632.00	115.00	---	747.00	887.00
20", 24" x 80" W											
High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	690.00	112.00	---	802.00	950.00
	Inst	Set	Sm	CJ	5.13	3.12	736.00	172.00	---	908.00	1090.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	650.00	89.50	---	739.50	872.00
	Inst	Set	Sm	CJ	4.10	3.90	693.00	137.00	---	830.00	989.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	542.00	74.40	---	616.40	727.00
	Inst	Set	Sm	CJ	3.42	4.68	578.00	115.00	---	693.00	825.00
32", 36" x 80" W											
High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	795.00	112.00	---	907.00	1070.00
	Inst	Set	Sm	CJ	5.13	3.12	848.00	172.00	---	1020.00	1220.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	750.00	89.50	---	839.50	988.00
	Inst	Set	Sm	CJ	4.10	3.90	800.00	137.00	---	937.00	1110.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	624.00	74.40	---	698.40	822.00
	Inst	Set	Sm	CJ	3.42	4.68	666.00	115.00	---	781.00	926.00

Description	Oper	Unit	Vol	Crew Size	Man-hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
20", 24" x 96" W											
High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	750.00	112.00	---	862.00	1020.00
	Inst	Set	Sm	CJ	5.13	3.12	800.00	172.00	---	972.00	1160.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	705.00	89.50	---	794.50	936.00
	Inst	Set	Sm	CJ	4.10	3.90	752.00	137.00	---	889.00	1060.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	590.00	74.40	---	664.40	782.00
	Inst	Set	Sm	CJ	3.42	4.68	629.00	115.00	---	744.00	884.00
32", 36" x 96" W											
High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	885.00	112.00	---	997.00	1170.00
	Inst	Set	Sm	CJ	5.13	3.12	944.00	172.00	---	1116.00	1330.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	833.00	89.50	---	922.50	1080.00
	Inst	Set	Sm	CJ	4.10	3.90	888.00	137.00	---	1025.00	1210.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	695.00	74.40	---	769.40	903.00
	Inst	Set	Sm	CJ	3.42	4.68	741.00	115.00	---	856.00	1010.00
Unit is three ventilating lites wide											
20", 24" x 72" W											
High quality workmanship	Inst	Set	Lg	CJ	4.44	3.60	885.00	149.00	---	1034.00	1230.00
	Inst	Set	Sm	CJ	6.84	2.34	944.00	229.00	---	1173.00	1410.00
Good quality workmanship	Inst	Set	Lg	CJ	3.56	4.50	825.00	119.00	---	944.00	1120.00
	Inst	Set	Sm	CJ	5.46	2.93	880.00	183.00	---	1063.00	1270.00
Average quality workmanship	Inst	Set	Lg	CJ	2.96	5.40	687.00	99.20	---	786.20	929.00
	Inst	Set	Sm	CJ	4.56	3.51	733.00	153.00	---	886.00	1060.00
32", 36" x 72" W											
High quality workmanship	Inst	Set	Lg	CJ	4.44	3.60	975.00	149.00	---	1124.00	1330.00
	Inst	Set	Sm	CJ	6.84	2.34	1040.00	229.00	---	1269.00	1520.00
Good quality workmanship	Inst	Set	Lg	CJ	3.56	4.50	915.00	119.00	---	1034.00	1220.00
	Inst	Set	Sm	CJ	5.46	2.93	976.00	183.00	---	1159.00	1380.00
Average quality workmanship	Inst	Set	Lg	CJ	2.96	5.40	765.00	99.20	---	864.20	1020.00
	Inst	Set	Sm	CJ	4.56	3.51	816.00	153.00	---	969.00	1150.00
20", 24" x 108" W											
High quality workmanship	Inst	Set	Lg	CJ	4.44	3.60	960.00	149.00	---	1109.00	1310.00
	Inst	Set	Sm	CJ	6.84	2.34	1020.00	229.00	---	1249.00	1500.00
Good quality workmanship	Inst	Set	Lg	CJ	3.56	4.50	900.00	119.00	---	1019.00	1200.00
	Inst	Set	Sm	CJ	5.46	2.93	960.00	183.00	---	1143.00	1360.00
Average quality workmanship	Inst	Set	Lg	CJ	2.96	5.40	750.00	99.20	---	849.20	1000.00
	Inst	Set	Sm	CJ	4.56	3.51	800.00	153.00	---	953.00	1130.00
32", 36" x 108" W											
High quality workmanship	Inst	Set	Lg	CJ	4.44	3.60	1140.00	149.00	---	1289.00	1520.00
	Inst	Set	Sm	CJ	6.84	2.34	1220.00	229.00	---	1449.00	1720.00
Good quality workmanship	Inst	Set	Lg	CJ	3.56	4.50	1070.00	119.00	---	1189.00	1400.00
	Inst	Set	Sm	CJ	5.46	2.93	1140.00	183.00	---	1323.00	1570.00
Average quality workmanship	Inst	Set	Lg	CJ	2.96	5.40	900.00	99.20	---	999.20	1170.00
	Inst	Set	Sm	CJ	4.56	3.51	960.00	153.00	---	1113.00	1320.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
20", 24" x 120" W											
High quality workmanship	Inst	Set	Lg	CJ	4.44	3.60	1050.00	149.00	---	1199.00	1420.00
	Inst	Set	Sm	CJ	6.84	2.34	1120.00	229.00	---	1349.00	1610.00
Good quality workmanship	Inst	Set	Lg	CJ	3.56	4.50	990.00	119.00	---	1109.00	1310.00
	Inst	Set	Sm	CJ	5.46	2.93	1060.00	183.00	---	1243.00	1470.00
Average quality workmanship	Inst	Set	Lg	CJ	2.96	5.40	825.00	99.20	---	924.20	1090.00
	Inst	Set	Sm	CJ	4.56	3.51	880.00	153.00	---	1033.00	1230.00
32", 36" x 120" W											
High quality workmanship	Inst	Set	Lg	CJ	4.44	3.60	1210.00	149.00	---	1359.00	1600.00
	Inst	Set	Sm	CJ	6.84	2.34	1290.00	229.00	---	1519.00	1800.00
Good quality workmanship	Inst	Set	Lg	CJ	3.56	4.50	1130.00	119.00	---	1249.00	1470.00
	Inst	Set	Sm	CJ	5.46	2.93	1210.00	183.00	---	1393.00	1650.00
Average quality workmanship	Inst	Set	Lg	CJ	2.96	5.40	945.00	99.20	---	1044.20	1230.00
	Inst	Set	Sm	CJ	4.56	3.51	1010.00	153.00	---	1163.00	1370.00
20", 24" x 144" W											
High quality workmanship	Inst	Set	Lg	CJ	4.44	3.60	1140.00	149.00	---	1289.00	1520.00
	Inst	Set	Sm	CJ	6.84	2.34	1220.00	229.00	---	1449.00	1720.00
Good quality workmanship	Inst	Set	Lg	CJ	3.56	4.50	1070.00	119.00	---	1189.00	1400.00
	Inst	Set	Sm	CJ	5.46	2.93	1140.00	183.00	---	1323.00	1570.00
Average quality workmanship	Inst	Set	Lg	CJ	2.96	5.40	893.00	99.20	---	992.20	1170.00
	Inst	Set	Sm	CJ	4.56	3.51	952.00	153.00	---	1105.00	1310.00
32", 36" x 144" W											
High quality workmanship	Inst	Set	Lg	CJ	4.44	3.60	1340.00	149.00	---	1489.00	1740.00
	Inst	Set	Sm	CJ	6.84	2.34	1420.00	229.00	---	1649.00	1960.00
Good quality workmanship	Inst	Set	Lg	CJ	3.56	4.50	1250.00	119.00	---	1369.00	1610.00
	Inst	Set	Sm	CJ	5.46	2.93	1340.00	183.00	---	1523.00	1790.00
Average quality workmanship	Inst	Set	Lg	CJ	2.96	5.40	1050.00	99.20	---	1149.20	1350.00
	Inst	Set	Sm	CJ	4.56	3.51	1120.00	153.00	---	1273.00	1500.00
For aluminum clad (baked white enamel exterior)											
ADD	Inst	%	Lg	---	---	---	12.0	---	---	12.0	---
	Inst	%	Sm	---	---	---	12.0	---	---	12.0	---

Casement windows; glazed 1/2" T insulating glass; unit includes: hardware, drip cap and weatherstripping; does not include screens; rough opening sizes

1 ventilating lite, no fixed lites; 20", 24", 28" W

36" H

High quality workmanship	Inst	Set	Lg	CJ	2.00	8.00	345.00	67.00	---	412.00	491.00
	Inst	Set	Sm	CJ	3.08	5.20	368.00	103.00	---	471.00	568.00
Good quality workmanship	Inst	Set	Lg	CJ	1.60	10.00	318.00	53.60	---	371.60	441.00
	Inst	Set	Sm	CJ	2.46	6.50	339.00	82.40	---	421.40	505.00
Average quality workmanship	Inst	Set	Lg	CJ	1.33	12.00	266.00	44.60	---	310.60	368.00
	Inst	Set	Sm	CJ	2.05	7.80	283.00	68.70	---	351.70	422.00

41" H

High quality workmanship	Inst	Set	Lg	CJ	2.11	7.60	368.00	70.70	---	438.70	522.00
	Inst	Set	Sm	CJ	3.24	4.94	392.00	109.00	---	501.00	603.00
Good quality workmanship	Inst	Set	Lg	CJ	1.68	9.50	341.00	56.30	---	397.30	470.00
	Inst	Set	Sm	CJ	2.59	6.18	363.00	86.80	---	449.80	539.00
Average quality workmanship	Inst	Set	Lg	CJ	1.40	11.40	284.00	46.90	---	330.90	392.00
	Inst	Set	Sm	CJ	2.16	7.41	302.00	72.40	---	374.40	449.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
48" H											
High quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	420.00	74.40	---	494.40	587.00
	Inst	Set	Sm	CJ	3.42	4.68	448.00	115.00	---	563.00	676.00
Good quality workmanship	Inst	Set	Lg	CJ	1.78	9.00	389.00	59.70	---	448.70	530.00
	Inst	Set	Sm	CJ	2.74	5.85	414.00	91.80	---	505.80	605.00
Average quality workmanship	Inst	Set	Lg	CJ	1.48	10.80	324.00	49.60	---	373.60	442.00
	Inst	Set	Sm	CJ	2.28	7.02	346.00	76.40	---	422.40	504.00
53" H											
High quality workmanship	Inst	Set	Lg	CJ	2.35	6.80	458.00	78.80	---	536.80	636.00
	Inst	Set	Sm	CJ	3.62	4.42	488.00	121.00	---	609.00	731.00
Good quality workmanship	Inst	Set	Lg	CJ	1.88	8.50	423.00	63.00	---	486.00	575.00
	Inst	Set	Sm	CJ	2.89	5.53	451.00	96.80	---	547.80	654.00
Average quality workmanship	Inst	Set	Lg	CJ	1.57	10.20	353.00	52.60	---	405.60	479.00
	Inst	Set	Sm	CJ	2.41	6.63	376.00	80.80	---	456.80	545.00
60" H											
High quality workmanship	Inst	Set	Lg	CJ	2.50	6.40	503.00	83.80	---	586.80	695.00
	Inst	Set	Sm	CJ	3.85	4.16	536.00	129.00	---	665.00	797.00
Good quality workmanship	Inst	Set	Lg	CJ	2.00	8.00	465.00	67.00	---	532.00	629.00
	Inst	Set	Sm	CJ	3.08	5.20	496.00	103.00	---	599.00	715.00
Average quality workmanship	Inst	Set	Lg	CJ	1.67	9.60	387.00	56.00	---	443.00	523.00
	Inst	Set	Sm	CJ	2.56	6.24	413.00	85.80	---	498.80	595.00
66" H											
High quality workmanship	Inst	Set	Lg	CJ	2.50	6.40	540.00	83.80	---	623.80	738.00
	Inst	Set	Sm	CJ	3.85	4.16	576.00	129.00	---	705.00	843.00
Good quality workmanship	Inst	Set	Lg	CJ	2.00	8.00	500.00	67.00	---	567.00	668.00
	Inst	Set	Sm	CJ	3.08	5.20	533.00	103.00	---	636.00	757.00
Average quality workmanship	Inst	Set	Lg	CJ	1.67	9.60	416.00	56.00	---	472.00	556.00
	Inst	Set	Sm	CJ	2.56	6.24	443.00	85.80	---	528.80	630.00
72" H											
High quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	578.00	89.50	---	667.50	789.00
	Inst	Set	Sm	CJ	4.10	3.90	616.00	137.00	---	753.00	901.00
Good quality workmanship	Inst	Set	Lg	CJ	2.13	7.50	534.00	71.40	---	605.40	714.00
	Inst	Set	Sm	CJ	3.28	4.88	570.00	110.00	---	680.00	809.00
Average quality workmanship	Inst	Set	Lg	CJ	1.78	9.00	446.00	59.70	---	505.70	596.00
	Inst	Set	Sm	CJ	2.74	5.85	475.00	91.80	---	566.80	675.00
2 ventilating lites, no fixed lites; 40" W											
36" H											
High quality workmanship	Inst	Set	Lg	CJ	2.50	6.40	570.00	83.80	---	653.80	773.00
	Inst	Set	Sm	CJ	3.85	4.16	608.00	129.00	---	737.00	880.00
Good quality workmanship	Inst	Set	Lg	CJ	2.00	8.00	527.00	67.00	---	594.00	699.00
	Inst	Set	Sm	CJ	3.08	5.20	562.00	103.00	---	665.00	790.00
Average quality workmanship	Inst	Set	Lg	CJ	1.67	9.60	440.00	56.00	---	496.00	584.00
	Inst	Set	Sm	CJ	2.56	6.24	469.00	85.80	---	554.80	659.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
41" H											
High quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	600.00	89.50	---	689.50	815.00
	Inst	Set	Sm	CJ	4.10	3.90	640.00	137.00	---	777.00	928.00
Good quality workmanship	Inst	Set	Lg	CJ	2.13	7.50	555.00	71.40	---	626.40	738.00
	Inst	Set	Sm	CJ	3.28	4.88	592.00	110.00	---	702.00	835.00
Average quality workmanship	Inst	Set	Lg	CJ	1.78	9.00	462.00	59.70	---	521.70	615.00
	Inst	Set	Sm	CJ	2.74	5.85	493.00	91.80	---	584.80	695.00
48" H											
High quality workmanship	Inst	Set	Lg	CJ	2.86	5.60	690.00	95.80	---	785.80	928.00
	Inst	Set	Sm	CJ	4.40	3.64	736.00	147.00	---	883.00	1050.00
Good quality workmanship	Inst	Set	Lg	CJ	2.29	7.00	638.00	76.70	---	714.70	841.00
	Inst	Set	Sm	CJ	3.52	4.55	680.00	118.00	---	798.00	947.00
Average quality workmanship	Inst	Set	Lg	CJ	1.90	8.40	581.00	63.70	---	594.70	700.00
	Inst	Set	Sm	CJ	2.93	5.46	566.00	98.20	---	664.20	789.00
53" H											
High quality workmanship	Inst	Set	Lg	CJ	3.08	5.20	750.00	103.00	---	853.00	1010.00
	Inst	Set	Sm	CJ	4.73	3.38	800.00	159.00	---	959.00	1140.00
Good quality workmanship	Inst	Set	Lg	CJ	2.46	6.50	695.00	82.40	---	777.40	914.00
	Inst	Set	Sm	CJ	3.78	4.23	741.00	127.00	---	868.00	1030.00
Average quality workmanship	Inst	Set	Lg	CJ	2.05	7.80	578.00	68.70	---	646.70	760.00
	Inst	Set	Sm	CJ	3.16	5.07	616.00	106.00	---	722.00	857.00
60" H											
High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	833.00	112.00	---	945.00	1110.00
	Inst	Set	Sm	CJ	5.13	3.12	888.00	172.00	---	1060.00	1260.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	770.00	89.50	---	859.50	1010.00
	Inst	Set	Sm	CJ	4.10	3.90	821.00	137.00	---	958.00	1140.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	642.00	74.40	---	716.40	842.00
	Inst	Set	Sm	CJ	3.42	4.68	685.00	115.00	---	800.00	948.00
66" H											
High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	870.00	112.00	---	982.00	1160.00
	Inst	Set	Sm	CJ	5.13	3.12	928.00	172.00	---	1100.00	1310.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	806.00	89.50	---	895.50	1050.00
	Inst	Set	Sm	CJ	4.10	3.90	859.00	137.00	---	996.00	1180.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	671.00	74.40	---	745.40	875.00
	Inst	Set	Sm	CJ	3.42	4.68	715.00	115.00	---	830.00	983.00
72" H											
High quality workmanship	Inst	Set	Lg	CJ	3.64	4.40	908.00	122.00	---	1030.00	1210.00
	Inst	Set	Sm	CJ	5.59	2.86	968.00	187.00	---	1155.00	1380.00
Good quality workmanship	Inst	Set	Lg	CJ	2.91	5.50	840.00	97.50	---	937.50	1100.00
	Inst	Set	Sm	CJ	4.47	3.58	896.00	150.00	---	1046.00	1240.00
Average quality workmanship	Inst	Set	Lg	CJ	2.42	6.60	699.00	81.10	---	780.10	917.00
	Inst	Set	Sm	CJ	3.73	4.29	746.00	125.00	---	871.00	1030.00

Description	Oper	Unit	Vol	Crew Size	Man-hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
2 ventilating lites, no fixed lites; 48" W											
36" H											
High quality workmanship	Inst	Set	Lg	CJ	2.50	6.40	615.00	83.80	---	698.80	825.00
	Inst	Set	Sm	CJ	3.85	4.16	656.00	129.00	---	785.00	935.00
Good quality workmanship	Inst	Set	Lg	CJ	2.00	8.00	570.00	67.00	---	637.00	749.00
	Inst	Set	Sm	CJ	3.08	5.20	608.00	103.00	---	711.00	844.00
Average quality workmanship	Inst	Set	Lg	CJ	1.67	9.60	474.00	56.00	---	530.00	623.00
	Inst	Set	Sm	CJ	2.56	6.24	506.00	85.80	---	591.80	702.00
41" H											
High quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	668.00	89.50	---	757.50	893.00
	Inst	Set	Sm	CJ	4.10	3.90	712.00	137.00	---	849.00	1010.00
Good quality workmanship	Inst	Set	Lg	CJ	2.13	7.50	618.00	71.40	---	689.40	811.00
	Inst	Set	Sm	CJ	3.28	4.88	659.00	110.00	---	769.00	912.00
Average quality workmanship	Inst	Set	Lg	CJ	1.78	9.00	515.00	59.70	---	574.70	675.00
	Inst	Set	Sm	CJ	2.74	5.85	549.00	91.80	---	640.80	760.00
48" H											
High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	735.00	112.00	---	847.00	1000.00
	Inst	Set	Sm	CJ	5.13	3.12	784.00	172.00	---	956.00	1140.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	680.00	89.50	---	769.50	907.00
	Inst	Set	Sm	CJ	4.10	3.90	729.00	137.00	---	862.00	1030.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	567.00	74.40	---	641.40	756.00
	Inst	Set	Sm	CJ	3.42	4.68	605.00	115.00	---	720.00	856.00
53" H											
High quality workmanship	Inst	Set	Lg	CJ	3.08	5.20	803.00	103.00	---	906.00	1070.00
	Inst	Set	Sm	CJ	4.73	3.38	856.00	159.00	---	1015.00	1210.00
Good quality workmanship	Inst	Set	Lg	CJ	2.46	6.50	743.00	82.40	---	825.40	969.00
	Inst	Set	Sm	CJ	3.78	4.23	792.00	127.00	---	919.00	1090.00
Average quality workmanship	Inst	Set	Lg	CJ	2.05	7.80	618.00	68.70	---	686.70	807.00
	Inst	Set	Sm	CJ	3.16	5.07	659.00	106.00	---	765.00	906.00
60" H											
High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	848.00	112.00	---	960.00	1130.00
	Inst	Set	Sm	CJ	5.13	3.12	904.00	172.00	---	1076.00	1280.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	785.00	89.50	---	874.50	1030.00
	Inst	Set	Sm	CJ	4.10	3.90	837.00	137.00	---	974.00	1150.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	653.00	74.40	---	727.40	855.00
	Inst	Set	Sm	CJ	3.42	4.68	696.00	115.00	---	811.00	961.00
66" H											
High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	908.00	112.00	---	1020.00	1200.00
	Inst	Set	Sm	CJ	5.13	3.12	968.00	172.00	---	1140.00	1350.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	840.00	89.50	---	929.50	1090.00
	Inst	Set	Sm	CJ	4.10	3.90	896.00	137.00	---	1033.00	1220.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	699.00	74.40	---	773.40	908.00
	Inst	Set	Sm	CJ	3.42	4.68	746.00	115.00	---	861.00	1020.00
72" H											
High quality workmanship	Inst	Set	Lg	CJ	3.64	4.40	968.00	122.00	---	1090.00	1280.00
	Inst	Set	Sm	CJ	5.59	2.86	1030.00	187.00	---	1217.00	1450.00
Good quality workmanship	Inst	Set	Lg	CJ	2.91	5.50	896.00	97.50	---	993.50	1170.00
	Inst	Set	Sm	CJ	4.47	3.58	955.00	150.00	---	1105.00	1310.00
Average quality workmanship	Inst	Set	Lg	CJ	2.42	6.60	746.00	81.10	---	827.10	971.00
	Inst	Set	Sm	CJ	3.73	4.29	795.00	125.00	---	920.00	1090.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
2 ventilating lites, no fixed lites; 56" W											
36" H											
High quality workmanship	Inst	Set	Lg	CJ	2.50	6.40	668.00	83.80	---	751.80	885.00
	Inst	Set	Sm	CJ	3.85	4.16	712.00	129.00	---	841.00	999.00
Good quality workmanship	Inst	Set	Lg	CJ	2.00	8.00	618.00	67.00	---	685.00	805.00
	Inst	Set	Sm	CJ	3.08	5.20	659.00	103.00	---	762.00	903.00
Average quality workmanship	Inst	Set	Lg	CJ	1.67	9.60	515.00	56.00	---	571.00	670.00
	Inst	Set	Sm	CJ	2.56	6.24	549.00	85.80	---	634.80	751.00
41" H											
High quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	735.00	89.50	---	824.50	971.00
	Inst	Set	Sm	CJ	4.10	3.90	784.00	137.00	---	921.00	1090.00
Good quality workmanship	Inst	Set	Lg	CJ	2.13	7.50	680.00	71.40	---	751.40	881.00
	Inst	Set	Sm	CJ	3.28	4.88	725.00	110.00	---	835.00	987.00
Average quality workmanship	Inst	Set	Lg	CJ	1.78	9.00	567.00	59.70	---	626.70	736.00
	Inst	Set	Sm	CJ	2.74	5.85	605.00	91.80	---	696.80	824.00
48" H											
High quality workmanship	Inst	Set	Lg	CJ	2.86	5.60	818.00	95.80	---	913.80	1070.00
	Inst	Set	Sm	CJ	4.40	3.64	872.00	147.00	---	1019.00	1210.00
Good quality workmanship	Inst	Set	Lg	CJ	2.29	7.00	756.00	76.70	---	832.70	977.00
	Inst	Set	Sm	CJ	3.52	4.55	806.00	118.00	---	924.00	1090.00
Average quality workmanship	Inst	Set	Lg	CJ	1.90	8.40	630.00	63.70	---	693.70	814.00
	Inst	Set	Sm	CJ	2.93	5.46	672.00	98.20	---	770.20	910.00
53" H											
High quality workmanship	Inst	Set	Lg	CJ	3.08	5.20	897.00	103.00	---	1000.00	1180.00
	Inst	Set	Sm	CJ	4.73	3.38	957.00	159.00	---	1116.00	1320.00
Good quality workmanship	Inst	Set	Lg	CJ	2.46	6.50	830.00	82.40	---	912.40	1070.00
	Inst	Set	Sm	CJ	3.78	4.23	885.00	127.00	---	1012.00	1190.00
Average quality workmanship	Inst	Set	Lg	CJ	2.05	7.80	692.00	68.70	---	760.70	891.00
	Inst	Set	Sm	CJ	3.16	5.07	738.00	106.00	---	844.00	996.00
60" H											
High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	975.00	112.00	---	1087.00	1280.00
	Inst	Set	Sm	CJ	5.13	3.12	1040.00	172.00	---	1212.00	1440.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	903.00	89.50	---	992.50	1160.00
	Inst	Set	Sm	CJ	4.10	3.90	963.00	137.00	---	1100.00	1300.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	752.00	74.40	---	826.40	968.00
	Inst	Set	Sm	CJ	3.42	4.68	802.00	115.00	---	917.00	1080.00
66" H											
High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	1040.00	112.00	---	1152.00	1360.00
	Inst	Set	Sm	CJ	5.13	3.12	1110.00	172.00	---	1282.00	1520.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	966.00	89.50	---	1055.50	1240.00
	Inst	Set	Sm	CJ	4.10	3.90	1030.00	137.00	---	1167.00	1380.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	804.00	74.40	---	878.40	1030.00
	Inst	Set	Sm	CJ	3.42	4.68	858.00	115.00	---	973.00	1150.00
72" H											
High quality workmanship	Inst	Set	Lg	CJ	3.64	4.40	1110.00	122.00	---	1232.00	1450.00
	Inst	Set	Sm	CJ	5.59	2.86	1180.00	187.00	---	1367.00	1620.00
Good quality workmanship	Inst	Set	Lg	CJ	2.91	5.50	1030.00	97.50	---	1127.50	1320.00
	Inst	Set	Sm	CJ	4.47	3.58	1100.00	150.00	---	1250.00	1470.00
Average quality workmanship	Inst	Set	Lg	CJ	2.42	6.60	855.00	81.10	---	936.10	1100.00
	Inst	Set	Sm	CJ	3.73	4.29	912.00	125.00	---	1037.00	1220.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
-------------	------	------	-----	--------------	------------------------------	------------------------------	------------------------------	------------------------------	------------------------------	------------------------------	-----------------------------

2 ventilating lites, no fixed lites; 72" W

36" H

High quality workmanship	Inst	Set	Lg	CJ	2.86	5.60	870.00	95.80	---	965.80	1130.00
	Inst	Set	Sm	CJ	4.40	3.64	928.00	147.00	---	1075.00	1270.00
Good quality workmanship	Inst	Set	Lg	CJ	2.29	7.00	806.00	76.70	---	882.70	1030.00
	Inst	Set	Sm	CJ	3.52	4.55	859.00	118.00	---	977.00	1150.00
Average quality workmanship	Inst	Set	Lg	CJ	1.90	8.40	671.00	63.70	---	734.70	860.00
	Inst	Set	Sm	CJ	2.93	5.46	715.00	98.20	---	813.20	960.00

41" H

High quality workmanship	Inst	Set	Lg	CJ	3.08	5.20	960.00	103.00	---	1063.00	1250.00
	Inst	Set	Sm	CJ	4.73	3.38	1020.00	159.00	---	1179.00	1400.00
Good quality workmanship	Inst	Set	Lg	CJ	2.46	6.50	888.00	82.40	---	970.40	1140.00
	Inst	Set	Sm	CJ	3.78	4.23	947.00	127.00	---	1074.00	1270.00
Average quality workmanship	Inst	Set	Lg	CJ	2.05	7.80	740.00	68.70	---	808.70	947.00
	Inst	Set	Sm	CJ	3.16	5.07	789.00	106.00	---	895.00	1060.00

48" H

High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	1040.00	112.00	---	1152.00	1360.00
	Inst	Set	Sm	CJ	5.13	3.12	1110.00	172.00	---	1282.00	1520.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	965.00	89.50	---	1054.50	1230.00
	Inst	Set	Sm	CJ	4.10	3.90	1030.00	137.00	---	1167.00	1380.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	804.00	74.40	---	878.40	1030.00
	Inst	Set	Sm	CJ	3.42	4.68	858.00	115.00	---	973.00	1150.00

60" H

High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	1190.00	112.00	---	1302.00	1520.00
	Inst	Set	Sm	CJ	5.13	3.12	1260.00	172.00	---	1432.00	1690.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	1100.00	89.50	---	1189.50	1390.00
	Inst	Set	Sm	CJ	4.10	3.90	1170.00	137.00	---	1307.00	1540.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	914.00	74.40	---	988.40	1150.00
	Inst	Set	Sm	CJ	3.42	4.68	974.00	115.00	---	1089.00	1280.00

4 ventilating lites, no fixed lites; 68" W

36" H

High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	1110.00	112.00	---	1222.00	1430.00
	Inst	Set	Sm	CJ	5.13	3.12	1180.00	172.00	---	1352.00	1600.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	1030.00	89.50	---	1119.50	1310.00
	Inst	Set	Sm	CJ	4.10	3.90	1100.00	137.00	---	1237.00	1450.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	855.00	74.40	---	929.40	1090.00
	Inst	Set	Sm	CJ	3.42	4.68	912.00	115.00	---	1027.00	1210.00

41" H

High quality workmanship	Inst	Set	Lg	CJ	3.64	4.40	1250.00	122.00	---	1372.00	1600.00
	Inst	Set	Sm	CJ	5.59	2.86	1330.00	187.00	---	1517.00	1790.00
Good quality workmanship	Inst	Set	Lg	CJ	2.91	5.50	1150.00	97.50	---	1247.50	1460.00
	Inst	Set	Sm	CJ	4.47	3.58	1230.00	150.00	---	1380.00	1620.00
Average quality workmanship	Inst	Set	Lg	CJ	2.42	6.60	960.00	81.10	---	1041.10	1220.00
	Inst	Set	Sm	CJ	3.73	4.29	1020.00	125.00	---	1145.00	1350.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
48" H											
High quality workmanship	Inst	Set	Lg	CJ	4.00	4.00	1430.00	134.00	---	1564.00	1830.00
	Inst	Set	Sm	CJ	6.15	2.60	1520.00	206.00	---	1726.00	2040.00
Good quality workmanship	Inst	Set	Lg	CJ	3.20	5.00	1320.00	107.00	---	1427.00	1670.00
	Inst	Set	Sm	CJ	4.92	3.25	1410.00	165.00	---	1575.00	1850.00
Average quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	1100.00	89.50	---	1189.50	1390.00
	Inst	Set	Sm	CJ	4.10	3.90	1170.00	137.00	---	1307.00	1540.00
60" H											
High quality workmanship	Inst	Set	Lg	CJ	4.44	3.60	1760.00	149.00	---	1909.00	2240.00
	Inst	Set	Sm	CJ	6.84	2.34	1880.00	229.00	---	2109.00	2480.00
Good quality workmanship	Inst	Set	Lg	CJ	3.56	4.50	1630.00	119.00	---	1749.00	2040.00
	Inst	Set	Sm	CJ	5.46	2.93	1740.00	183.00	---	1923.00	2250.00
Average quality workmanship	Inst	Set	Lg	CJ	2.96	5.40	1360.00	99.20	---	1459.20	1700.00
	Inst	Set	Sm	CJ	4.56	3.51	1450.00	153.00	---	1603.00	1880.00
72" H											
High quality workmanship	Inst	Set	Lg	CJ	5.00	3.20	1940.00	168.00	---	2108.00	2460.00
	Inst	Set	Sm	CJ	7.69	2.08	2060.00	258.00	---	2318.00	2730.00
Good quality workmanship	Inst	Set	Lg	CJ	4.00	4.00	1790.00	134.00	---	1924.00	2250.00
	Inst	Set	Sm	CJ	6.15	2.60	1910.00	206.00	---	2116.00	2490.00
Average quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	1490.00	112.00	---	1602.00	1870.00
	Inst	Set	Sm	CJ	5.13	3.12	1590.00	172.00	---	1762.00	2070.00
4 ventilating lites, no fixed lites; 82" W											
36" H											
High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	1210.00	112.00	---	1322.00	1540.00
	Inst	Set	Sm	CJ	5.13	3.12	1290.00	172.00	---	1462.00	1720.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	1120.00	89.50	---	1209.50	1410.00
	Inst	Set	Sm	CJ	4.10	3.90	1190.00	137.00	---	1327.00	1560.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	932.00	74.40	---	1006.40	1180.00
	Inst	Set	Sm	CJ	3.42	4.68	994.00	115.00	---	1109.00	1300.00
41" H											
High quality workmanship	Inst	Set	Lg	CJ	3.64	4.40	1280.00	122.00	---	1402.00	1640.00
	Inst	Set	Sm	CJ	5.59	2.86	1360.00	187.00	---	1547.00	1830.00
Good quality workmanship	Inst	Set	Lg	CJ	2.91	5.50	1180.00	97.50	---	1277.50	1490.00
	Inst	Set	Sm	CJ	4.47	3.58	1260.00	150.00	---	1410.00	1660.00
Average quality workmanship	Inst	Set	Lg	CJ	2.42	6.60	983.00	81.10	---	1064.10	1240.00
	Inst	Set	Sm	CJ	3.73	4.29	1050.00	125.00	---	1175.00	1380.00
48" H											
High quality workmanship	Inst	Set	Lg	CJ	4.00	4.00	1460.00	134.00	---	1594.00	1870.00
	Inst	Set	Sm	CJ	6.15	2.60	1560.00	206.00	---	1766.00	2080.00
Good quality workmanship	Inst	Set	Lg	CJ	3.20	5.00	1350.00	107.00	---	1457.00	1710.00
	Inst	Set	Sm	CJ	4.92	3.25	1440.00	165.00	---	1605.00	1890.00
Average quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	1130.00	89.50	---	1219.50	1420.00
	Inst	Set	Sm	CJ	4.10	3.90	1200.00	137.00	---	1337.00	1580.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
60" H											
High quality workmanship	Inst	Set	Lg	CJ	4.44	3.60	1790.00	149.00	---	1939.00	2260.00
	Inst	Set	Sm	CJ	6.84	2.34	1900.00	229.00	---	2129.00	2510.00
Good quality workmanship	Inst	Set	Lg	CJ	3.56	4.50	1650.00	119.00	---	1769.00	2070.00
	Inst	Set	Sm	CJ	5.46	2.93	1760.00	183.00	---	1943.00	2280.00
Average quality workmanship	Inst	Set	Lg	CJ	2.96	5.40	1380.00	99.20	---	1479.20	1720.00
	Inst	Set	Sm	CJ	4.56	3.51	1470.00	153.00	---	1623.00	1900.00
72" H											
High quality workmanship	Inst	Set	Lg	CJ	5.00	3.20	2050.00	168.00	---	2218.00	2590.00
	Inst	Set	Sm	CJ	7.69	2.08	2180.00	258.00	---	2438.00	2870.00
Good quality workmanship	Inst	Set	Lg	CJ	4.00	4.00	1890.00	134.00	---	2024.00	2370.00
	Inst	Set	Sm	CJ	6.15	2.60	2020.00	206.00	---	2226.00	2610.00
Average quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	1580.00	112.00	---	1692.00	1970.00
	Inst	Set	Sm	CJ	5.13	3.12	1680.00	172.00	---	1852.00	2180.00
4 ventilating lites, no fixed lites; 96" W											
36" H											
High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	1290.00	112.00	---	1402.00	1640.00
	Inst	Set	Sm	CJ	5.13	3.12	1380.00	172.00	---	1552.00	1820.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	1190.00	89.50	---	1279.50	1500.00
	Inst	Set	Sm	CJ	4.10	3.90	1270.00	137.00	---	1407.00	1660.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	995.00	74.40	---	1069.40	1250.00
	Inst	Set	Sm	CJ	3.42	4.68	1060.00	115.00	---	1175.00	1380.00
41" H											
High quality workmanship	Inst	Set	Lg	CJ	3.64	4.40	1410.00	122.00	---	1532.00	1790.00
	Inst	Set	Sm	CJ	5.59	2.86	1500.00	187.00	---	1687.00	1990.00
Good quality workmanship	Inst	Set	Lg	CJ	2.91	5.50	1310.00	97.50	---	1407.50	1640.00
	Inst	Set	Sm	CJ	4.47	3.58	1390.00	150.00	---	1540.00	1810.00
Average quality workmanship	Inst	Set	Lg	CJ	2.42	6.60	1090.00	81.10	---	1171.10	1360.00
	Inst	Set	Sm	CJ	3.73	4.29	1160.00	125.00	---	1285.00	1510.00
48" H											
High quality workmanship	Inst	Set	Lg	CJ	4.00	4.00	1550.00	134.00	---	1684.00	1960.00
	Inst	Set	Sm	CJ	6.15	2.60	1650.00	206.00	---	1856.00	2180.00
Good quality workmanship	Inst	Set	Lg	CJ	3.20	5.00	1430.00	107.00	---	1537.00	1800.00
	Inst	Set	Sm	CJ	4.92	3.25	1530.00	165.00	---	1695.00	1990.00
Average quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	1190.00	89.50	---	1279.50	1500.00
	Inst	Set	Sm	CJ	4.10	3.90	1270.00	137.00	---	1407.00	1660.00
60" H											
High quality workmanship	Inst	Set	Lg	CJ	4.44	3.60	1940.00	149.00	---	2089.00	2440.00
	Inst	Set	Sm	CJ	6.84	2.34	2070.00	229.00	---	2299.00	2700.00
Good quality workmanship	Inst	Set	Lg	CJ	3.56	4.50	1800.00	119.00	---	1919.00	2240.00
	Inst	Set	Sm	CJ	5.46	2.93	1920.00	183.00	---	2103.00	2460.00
Average quality workmanship	Inst	Set	Lg	CJ	2.96	5.40	1500.00	99.20	---	1599.20	1860.00
	Inst	Set	Sm	CJ	4.56	3.51	1600.00	153.00	---	1753.00	2050.00
72" H											
High quality workmanship	Inst	Set	Lg	CJ	5.00	3.20	2140.00	168.00	---	2308.00	2690.00
	Inst	Set	Sm	CJ	7.69	2.08	2280.00	258.00	---	2538.00	2980.00
Good quality workmanship	Inst	Set	Lg	CJ	4.00	4.00	1980.00	134.00	---	2114.00	2460.00
	Inst	Set	Sm	CJ	6.15	2.60	2110.00	206.00	---	2316.00	2720.00
Average quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	1650.00	112.00	---	1762.00	2050.00
	Inst	Set	Sm	CJ	5.13	3.12	1760.00	172.00	---	1932.00	2260.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
4 ventilating lites, no fixed lites; 114" W											
36" H											
High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	1400.00	112.00	---	1512.00	1770.00
	Inst	Set	Sm	CJ	5.13	3.12	1500.00	172.00	---	1672.00	1960.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	1300.00	89.50	---	1389.50	1620.00
	Inst	Set	Sm	CJ	4.10	3.90	1390.00	137.00	---	1527.00	1790.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	1080.00	74.40	---	1154.40	1350.00
	Inst	Set	Sm	CJ	3.42	4.68	1150.00	115.00	---	1265.00	1490.00
41" H											
High quality workmanship	Inst	Set	Lg	CJ	3.64	4.40	1510.00	122.00	---	1632.00	1900.00
	Inst	Set	Sm	CJ	5.59	2.86	1610.00	187.00	---	1797.00	2110.00
Good quality workmanship	Inst	Set	Lg	CJ	2.91	5.50	1400.00	97.50	---	1497.50	1740.00
	Inst	Set	Sm	CJ	4.47	3.58	1490.00	150.00	---	1640.00	1920.00
Average quality workmanship	Inst	Set	Lg	CJ	2.42	6.60	1160.00	81.10	---	1241.10	1450.00
	Inst	Set	Sm	CJ	3.73	4.29	1240.00	125.00	---	1365.00	1600.00
48" H											
High quality workmanship	Inst	Set	Lg	CJ	4.00	4.00	1720.00	134.00	---	1854.00	2160.00
	Inst	Set	Sm	CJ	6.15	2.60	1830.00	206.00	---	2036.00	2400.00
Good quality workmanship	Inst	Set	Lg	CJ	3.20	5.00	1590.00	107.00	---	1697.00	1980.00
	Inst	Set	Sm	CJ	4.92	3.25	1700.00	165.00	---	1865.00	2180.00
Average quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	1320.00	89.50	---	1409.50	1650.00
	Inst	Set	Sm	CJ	4.10	3.90	1410.00	137.00	---	1547.00	1820.00
60" H											
High quality workmanship	Inst	Set	Lg	CJ	4.44	3.60	2050.00	149.00	---	2199.00	2560.00
	Inst	Set	Sm	CJ	6.84	2.34	2180.00	229.00	---	2409.00	2830.00
Good quality workmanship	Inst	Set	Lg	CJ	3.56	4.50	1890.00	119.00	---	2009.00	2350.00
	Inst	Set	Sm	CJ	5.46	2.93	2020.00	183.00	---	2203.00	2580.00
Average quality workmanship	Inst	Set	Lg	CJ	2.96	5.40	1580.00	99.20	---	1679.20	1960.00
	Inst	Set	Sm	CJ	4.56	3.51	1680.00	153.00	---	1833.00	2150.00
72" H											
High quality workmanship	Inst	Set	Lg	CJ	5.00	3.20	2330.00	168.00	---	2498.00	2920.00
	Inst	Set	Sm	CJ	7.69	2.08	2490.00	258.00	---	2748.00	3220.00
Good quality workmanship	Inst	Set	Lg	CJ	4.00	4.00	2160.00	134.00	---	2294.00	2670.00
	Inst	Set	Sm	CJ	6.15	2.60	2300.00	206.00	---	2506.00	2940.00
Average quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	1800.00	112.00	---	1912.00	2220.00
	Inst	Set	Sm	CJ	5.13	3.12	1920.00	172.00	---	2092.00	2450.00
4 ventilating lites, 1 fixed lite; 86" W											
36" H											
High quality workmanship	Inst	Set	Lg	CJ	4.00	4.00	1400.00	134.00	---	1534.00	1800.00
	Inst	Set	Sm	CJ	6.15	2.60	1500.00	206.00	---	1706.00	2010.00
Good quality workmanship	Inst	Set	Lg	CJ	3.20	5.00	1300.00	107.00	---	1407.00	1640.00
	Inst	Set	Sm	CJ	4.92	3.25	1380.00	165.00	---	1545.00	1820.00
Average quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	1080.00	89.50	---	1169.50	1370.00
	Inst	Set	Sm	CJ	4.10	3.90	1150.00	137.00	---	1287.00	1520.00
41" H											
High quality workmanship	Inst	Set	Lg	CJ	4.44	3.60	1580.00	149.00	---	1729.00	2020.00
	Inst	Set	Sm	CJ	6.84	2.34	1680.00	229.00	---	1909.00	2250.00
Good quality workmanship	Inst	Set	Lg	CJ	3.56	4.50	1460.00	119.00	---	1579.00	1840.00
	Inst	Set	Sm	CJ	5.46	2.93	1560.00	183.00	---	1743.00	2040.00
Average quality workmanship	Inst	Set	Lg	CJ	2.96	5.40	1220.00	99.20	---	1319.20	1540.00
	Inst	Set	Sm	CJ	4.56	3.51	1300.00	153.00	---	1453.00	1700.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
48" H											
High quality workmanship	Inst	Set	Lg	CJ	5.00	3.20	1790.00	168.00	---	1958.00	2290.00
	Inst	Set	Sm	CJ	7.69	2.08	1900.00	258.00	---	2158.00	2550.00
Good quality workmanship	Inst	Set	Lg	CJ	4.00	4.00	1380.00	134.00	---	1514.00	1770.00
	Inst	Set	Sm	CJ	6.15	2.60	1470.00	206.00	---	1676.00	1980.00
Average quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	1150.00	112.00	---	1262.00	1480.00
	Inst	Set	Sm	CJ	5.13	3.12	1220.00	172.00	---	1392.00	1650.00
64" H											
High quality workmanship	Inst	Set	Lg	CJ	5.71	2.80	2410.00	191.00	---	2601.00	3040.00
	Inst	Set	Sm	CJ	8.79	1.82	2570.00	295.00	---	2865.00	3370.00
Good quality workmanship	Inst	Set	Lg	CJ	4.57	3.50	2230.00	153.00	---	2383.00	2780.00
	Inst	Set	Sm	CJ	7.02	2.28	2380.00	235.00	---	2615.00	3060.00
Average quality workmanship	Inst	Set	Lg	CJ	3.81	4.20	1860.00	128.00	---	1988.00	2310.00
	Inst	Set	Sm	CJ	5.86	2.73	1980.00	196.00	---	2176.00	2550.00
72" H											
High quality workmanship	Inst	Set	Lg	CJ	6.67	2.40	2650.00	224.00	---	2874.00	3360.00
	Inst	Set	Sm	CJ	10.3	1.56	2820.00	345.00	---	3165.00	3730.00
Good quality workmanship	Inst	Set	Lg	CJ	5.33	3.00	2450.00	179.00	---	2629.00	3070.00
	Inst	Set	Sm	CJ	8.21	1.95	2610.00	275.00	---	2885.00	3390.00
Average quality workmanship	Inst	Set	Lg	CJ	4.44	3.60	2040.00	149.00	---	2189.00	2560.00
	Inst	Set	Sm	CJ	6.84	2.34	2180.00	229.00	---	2409.00	2830.00
4 ventilating lites, 1 fixed lite; 112" W											
36" H											
High quality workmanship	Inst	Set	Lg	CJ	4.00	4.00	1510.00	134.00	---	1644.00	1920.00
	Inst	Set	Sm	CJ	6.15	2.60	1610.00	206.00	---	1816.00	2140.00
Good quality workmanship	Inst	Set	Lg	CJ	3.20	5.00	1400.00	107.00	---	1507.00	1750.00
	Inst	Set	Sm	CJ	4.92	3.25	1490.00	165.00	---	1655.00	1940.00
Average quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	1160.00	89.50	---	1249.50	1460.00
	Inst	Set	Sm	CJ	4.10	3.90	1240.00	137.00	---	1377.00	1620.00
41" H											
High quality workmanship	Inst	Set	Lg	CJ	4.44	3.60	1610.00	149.00	---	1759.00	2050.00
	Inst	Set	Sm	CJ	6.84	2.34	1710.00	229.00	---	1939.00	2290.00
Good quality workmanship	Inst	Set	Lg	CJ	3.56	4.50	1490.00	119.00	---	1609.00	1870.00
	Inst	Set	Sm	CJ	5.46	2.93	1580.00	183.00	---	1763.00	2080.00
Average quality workmanship	Inst	Set	Lg	CJ	2.96	5.40	1240.00	99.20	---	1339.20	1560.00
	Inst	Set	Sm	CJ	4.56	3.51	1320.00	153.00	---	1473.00	1730.00
48" H											
High quality workmanship	Inst	Set	Lg	CJ	5.00	3.20	1820.00	168.00	---	1988.00	2330.00
	Inst	Set	Sm	CJ	7.69	2.08	1940.00	258.00	---	2198.00	2600.00
Good quality workmanship	Inst	Set	Lg	CJ	4.00	4.00	1690.00	134.00	---	1824.00	2130.00
	Inst	Set	Sm	CJ	6.15	2.60	1800.00	206.00	---	2006.00	2360.00
Average quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	1410.00	112.00	---	1522.00	1770.00
	Inst	Set	Sm	CJ	5.13	3.12	1500.00	172.00	---	1672.00	1960.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
60" H											
High quality workmanship	Inst	Set	Lg	CJ	5.71	2.80	2210.00	191.00	---	2401.00	2810.00
	Inst	Set	Sm	CJ	8.79	1.82	2360.00	295.00	---	2655.00	3130.00
Good quality workmanship	Inst	Set	Lg	CJ	4.57	3.50	2050.00	153.00	---	2203.00	2570.00
	Inst	Set	Sm	CJ	7.02	2.28	2180.00	235.00	---	2415.00	2840.00
Average quality workmanship	Inst	Set	Lg	CJ	3.81	4.20	1710.00	128.00	---	1838.00	2140.00
	Inst	Set	Sm	CJ	5.86	2.73	1820.00	196.00	---	2016.00	2370.00
72" H											
High quality workmanship	Inst	Set	Lg	CJ	6.67	2.40	2440.00	224.00	---	2664.00	3120.00
	Inst	Set	Sm	CJ	10.3	1.56	2600.00	345.00	---	2945.00	3470.00
Good quality workmanship	Inst	Set	Lg	CJ	5.33	3.00	2260.00	179.00	---	2439.00	2840.00
	Inst	Set	Sm	CJ	8.21	1.95	2410.00	275.00	---	2685.00	3150.00
Average quality workmanship	Inst	Set	Lg	CJ	4.44	3.60	1880.00	149.00	---	2029.00	2370.00
	Inst	Set	Sm	CJ	6.84	2.34	2000.00	229.00	---	2229.00	2630.00
4 ventilating lites, 1 fixed lite; 120" W											
36" H											
High quality workmanship	Inst	Set	Lg	CJ	4.00	4.00	1610.00	134.00	---	1744.00	2030.00
	Inst	Set	Sm	CJ	6.15	2.60	1710.00	206.00	---	1916.00	2260.00
Good quality workmanship	Inst	Set	Lg	CJ	3.20	5.00	1490.00	107.00	---	1597.00	1860.00
	Inst	Set	Sm	CJ	4.92	3.25	1590.00	165.00	---	1755.00	2050.00
Average quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	1240.00	89.50	---	1329.50	1550.00
	Inst	Set	Sm	CJ	4.10	3.90	1320.00	137.00	---	1457.00	1710.00
41" H											
High quality workmanship	Inst	Set	Lg	CJ	4.44	3.60	1770.00	149.00	---	1919.00	2240.00
	Inst	Set	Sm	CJ	6.84	2.34	1890.00	229.00	---	2119.00	2490.00
Good quality workmanship	Inst	Set	Lg	CJ	3.56	4.50	1640.00	119.00	---	1759.00	2050.00
	Inst	Set	Sm	CJ	5.46	2.93	1750.00	183.00	---	1933.00	2270.00
Average quality workmanship	Inst	Set	Lg	CJ	2.96	5.40	1370.00	99.20	---	1469.20	1710.00
	Inst	Set	Sm	CJ	4.56	3.51	1460.00	153.00	---	1613.00	1890.00
48" H											
High quality workmanship	Inst	Set	Lg	CJ	5.00	3.20	1940.00	168.00	---	2108.00	2460.00
	Inst	Set	Sm	CJ	7.69	2.08	2060.00	258.00	---	2318.00	2730.00
Good quality workmanship	Inst	Set	Lg	CJ	4.00	4.00	1790.00	134.00	---	1924.00	2250.00
	Inst	Set	Sm	CJ	6.15	2.60	1910.00	206.00	---	2116.00	2490.00
Average quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	1490.00	112.00	---	1602.00	1870.00
	Inst	Set	Sm	CJ	5.13	3.12	1590.00	172.00	---	1762.00	2070.00
60" H											
High quality workmanship	Inst	Set	Lg	CJ	5.71	2.80	2230.00	191.00	---	2421.00	2830.00
	Inst	Set	Sm	CJ	8.79	1.82	2380.00	295.00	---	2675.00	3140.00
Good quality workmanship	Inst	Set	Lg	CJ	4.57	3.50	2060.00	153.00	---	2213.00	2590.00
	Inst	Set	Sm	CJ	7.02	2.28	2200.00	235.00	---	2435.00	2860.00
Average quality workmanship	Inst	Set	Lg	CJ	3.81	4.20	1720.00	128.00	---	1848.00	2150.00
	Inst	Set	Sm	CJ	5.86	2.73	1830.00	196.00	---	2026.00	2380.00
72" H											
High quality workmanship	Inst	Set	Lg	CJ	6.67	2.40	2600.00	224.00	---	2824.00	3310.00
	Inst	Set	Sm	CJ	10.3	1.56	2780.00	345.00	---	3125.00	3680.00
Good quality workmanship	Inst	Set	Lg	CJ	5.33	3.00	2410.00	179.00	---	2589.00	3020.00
	Inst	Set	Sm	CJ	8.21	1.95	2570.00	275.00	---	2845.00	3340.00
Average quality workmanship	Inst	Set	Lg	CJ	4.44	3.60	2010.00	149.00	---	2159.00	2520.00
	Inst	Set	Sm	CJ	6.84	2.34	2140.00	229.00	---	2369.00	2780.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
4 ventilating lites, 1 fixed lite; 142" W											
36" H											
High quality workmanship	Inst	Set	Lg	CJ	4.00	4.00	1760.00	134.00	---	1894.00	2210.00
	Inst	Set	Sm	CJ	6.15	2.60	1870.00	206.00	---	2076.00	2440.00
Good quality workmanship	Inst	Set	Lg	CJ	3.20	5.00	1620.00	107.00	---	1727.00	2020.00
	Inst	Set	Sm	CJ	4.92	3.25	1730.00	165.00	---	1895.00	2220.00
Average quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	1350.00	89.50	---	1439.50	1680.00
	Inst	Set	Sm	CJ	4.10	3.90	1440.00	137.00	---	1577.00	1850.00
41" H											
High quality workmanship	Inst	Set	Lg	CJ	4.00	4.00	1890.00	134.00	---	2024.00	2360.00
	Inst	Set	Sm	CJ	6.15	2.60	2020.00	206.00	---	2226.00	2610.00
Good quality workmanship	Inst	Set	Lg	CJ	3.20	5.00	1750.00	107.00	---	1857.00	2160.00
	Inst	Set	Sm	CJ	4.92	3.25	1870.00	165.00	---	2035.00	2380.00
Average quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	1460.00	89.50	---	1549.50	1800.00
	Inst	Set	Sm	CJ	4.10	3.90	1560.00	137.00	---	1697.00	1980.00
48" H											
High quality workmanship	Inst	Set	Lg	CJ	5.00	3.20	2150.00	168.00	---	2318.00	2710.00
	Inst	Set	Sm	CJ	7.69	2.08	2300.00	258.00	---	2558.00	3000.00
Good quality workmanship	Inst	Set	Lg	CJ	4.00	4.00	1990.00	134.00	---	2124.00	2480.00
	Inst	Set	Sm	CJ	6.15	2.60	2120.00	206.00	---	2326.00	2730.00
Average quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	1660.00	112.00	---	1772.00	2070.00
	Inst	Set	Sm	CJ	5.13	3.12	1770.00	172.00	---	1942.00	2280.00
60" H											
High quality workmanship	Inst	Set	Lg	CJ	5.71	2.80	2580.00	191.00	---	2771.00	3230.00
	Inst	Set	Sm	CJ	8.79	1.82	2750.00	295.00	---	3045.00	3580.00
Good quality workmanship	Inst	Set	Lg	CJ	4.57	3.50	2390.00	153.00	---	2543.00	2960.00
	Inst	Set	Sm	CJ	7.02	2.28	2550.00	235.00	---	2785.00	3260.00
Average quality workmanship	Inst	Set	Lg	CJ	3.81	4.20	1990.00	128.00	---	2118.00	2470.00
	Inst	Set	Sm	CJ	5.86	2.73	2120.00	196.00	---	2316.00	2720.00
72" H											
High quality workmanship	Inst	Set	Lg	CJ	6.67	2.40	2960.00	224.00	---	3184.00	3710.00
	Inst	Set	Sm	CJ	10.3	1.56	3150.00	345.00	---	3495.00	4110.00
Good quality workmanship	Inst	Set	Lg	CJ	5.33	3.00	2740.00	179.00	---	2919.00	3400.00
	Inst	Set	Sm	CJ	8.21	1.95	2920.00	275.00	---	3195.00	3740.00
Average quality workmanship	Inst	Set	Lg	CJ	4.44	3.60	2280.00	149.00	---	2429.00	2830.00
	Inst	Set	Sm	CJ	6.84	2.34	2430.00	229.00	---	2659.00	3120.00
For aluminum clad (baked white enamel) exterior											
ADD	Inst	%	Lg	---	---	---	20.0	---	---	20.0	---
	Inst	%	Sm	---	---	---	20.0	---	---	20.0	---

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
Double hung windows; glazed 7/16" T insulating glass; two lites per unit; unit includes screens and weatherstripping; rough opening sizes											
1'-6" x 2'-0", 2'-6", 3'-0", 3'-6"											
High quality workmanship	Inst	Set	Lg	CA	2.50	3.20	360.00	92.60	---	452.60	544.00
	Inst	Set	Sm	CA	3.85	2.08	384.00	143.00	---	527.00	641.00
Good quality workmanship	Inst	Set	Lg	CA	2.00	4.00	332.00	74.00	---	406.00	485.00
	Inst	Set	Sm	CA	3.08	2.60	354.00	114.00	---	468.00	566.00
Average quality workmanship	Inst	Set	Lg	CA	1.67	4.80	294.00	61.80	---	355.80	425.00
	Inst	Set	Sm	CA	2.56	3.12	314.00	94.80	---	408.80	493.00
1'-6" x 4'-0", 4'-6", 5'-0", 5'-6"											
High quality workmanship	Inst	Set	Lg	CA	2.50	3.20	516.00	92.60	---	608.60	723.00
	Inst	Set	Sm	CA	3.85	2.08	550.00	143.00	---	693.00	833.00
Good quality workmanship	Inst	Set	Lg	CA	2.00	4.00	470.00	74.00	---	544.00	644.00
	Inst	Set	Sm	CA	3.08	2.60	501.00	114.00	---	615.00	736.00
Average quality workmanship	Inst	Set	Lg	CA	1.67	4.80	408.00	61.80	---	469.80	556.00
	Inst	Set	Sm	CA	2.56	3.12	435.00	94.80	---	529.80	633.00
2'-0" x 2'-0", 2'-6", 3'-0", 3'-6"											
High quality workmanship	Inst	Set	Lg	CA	2.50	3.20	372.00	92.60	---	464.60	557.00
	Inst	Set	Sm	CA	3.85	2.08	397.00	143.00	---	540.00	656.00
Good quality workmanship	Inst	Set	Lg	CA	2.00	4.00	329.00	74.00	---	403.00	481.00
	Inst	Set	Sm	CA	3.08	2.60	350.00	114.00	---	464.00	563.00
Average quality workmanship	Inst	Set	Lg	CA	1.67	4.80	308.00	61.80	---	369.80	440.00
	Inst	Set	Sm	CA	2.56	3.12	328.00	94.80	---	422.80	510.00
2'-0" x 4'-0", 4'-6", 5'-0", 6'-0"											
High quality workmanship	Inst	Set	Lg	CA	2.50	3.20	489.00	92.60	---	581.60	692.00
	Inst	Set	Sm	CA	3.85	2.08	522.00	143.00	---	665.00	799.00
Good quality workmanship	Inst	Set	Lg	CA	2.00	4.00	453.00	74.00	---	527.00	625.00
	Inst	Set	Sm	CA	3.08	2.60	483.00	114.00	---	597.00	715.00
Average quality workmanship	Inst	Set	Lg	CA	1.67	4.80	420.00	61.80	---	481.80	570.00
	Inst	Set	Sm	CA	2.56	3.12	448.00	94.80	---	542.80	648.00
2'-6" x 2'-0", 2'-6", 3'-0", 3'-6"											
High quality workmanship	Inst	Set	Lg	CA	2.50	3.20	387.00	92.60	---	479.60	575.00
	Inst	Set	Sm	CA	3.85	2.08	413.00	143.00	---	556.00	674.00
Good quality workmanship	Inst	Set	Lg	CA	2.00	4.00	359.00	74.00	---	433.00	516.00
	Inst	Set	Sm	CA	3.08	2.60	382.00	114.00	---	496.00	599.00
Average quality workmanship	Inst	Set	Lg	CA	1.67	4.80	318.00	61.80	---	379.80	452.00
	Inst	Set	Sm	CA	2.56	3.12	339.00	94.80	---	433.80	523.00
2'-6" x 4'-0", 4'-6", 5'-0", 6'-0"											
High quality workmanship	Inst	Set	Lg	CA	2.50	3.20	546.00	92.60	---	638.60	757.00
	Inst	Set	Sm	CA	3.85	2.08	582.00	143.00	---	725.00	869.00
Good quality workmanship	Inst	Set	Lg	CA	2.00	4.00	489.00	74.00	---	563.00	666.00
	Inst	Set	Sm	CA	3.08	2.60	522.00	114.00	---	636.00	759.00
Average quality workmanship	Inst	Set	Lg	CA	1.67	4.80	458.00	61.80	---	519.80	613.00
	Inst	Set	Sm	CA	2.56	3.12	488.00	94.80	---	582.80	694.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
3'-0" x 2'-0", 2'-6", 3'-0", 3'-6"											
High quality workmanship	Inst	Set	Lg	CA	2.50	3.20	449.00	92.60	---	541.60	645.00
	Inst	Set	Sm	CA	3.85	2.08	478.00	143.00	---	621.00	750.00
Good quality workmanship	Inst	Set	Lg	CA	2.00	4.00	378.00	74.00	---	452.00	538.00
	Inst	Set	Sm	CA	3.08	2.60	403.00	114.00	---	517.00	623.00
Average quality workmanship	Inst	Set	Lg	CA	1.67	4.80	345.00	61.80	---	406.80	483.00
	Inst	Set	Sm	CA	2.56	3.12	368.00	94.80	---	462.80	556.00
3'-0" x 4'-0", 4'-6", 5'-0", 6'-0"											
High quality workmanship	Inst	Set	Lg	CA	2.50	3.20	602.00	92.60	---	694.60	821.00
	Inst	Set	Sm	CA	3.85	2.08	642.00	143.00	---	785.00	937.00
Good quality workmanship	Inst	Set	Lg	CA	2.00	4.00	564.00	74.00	---	638.00	752.00
	Inst	Set	Sm	CA	3.08	2.60	602.00	114.00	---	716.00	851.00
Average quality workmanship	Inst	Set	Lg	CA	1.67	4.80	498.00	61.80	---	559.80	659.00
	Inst	Set	Sm	CA	2.56	3.12	531.00	94.80	---	625.80	744.00
3'-6" x 3'-0", 3'-6", 4'-0"											
High quality workmanship	Inst	Set	Lg	CA	2.50	3.20	537.00	92.60	---	629.60	747.00
	Inst	Set	Sm	CA	3.85	2.08	573.00	143.00	---	716.00	858.00
Good quality workmanship	Inst	Set	Lg	CA	2.00	4.00	456.00	74.00	---	530.00	628.00
	Inst	Set	Sm	CA	3.08	2.60	486.00	114.00	---	600.00	719.00
Average quality workmanship	Inst	Set	Lg	CA	1.67	4.80	404.00	61.80	---	465.80	551.00
	Inst	Set	Sm	CA	2.56	3.12	430.00	94.80	---	524.80	628.00
3'-6" x 4'-6", 5'-0", 6'-0"											
High quality workmanship	Inst	Set	Lg	CA	2.50	3.20	738.00	92.60	---	830.60	978.00
	Inst	Set	Sm	CA	3.85	2.08	787.00	143.00	---	930.00	1100.00
Good quality workmanship	Inst	Set	Lg	CA	2.00	4.00	677.00	74.00	---	751.00	882.00
	Inst	Set	Sm	CA	3.08	2.60	722.00	114.00	---	836.00	989.00
Average quality workmanship	Inst	Set	Lg	CA	1.67	4.80	605.00	61.80	---	666.80	782.00
	Inst	Set	Sm	CA	2.56	3.12	645.00	94.80	---	739.80	874.00
4'-0" x 3'-0", 3'-6", 4'-0"											
High quality workmanship	Inst	Set	Lg	CA	2.50	3.20	783.00	92.60	---	875.60	1030.00
	Inst	Set	Sm	CA	3.85	2.08	835.00	143.00	---	978.00	1160.00
Good quality workmanship	Inst	Set	Lg	CA	2.00	4.00	630.00	74.00	---	704.00	828.00
	Inst	Set	Sm	CA	3.08	2.60	672.00	114.00	---	786.00	932.00
Average quality workmanship	Inst	Set	Lg	CA	1.67	4.80	471.00	61.80	---	532.80	628.00
	Inst	Set	Sm	CA	2.56	3.12	502.00	94.80	---	596.80	710.00
4'-0" x 4'-6", 5'-0", 6'-0"											
High quality workmanship	Inst	Set	Lg	CA	2.50	3.20	825.00	92.60	---	917.60	1080.00
	Inst	Set	Sm	CA	3.85	2.08	880.00	143.00	---	1023.00	1210.00
Good quality workmanship	Inst	Set	Lg	CA	2.00	4.00	750.00	74.00	---	824.00	966.00
	Inst	Set	Sm	CA	3.08	2.60	800.00	114.00	---	914.00	1080.00
Average quality workmanship	Inst	Set	Lg	CA	1.67	4.80	659.00	61.80	---	720.80	844.00
	Inst	Set	Sm	CA	2.56	3.12	702.00	94.80	---	796.80	940.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
4'-6" x 4'-0", 4'-6											
High quality workmanship	Inst	Set	Lg	CA	2.50	3.20	870.00	92.60	---	962.60	1130.00
	Inst	Set	Sm	CA	3.85	2.08	928.00	143.00	---	1071.00	1270.00
Good quality workmanship	Inst	Set	Lg	CA	2.00	4.00	675.00	74.00	---	749.00	880.00
	Inst	Set	Sm	CA	3.08	2.60	720.00	114.00	---	834.00	988.00
Average quality workmanship	Inst	Set	Lg	CA	1.67	4.80	567.00	61.80	---	628.80	739.00
	Inst	Set	Sm	CA	2.56	3.12	605.00	94.80	---	699.80	828.00
4'-6" x 5'-0", 6'-0"											
High quality workmanship	Inst	Set	Lg	CA	2.50	3.20	945.00	92.60	---	1037.60	1220.00
	Inst	Set	Sm	CA	3.85	2.08	1010.00	143.00	---	1153.00	1360.00
Good quality workmanship	Inst	Set	Lg	CA	2.00	4.00	780.00	74.00	---	854.00	1000.00
	Inst	Set	Sm	CA	3.08	2.60	832.00	114.00	---	946.00	1120.00
Average quality workmanship	Inst	Set	Lg	CA	1.67	4.80	701.00	61.80	---	762.80	892.00
	Inst	Set	Sm	CA	2.56	3.12	747.00	94.80	---	841.80	992.00
5'-0" x 4'-0", 4'-6											
High quality workmanship	Inst	Set	Lg	CA	2.50	3.20	1020.00	92.60	---	1112.60	1300.00
	Inst	Set	Sm	CA	3.85	2.08	1090.00	143.00	---	1233.00	1450.00
Good quality workmanship	Inst	Set	Lg	CA	2.00	4.00	885.00	74.00	---	959.00	1120.00
	Inst	Set	Sm	CA	3.08	2.60	944.00	114.00	---	1058.00	1250.00
Average quality workmanship	Inst	Set	Lg	CA	1.67	4.80	612.00	61.80	---	673.80	790.00
	Inst	Set	Sm	CA	2.56	3.12	653.00	94.80	---	747.80	883.00
5'-0" x 5'-0", 6'-0"											
High quality workmanship	Inst	Set	Lg	CA	2.50	3.20	1100.00	92.60	---	1192.60	1390.00
	Inst	Set	Sm	CA	3.85	2.08	1170.00	143.00	---	1313.00	1540.00
Good quality workmanship	Inst	Set	Lg	CA	2.00	4.00	945.00	74.00	---	1019.00	1190.00
	Inst	Set	Sm	CA	3.08	2.60	1010.00	114.00	---	1124.00	1320.00
Average quality workmanship	Inst	Set	Lg	CA	1.67	4.80	746.00	61.80	---	807.80	944.00
	Inst	Set	Sm	CA	2.56	3.12	795.00	94.80	---	889.80	1050.00

Picture windows**Unit with one fixed lite, 3/4" T insulating glass, frame sizes**

4'-0" W x 3'-6" H; 3'-6" W x 4'-0" H

High quality workmanship	Inst	Ea	Lg	CJ	1.82	8.80	456.00	61.00	---	517.00	610.00
	Inst	Ea	Sm	CJ	2.80	5.72	486.00	93.80	---	579.80	691.00
Good quality workmanship	Inst	Ea	Lg	CJ	1.45	11.00	420.00	48.60	---	468.60	551.00
	Inst	Ea	Sm	CJ	2.24	7.15	448.00	75.10	---	523.10	620.00
Average quality workmanship	Inst	Ea	Lg	CJ	1.21	13.20	351.00	40.60	---	391.60	460.00
	Inst	Ea	Sm	CJ	1.86	8.58	374.00	62.30	---	436.30	518.00

4'-8" W x 3'-6" H; 4'-0" W x 4'-0" H; 3'-6" W x 4'-8" H

High quality workmanship	Inst	Ea	Lg	CJ	1.82	8.80	525.00	61.00	---	586.00	689.00
	Inst	Ea	Sm	CJ	2.80	5.72	560.00	93.80	---	653.80	775.00
Good quality workmanship	Inst	Ea	Lg	CJ	1.45	11.00	486.00	48.60	---	534.60	627.00
	Inst	Ea	Sm	CJ	2.24	7.15	518.00	75.10	---	593.10	701.00
Average quality workmanship	Inst	Ea	Lg	CJ	1.21	13.20	405.00	40.60	---	445.60	523.00
	Inst	Ea	Sm	CJ	1.86	8.58	432.00	62.30	---	494.30	584.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
4'-8" W x 4'-0" H; 4'-0" W x 4'-10" H											
High quality workmanship	Inst	Ea	Lg	CJ	1.82	8.80	578.00	61.00	---	639.00	750.00
	Inst	Ea	Sm	CJ	2.80	5.72	616.00	93.80	---	709.80	840.00
Good quality workmanship	Inst	Ea	Lg	CJ	1.45	11.00	534.00	48.60	---	582.60	682.00
	Inst	Ea	Sm	CJ	2.24	7.15	570.00	75.10	---	645.10	760.00
Average quality workmanship	Inst	Ea	Lg	CJ	1.21	13.20	446.00	40.60	---	486.60	569.00
	Inst	Ea	Sm	CJ	1.86	8.58	475.00	62.30	---	537.30	634.00
4'-8" W x 4'-8" H											
High quality workmanship	Inst	Ea	Lg	CJ	2.00	8.00	630.00	67.00	---	697.00	818.00
	Inst	Ea	Sm	CJ	3.08	5.20	672.00	103.00	---	775.00	917.00
Good quality workmanship	Inst	Ea	Lg	CJ	1.60	10.00	582.00	53.60	---	635.60	744.00
	Inst	Ea	Sm	CJ	2.46	6.50	621.00	82.40	---	703.40	829.00
Average quality workmanship	Inst	Ea	Lg	CJ	1.33	12.00	486.00	44.60	---	530.60	621.00
	Inst	Ea	Sm	CJ	2.05	7.80	518.00	68.70	---	586.70	692.00
4'-8" W x 5'-6" H; 5'-4" W x 4'-8" H											
High quality workmanship	Inst	Ea	Lg	CJ	2.00	8.00	795.00	67.00	---	862.00	1010.00
	Inst	Ea	Sm	CJ	3.08	5.20	848.00	103.00	---	951.00	1120.00
Good quality workmanship	Inst	Ea	Lg	CJ	1.60	10.00	735.00	53.60	---	788.60	920.00
	Inst	Ea	Sm	CJ	2.46	6.50	784.00	82.40	---	866.40	1020.00
Average quality workmanship	Inst	Ea	Lg	CJ	1.33	12.00	612.00	44.60	---	656.60	766.00
	Inst	Ea	Sm	CJ	2.05	7.80	653.00	68.70	---	721.70	847.00
5'-4" W x 5'-6" H											
High quality workmanship	Inst	Ea	Lg	CJ	2.00	8.00	900.00	67.00	---	967.00	1130.00
	Inst	Ea	Sm	CJ	3.08	5.20	960.00	103.00	---	1063.00	1250.00
Good quality workmanship	Inst	Ea	Lg	CJ	1.60	10.00	833.00	53.60	---	886.60	1030.00
	Inst	Ea	Sm	CJ	2.46	6.50	888.00	82.40	---	970.40	1140.00
Average quality workmanship	Inst	Ea	Lg	CJ	1.33	12.00	693.00	44.60	---	737.60	859.00
	Inst	Ea	Sm	CJ	2.05	7.80	739.00	68.70	---	807.70	946.00
Unit with one fixed lite, glazed 3/4" T insulating glass and two glazed S.S.B. casement flankers, 15", 19" or 23" W; unit includes: hardware, casing and molding; rough opening sizes											
40" H											
88" W											
High quality workmanship	Inst	Set	Lg	CJ	2.50	6.40	1220.00	83.80	---	1303.80	1520.00
	Inst	Set	Sm	CJ	3.85	4.16	1300.00	129.00	---	1429.00	1680.00
Good quality workmanship	Inst	Set	Lg	CJ	2.00	8.00	1130.00	67.00	---	1197.00	1390.00
	Inst	Set	Sm	CJ	3.08	5.20	1210.00	103.00	---	1313.00	1530.00
Average quality workmanship	Inst	Set	Lg	CJ	1.67	9.60	942.00	56.00	---	998.00	1160.00
	Inst	Set	Sm	CJ	2.56	6.24	1000.00	85.80	---	1085.80	1280.00
96" W											
High quality workmanship	Inst	Set	Lg	CJ	2.50	6.40	1240.00	83.80	---	1323.80	1540.00
	Inst	Set	Sm	CJ	3.85	4.16	1320.00	129.00	---	1449.00	1700.00
Good quality workmanship	Inst	Set	Lg	CJ	2.00	8.00	1140.00	67.00	---	1207.00	1410.00
	Inst	Set	Sm	CJ	3.08	5.20	1220.00	103.00	---	1323.00	1550.00
Average quality workmanship	Inst	Set	Lg	CJ	1.67	9.60	954.00	56.00	---	1010.00	1180.00
	Inst	Set	Sm	CJ	2.56	6.24	1020.00	85.80	---	1105.80	1290.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
104" W											
High quality workmanship	Inst	Set	Lg	CJ	2.50	6.40	1410.00	83.80	---	1493.80	1740.00
	Inst	Set	Sm	CJ	3.85	4.16	1500.00	129.00	---	1629.00	1910.00
Good quality workmanship	Inst	Set	Lg	CJ	2.00	8.00	1310.00	67.00	---	1377.00	1590.00
	Inst	Set	Sm	CJ	3.08	5.20	1390.00	103.00	---	1493.00	1750.00
Average quality workmanship	Inst	Set	Lg	CJ	1.67	9.60	1090.00	56.00	---	1146.00	1330.00
	Inst	Set	Sm	CJ	2.56	6.24	1160.00	85.80	---	1245.80	1450.00
112" W											
High quality workmanship	Inst	Set	Lg	CJ	2.50	6.40	1430.00	83.80	---	1513.80	1760.00
	Inst	Set	Sm	CJ	3.85	4.16	1520.00	129.00	---	1649.00	1930.00
Good quality workmanship	Inst	Set	Lg	CJ	2.00	8.00	1320.00	67.00	---	1387.00	1610.00
	Inst	Set	Sm	CJ	3.08	5.20	1410.00	103.00	---	1513.00	1760.00
Average quality workmanship	Inst	Set	Lg	CJ	1.67	9.60	1100.00	56.00	---	1156.00	1340.00
	Inst	Set	Sm	CJ	2.56	6.24	1170.00	85.80	---	1255.80	1460.00
48" H 88" W											
High quality workmanship	Inst	Set	Lg	CJ	2.50	6.40	1360.00	83.80	---	1443.80	1680.00
	Inst	Set	Sm	CJ	3.85	4.16	1450.00	129.00	---	1579.00	1850.00
Good quality workmanship	Inst	Set	Lg	CJ	2.00	8.00	1260.00	67.00	---	1327.00	1540.00
	Inst	Set	Sm	CJ	3.08	5.20	1340.00	103.00	---	1443.00	1680.00
Average quality workmanship	Inst	Set	Lg	CJ	1.67	9.60	1050.00	56.00	---	1106.00	1280.00
	Inst	Set	Sm	CJ	2.56	6.24	1120.00	85.80	---	1205.80	1400.00
96" W											
High quality workmanship	Inst	Set	Lg	CJ	2.86	5.60	1370.00	95.80	---	1465.80	1710.00
	Inst	Set	Sm	CJ	4.40	3.64	1460.00	147.00	---	1607.00	1890.00
Good quality workmanship	Inst	Set	Lg	CJ	2.29	7.00	1270.00	76.70	---	1346.70	1570.00
	Inst	Set	Sm	CJ	3.52	4.55	1360.00	118.00	---	1478.00	1720.00
Average quality workmanship	Inst	Set	Lg	CJ	1.90	8.40	1060.00	63.70	---	1123.70	1310.00
	Inst	Set	Sm	CJ	2.93	5.46	1130.00	98.20	---	1228.20	1440.00
104" W											
High quality workmanship	Inst	Set	Lg	CJ	2.86	5.60	1600.00	95.80	---	1695.80	1970.00
	Inst	Set	Sm	CJ	4.40	3.64	1700.00	147.00	---	1847.00	2170.00
Good quality workmanship	Inst	Set	Lg	CJ	2.29	7.00	1480.00	76.70	---	1556.70	1810.00
	Inst	Set	Sm	CJ	3.52	4.55	1580.00	118.00	---	1698.00	1980.00
Average quality workmanship	Inst	Set	Lg	CJ	1.90	8.40	1230.00	63.70	---	1293.70	1510.00
	Inst	Set	Sm	CJ	2.93	5.46	1310.00	98.20	---	1408.20	1650.00
112" W											
High quality workmanship	Inst	Set	Lg	CJ	2.86	5.60	1610.00	95.80	---	1705.80	1990.00
	Inst	Set	Sm	CJ	4.40	3.64	1720.00	147.00	---	1867.00	2180.00
Good quality workmanship	Inst	Set	Lg	CJ	2.29	7.00	1490.00	76.70	---	1566.70	1820.00
	Inst	Set	Sm	CJ	3.52	4.55	1590.00	118.00	---	1708.00	2000.00
Average quality workmanship	Inst	Set	Lg	CJ	1.90	8.40	1240.00	63.70	---	1303.70	1520.00
	Inst	Set	Sm	CJ	2.93	5.46	1330.00	98.20	---	1428.20	1660.00

Description	Oper	Unit	Vol	Crew Size	Man-hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
60" H 88" W											
High quality workmanship	Inst	Set	Lg	CJ	2.86	5.60	1610.00	95.80	---	1705.80	1980.00
	Inst	Set	Sm	CJ	4.40	3.64	1710.00	147.00	---	1857.00	2180.00
Good quality workmanship	Inst	Set	Lg	CJ	2.29	7.00	1490.00	76.70	---	1566.70	1820.00
	Inst	Set	Sm	CJ	3.52	4.55	1580.00	118.00	---	1698.00	1990.00
Average quality workmanship	Inst	Set	Lg	CJ	1.90	8.40	1240.00	63.70	---	1303.70	1510.00
	Inst	Set	Sm	CJ	2.93	5.46	1320.00	98.20	---	1418.20	1660.00
96" W											
High quality workmanship	Inst	Set	Lg	CJ	2.86	5.60	1620.00	95.80	---	1715.80	2000.00
	Inst	Set	Sm	CJ	4.40	3.64	1730.00	147.00	---	1877.00	2190.00
Good quality workmanship	Inst	Set	Lg	CJ	2.29	7.00	1500.00	76.70	---	1576.70	1830.00
	Inst	Set	Sm	CJ	3.52	4.55	1600.00	118.00	---	1718.00	2010.00
Average quality workmanship	Inst	Set	Lg	CJ	1.90	8.40	1250.00	63.70	---	1313.70	1530.00
	Inst	Set	Sm	CJ	2.93	5.46	1330.00	98.20	---	1428.20	1670.00
104" W											
High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	2030.00	112.00	---	2142.00	2490.00
	Inst	Set	Sm	CJ	5.13	3.12	2170.00	172.00	---	2342.00	2730.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	1880.00	89.50	---	1969.50	2290.00
	Inst	Set	Sm	CJ	4.10	3.90	2010.00	137.00	---	2147.00	2500.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	1570.00	74.40	---	1644.40	1910.00
	Inst	Set	Sm	CJ	3.42	4.68	1670.00	115.00	---	1785.00	2080.00
112" W											
High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	2050.00	112.00	---	2162.00	2510.00
	Inst	Set	Sm	CJ	5.13	3.12	2180.00	172.00	---	2352.00	2750.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	1890.00	89.50	---	1979.50	2300.00
	Inst	Set	Sm	CJ	4.10	3.90	2020.00	137.00	---	2157.00	2520.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	1580.00	74.40	---	1654.40	1920.00
	Inst	Set	Sm	CJ	3.42	4.68	1680.00	115.00	---	1795.00	2100.00
72" H 88" W											
High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	1890.00	112.00	---	2002.00	2330.00
	Inst	Set	Sm	CJ	5.13	3.12	2020.00	172.00	---	2192.00	2560.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	1750.00	89.50	---	1839.50	2140.00
	Inst	Set	Sm	CJ	4.10	3.90	1870.00	137.00	---	2007.00	2340.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	1460.00	74.40	---	1534.40	1780.00
	Inst	Set	Sm	CJ	3.42	4.68	1560.00	115.00	---	1675.00	1950.00
96" W											
High quality workmanship	Inst	Set	Lg	CJ	3.33	4.80	1910.00	112.00	---	2022.00	2350.00
	Inst	Set	Sm	CJ	5.13	3.12	2030.00	172.00	---	2202.00	2580.00
Good quality workmanship	Inst	Set	Lg	CJ	2.67	6.00	1760.00	89.50	---	1849.50	2150.00
	Inst	Set	Sm	CJ	4.10	3.90	1880.00	137.00	---	2017.00	2350.00
Average quality workmanship	Inst	Set	Lg	CJ	2.22	7.20	1470.00	74.40	---	1544.40	1790.00
	Inst	Set	Sm	CJ	3.42	4.68	1570.00	115.00	---	1685.00	1960.00
Material adjustments											
For glazed 1/2" insulated flankers,											
ADD	Inst	%	Lg	---	---	---	15.0	---	---	---	---
	Inst	%	Sm	---	---	---	15.0	---	---	---	---
For screen per flanker,											
ADD	Inst	Ea	Lg	---	---	---	7.50	---	---	7.50	8.63
	Inst	Ea	Sm	---	---	---	8.00	---	---	8.00	9.20

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
-------------	------	------	-----	--------------	------------------------------	------------------------------	------------------------------	------------------------------	------------------------------	------------------------------	-----------------------------

Garden windows, unit extends out 13-1/4" from wall, bronze tempered glass in top panels of all units, wood shelves included

1 fixed lite

Single glazed

3'-0" x 3'-0" H

High quality workmanship	Inst	Ea	Lg	CJ	4.44	3.60	626.00	149.00	---	775.00	928.00
	Inst	Ea	Sm	CJ	6.84	2.34	667.00	229.00	---	896.00	1090.00
Good quality workmanship	Inst	Ea	Lg	CJ	3.56	4.50	573.00	119.00	---	692.00	826.00
	Inst	Ea	Sm	CJ	5.46	2.93	611.00	183.00	---	794.00	959.00
Average quality workmanship	Inst	Ea	Lg	CJ	2.96	5.40	479.00	99.20	---	578.20	689.00
	Inst	Ea	Sm	CJ	4.56	3.51	510.00	153.00	---	663.00	801.00

3'-0" x 4'-0" H

High quality workmanship	Inst	Ea	Lg	CJ	4.44	3.60	678.00	149.00	---	827.00	988.00
	Inst	Ea	Sm	CJ	6.84	2.34	723.00	229.00	---	952.00	1150.00
Good quality workmanship	Inst	Ea	Lg	CJ	3.56	4.50	623.00	119.00	---	742.00	883.00
	Inst	Ea	Sm	CJ	5.46	2.93	664.00	183.00	---	847.00	1020.00
Average quality workmanship	Inst	Ea	Lg	CJ	2.96	5.40	521.00	99.20	---	620.20	737.00
	Inst	Ea	Sm	CJ	4.56	3.51	555.00	153.00	---	708.00	852.00

4'-0" x 3'-0" H

High quality workmanship	Inst	Ea	Lg	CJ	4.44	3.60	708.00	149.00	---	857.00	1020.00
	Inst	Ea	Sm	CJ	6.84	2.34	755.00	229.00	---	984.00	1190.00
Good quality workmanship	Inst	Ea	Lg	CJ	3.56	4.50	650.00	119.00	---	769.00	914.00
	Inst	Ea	Sm	CJ	5.46	2.93	693.00	183.00	---	876.00	1050.00
Average quality workmanship	Inst	Ea	Lg	CJ	2.96	5.40	542.00	99.20	---	641.20	762.00
	Inst	Ea	Sm	CJ	4.56	3.51	578.00	153.00	---	731.00	878.00

4'-0" x 4'-0" H

High quality workmanship	Inst	Ea	Lg	CJ	5.00	3.20	726.00	168.00	---	894.00	1070.00
	Inst	Ea	Sm	CJ	7.69	2.08	774.00	258.00	---	1032.00	1250.00
Good quality workmanship	Inst	Ea	Lg	CJ	4.00	4.00	666.00	134.00	---	800.00	954.00
	Inst	Ea	Sm	CJ	6.15	2.60	710.00	206.00	---	916.00	1110.00
Average quality workmanship	Inst	Ea	Lg	CJ	3.33	4.80	555.00	112.00	---	667.00	794.00
	Inst	Ea	Sm	CJ	5.13	3.12	592.00	172.00	---	764.00	921.00

4'-0" x 5'-0" H

High quality workmanship	Inst	Ea	Lg	CJ	5.71	2.80	779.00	191.00	---	970.00	1160.00
	Inst	Ea	Sm	CJ	8.79	1.82	830.00	295.00	---	1125.00	1370.00
Good quality workmanship	Inst	Ea	Lg	CJ	4.57	3.50	714.00	153.00	---	867.00	1040.00
	Inst	Ea	Sm	CJ	7.02	2.28	762.00	235.00	---	997.00	1210.00
Average quality workmanship	Inst	Ea	Lg	CJ	3.81	4.20	596.00	128.00	---	724.00	864.00
	Inst	Ea	Sm	CJ	5.86	2.73	635.00	196.00	---	831.00	1010.00

5'-0" x 3'-0" H

High quality workmanship	Inst	Ea	Lg	CJ	5.00	3.20	723.00	168.00	---	891.00	1070.00
	Inst	Ea	Sm	CJ	7.69	2.08	771.00	258.00	---	1029.00	1250.00
Good quality workmanship	Inst	Ea	Lg	CJ	4.00	4.00	663.00	134.00	---	797.00	950.00
	Inst	Ea	Sm	CJ	6.15	2.60	707.00	206.00	---	913.00	1100.00
Average quality workmanship	Inst	Ea	Lg	CJ	3.33	4.80	554.00	112.00	---	666.00	793.00
	Inst	Ea	Sm	CJ	5.13	3.12	590.00	172.00	---	762.00	920.00

Description	Oper	Unit	Vol	Crew Size	Man-hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
5'-0" x 3'-8" H											
High quality workmanship	Inst	Ea	Lg	CJ	5.71	2.80	767.00	191.00	---	958.00	1150.00
	Inst	Ea	Sm	CJ	8.79	1.82	818.00	295.00	---	1113.00	1350.00
Good quality workmanship	Inst	Ea	Lg	CJ	4.57	3.50	704.00	153.00	---	857.00	1020.00
	Inst	Ea	Sm	CJ	7.02	2.28	750.00	235.00	---	985.00	1190.00
Average quality workmanship	Inst	Ea	Lg	CJ	3.81	4.20	587.00	128.00	---	715.00	853.00
	Inst	Ea	Sm	CJ	5.86	2.73	626.00	196.00	---	822.00	994.00
5'-0" x 4'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	5.71	2.80	779.00	191.00	---	970.00	1160.00
	Inst	Ea	Sm	CJ	8.79	1.82	830.00	295.00	---	1125.00	1370.00
Good quality workmanship	Inst	Ea	Lg	CJ	4.57	3.50	714.00	153.00	---	867.00	1040.00
	Inst	Ea	Sm	CJ	7.02	2.28	762.00	235.00	---	997.00	1210.00
Average quality workmanship	Inst	Ea	Lg	CJ	3.81	4.20	596.00	128.00	---	724.00	864.00
	Inst	Ea	Sm	CJ	5.86	2.73	635.00	196.00	---	831.00	1010.00
5'-0" x 5'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	6.67	2.40	848.00	224.00	---	1072.00	1290.00
	Inst	Ea	Sm	CJ	10.3	1.56	904.00	345.00	---	1249.00	1520.00
Good quality workmanship	Inst	Ea	Lg	CJ	5.33	3.00	777.00	179.00	---	956.00	1140.00
	Inst	Ea	Sm	CJ	8.21	1.95	829.00	275.00	---	1104.00	1340.00
Average quality workmanship	Inst	Ea	Lg	CJ	4.44	3.60	648.00	149.00	---	797.00	953.00
	Inst	Ea	Sm	CJ	6.84	2.34	691.00	229.00	---	920.00	1120.00
6'-0" x 3'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	5.71	2.80	773.00	191.00	---	964.00	1160.00
	Inst	Ea	Sm	CJ	8.79	1.82	824.00	295.00	---	1119.00	1360.00
Good quality workmanship	Inst	Ea	Lg	CJ	4.57	3.50	708.00	153.00	---	861.00	1030.00
	Inst	Ea	Sm	CJ	7.02	2.28	755.00	235.00	---	990.00	1200.00
Average quality workmanship	Inst	Ea	Lg	CJ	3.81	4.20	591.00	128.00	---	719.00	858.00
	Inst	Ea	Sm	CJ	5.86	2.73	630.00	196.00	---	826.00	1000.00
6'-0" x 3'-8" H											
High quality workmanship	Inst	Ea	Lg	CJ	6.15	2.60	807.00	206.00	---	1013.00	1220.00
	Inst	Ea	Sm	CJ	9.47	1.69	861.00	317.00	---	1178.00	1430.00
Good quality workmanship	Inst	Ea	Lg	CJ	5.00	3.20	741.00	168.00	---	909.00	1090.00
	Inst	Ea	Sm	CJ	7.69	2.08	790.00	258.00	---	1048.00	1270.00
Average quality workmanship	Inst	Ea	Lg	CJ	4.21	3.80	618.00	141.00	---	759.00	908.00
	Inst	Ea	Sm	CJ	6.48	2.47	659.00	217.00	---	876.00	1060.00
6'-0" x 4'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	6.67	2.40	842.00	224.00	---	1066.00	1280.00
	Inst	Ea	Sm	CJ	10.3	1.56	898.00	345.00	---	1243.00	1520.00
Good quality workmanship	Inst	Ea	Lg	CJ	5.33	3.00	771.00	179.00	---	950.00	1140.00
	Inst	Ea	Sm	CJ	8.21	1.95	822.00	275.00	---	1097.00	1330.00
Average quality workmanship	Inst	Ea	Lg	CJ	4.44	3.60	644.00	149.00	---	793.00	948.00
	Inst	Ea	Sm	CJ	6.84	2.34	686.00	229.00	---	915.00	1110.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
Dual glazed											
3'-0" x 3'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	4.44	3.60	857.00	149.00	---	1006.00	1190.00
	Inst	Ea	Sm	CJ	6.84	2.34	914.00	229.00	---	1143.00	1370.00
Good quality workmanship	Inst	Ea	Lg	CJ	3.56	4.50	786.00	119.00	---	905.00	1070.00
	Inst	Ea	Sm	CJ	5.46	2.93	838.00	183.00	---	1021.00	1220.00
Average quality workmanship	Inst	Ea	Lg	CJ	2.96	5.40	656.00	99.20	---	755.20	893.00
	Inst	Ea	Sm	CJ	4.56	3.51	699.00	153.00	---	852.00	1020.00
3'-0" x 4'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	4.44	3.60	944.00	149.00	---	1093.00	1290.00
	Inst	Ea	Sm	CJ	6.84	2.34	1010.00	229.00	---	1239.00	1480.00
Good quality workmanship	Inst	Ea	Lg	CJ	3.56	4.50	866.00	119.00	---	985.00	1160.00
	Inst	Ea	Sm	CJ	5.46	2.93	923.00	183.00	---	1106.00	1320.00
Average quality workmanship	Inst	Ea	Lg	CJ	2.96	5.40	722.00	99.20	---	821.20	969.00
	Inst	Ea	Sm	CJ	4.56	3.51	770.00	153.00	---	923.00	1100.00
4'-0" x 3'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	4.44	3.60	935.00	149.00	---	1084.00	1280.00
	Inst	Ea	Sm	CJ	6.84	2.34	997.00	229.00	---	1226.00	1470.00
Good quality workmanship	Inst	Ea	Lg	CJ	3.56	4.50	858.00	119.00	---	977.00	1150.00
	Inst	Ea	Sm	CJ	5.46	2.93	915.00	183.00	---	1098.00	1310.00
Average quality workmanship	Inst	Ea	Lg	CJ	2.96	5.40	716.00	99.20	---	815.20	962.00
	Inst	Ea	Sm	CJ	4.56	3.51	763.00	153.00	---	916.00	1090.00
4'-0" x 4'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	5.00	3.20	1010.00	168.00	---	1178.00	1400.00
	Inst	Ea	Sm	CJ	7.69	2.08	1080.00	258.00	---	1338.00	1600.00
Good quality workmanship	Inst	Ea	Lg	CJ	4.00	4.00	930.00	134.00	---	1064.00	1260.00
	Inst	Ea	Sm	CJ	6.15	2.60	992.00	206.00	---	1198.00	1430.00
Average quality workmanship	Inst	Ea	Lg	CJ	3.33	4.80	776.00	112.00	---	888.00	1050.00
	Inst	Ea	Sm	CJ	5.13	3.12	827.00	172.00	---	999.00	1190.00
4'-0" x 5'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	5.71	2.80	1110.00	191.00	---	1301.00	1550.00
	Inst	Ea	Sm	CJ	8.79	1.82	1190.00	295.00	---	1485.00	1780.00
Good quality workmanship	Inst	Ea	Lg	CJ	4.57	3.50	1020.00	153.00	---	1173.00	1390.00
	Inst	Ea	Sm	CJ	7.02	2.28	1090.00	235.00	---	1325.00	1580.00
Average quality workmanship	Inst	Ea	Lg	CJ	3.81	4.20	852.00	128.00	---	980.00	1160.00
	Inst	Ea	Sm	CJ	5.86	2.73	909.00	196.00	---	1105.00	1320.00
5'-0" x 3'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	5.00	3.20	1010.00	168.00	---	1178.00	1390.00
	Inst	Ea	Sm	CJ	7.69	2.08	1070.00	258.00	---	1328.00	1590.00
Good quality workmanship	Inst	Ea	Lg	CJ	4.00	4.00	921.00	134.00	---	1055.00	1250.00
	Inst	Ea	Sm	CJ	6.15	2.60	982.00	206.00	---	1188.00	1420.00
Average quality workmanship	Inst	Ea	Lg	CJ	3.33	4.80	768.00	112.00	---	880.00	1040.00
	Inst	Ea	Sm	CJ	5.13	3.12	819.00	172.00	---	991.00	1180.00

Description	Oper	Unit	Vol	Crew Size	Man-hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
5'-0" x 3'-8" H											
High quality workmanship	Inst	Ea	Lg	CJ	5.71	2.80	1070.00	191.00	---	1261.00	1500.00
	Inst	Ea	Sm	CJ	8.79	1.82	1140.00	295.00	---	1435.00	1730.00
Good quality workmanship	Inst	Ea	Lg	CJ	4.57	3.50	984.00	153.00	---	1137.00	1350.00
	Inst	Ea	Sm	CJ	7.02	2.28	1050.00	235.00	---	1285.00	1540.00
Average quality workmanship	Inst	Ea	Lg	CJ	3.81	4.20	821.00	128.00	---	949.00	1120.00
	Inst	Ea	Sm	CJ	5.86	2.73	875.00	196.00	---	1071.00	1280.00
5'-0" x 4'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	5.71	2.80	1100.00	191.00	---	1291.00	1530.00
	Inst	Ea	Sm	CJ	8.79	1.82	1170.00	295.00	---	1465.00	1760.00
Good quality workmanship	Inst	Ea	Lg	CJ	4.57	3.50	1010.00	153.00	---	1163.00	1370.00
	Inst	Ea	Sm	CJ	7.02	2.28	1070.00	235.00	---	1305.00	1560.00
Average quality workmanship	Inst	Ea	Lg	CJ	3.81	4.20	837.00	128.00	---	965.00	1140.00
	Inst	Ea	Sm	CJ	5.86	2.73	893.00	196.00	---	1089.00	1300.00
5'-0" x 5'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	6.67	2.40	1220.00	224.00	---	1444.00	1710.00
	Inst	Ea	Sm	CJ	10.3	1.56	1300.00	345.00	---	1645.00	1980.00
Good quality workmanship	Inst	Ea	Lg	CJ	5.33	3.00	1120.00	179.00	---	1299.00	1540.00
	Inst	Ea	Sm	CJ	8.21	1.95	1190.00	275.00	---	1465.00	1760.00
Average quality workmanship	Inst	Ea	Lg	CJ	4.44	3.60	932.00	149.00	---	1081.00	1280.00
	Inst	Ea	Sm	CJ	6.84	2.34	994.00	229.00	---	1223.00	1460.00
6'-0" x 3'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	5.71	2.80	1100.00	191.00	---	1291.00	1530.00
	Inst	Ea	Sm	CJ	8.79	1.82	1170.00	295.00	---	1465.00	1760.00
Good quality workmanship	Inst	Ea	Lg	CJ	4.57	3.50	1010.00	153.00	---	1163.00	1370.00
	Inst	Ea	Sm	CJ	7.02	2.28	1070.00	235.00	---	1305.00	1560.00
Average quality workmanship	Inst	Ea	Lg	CJ	3.81	4.20	837.00	128.00	---	965.00	1140.00
	Inst	Ea	Sm	CJ	5.86	2.73	893.00	196.00	---	1089.00	1300.00
6'-0" x 3'-8" H											
High quality workmanship	Inst	Ea	Lg	CJ	6.15	2.60	1160.00	206.00	---	1366.00	1620.00
	Inst	Ea	Sm	CJ	9.47	1.69	1230.00	317.00	---	1547.00	1860.00
Good quality workmanship	Inst	Ea	Lg	CJ	5.00	3.20	1060.00	168.00	---	1228.00	1450.00
	Inst	Ea	Sm	CJ	7.69	2.08	1130.00	258.00	---	1388.00	1660.00
Average quality workmanship	Inst	Ea	Lg	CJ	4.21	3.80	884.00	141.00	---	1025.00	1210.00
	Inst	Ea	Sm	CJ	6.48	2.47	942.00	217.00	---	1159.00	1390.00
6'-0" x 4'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	6.67	2.40	1220.00	224.00	---	1444.00	1710.00
	Inst	Ea	Sm	CJ	10.3	1.56	1300.00	345.00	---	1645.00	1970.00
Good quality workmanship	Inst	Ea	Lg	CJ	5.33	3.00	1110.00	179.00	---	1289.00	1530.00
	Inst	Ea	Sm	CJ	8.21	1.95	1190.00	275.00	---	1465.00	1750.00
Average quality workmanship	Inst	Ea	Lg	CJ	4.44	3.60	929.00	149.00	---	1078.00	1280.00
	Inst	Ea	Sm	CJ	6.84	2.34	990.00	229.00	---	1219.00	1460.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
1 fixed lite, 1 sliding lite											
Single glazed											
3'-0" x 3'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	4.44	3.60	798.00	149.00	---	947.00	1130.00
	Inst	Ea	Sm	CJ	6.84	2.34	851.00	229.00	---	1080.00	1300.00
Good quality workmanship	Inst	Ea	Lg	CJ	3.56	4.50	732.00	119.00	---	851.00	1010.00
	Inst	Ea	Sm	CJ	5.46	2.93	781.00	183.00	---	964.00	1150.00
Average quality workmanship	Inst	Ea	Lg	CJ	2.96	5.40	611.00	99.20	---	710.20	841.00
	Inst	Ea	Sm	CJ	4.56	3.51	651.00	153.00	---	804.00	963.00
3'-0" x 4'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	4.44	3.60	878.00	149.00	---	1027.00	1220.00
	Inst	Ea	Sm	CJ	6.84	2.34	936.00	229.00	---	1165.00	1400.00
Good quality workmanship	Inst	Ea	Lg	CJ	3.56	4.50	804.00	119.00	---	923.00	1090.00
	Inst	Ea	Sm	CJ	5.46	2.93	858.00	183.00	---	1041.00	1240.00
Average quality workmanship	Inst	Ea	Lg	CJ	2.96	5.40	671.00	99.20	---	770.20	910.00
	Inst	Ea	Sm	CJ	4.56	3.51	715.00	153.00	---	868.00	1040.00
4'-0" x 3'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	4.44	3.60	858.00	149.00	---	1007.00	1190.00
	Inst	Ea	Sm	CJ	6.84	2.34	915.00	229.00	---	1144.00	1370.00
Good quality workmanship	Inst	Ea	Lg	CJ	3.56	4.50	786.00	119.00	---	905.00	1070.00
	Inst	Ea	Sm	CJ	5.46	2.93	838.00	183.00	---	1021.00	1220.00
Average quality workmanship	Inst	Ea	Lg	CJ	2.96	5.40	656.00	99.20	---	755.20	893.00
	Inst	Ea	Sm	CJ	4.56	3.51	699.00	153.00	---	852.00	1020.00
4'-0" x 4'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	5.00	3.20	929.00	168.00	---	1097.00	1300.00
	Inst	Ea	Sm	CJ	7.69	2.08	990.00	258.00	---	1248.00	1500.00
Good quality workmanship	Inst	Ea	Lg	CJ	4.00	4.00	854.00	134.00	---	988.00	1170.00
	Inst	Ea	Sm	CJ	6.15	2.60	910.00	206.00	---	1116.00	1340.00
Average quality workmanship	Inst	Ea	Lg	CJ	3.33	4.80	711.00	112.00	---	823.00	974.00
	Inst	Ea	Sm	CJ	5.13	3.12	758.00	172.00	---	930.00	1110.00
4'-0" x 5'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	5.71	2.80	1020.00	191.00	---	1211.00	1440.00
	Inst	Ea	Sm	CJ	8.79	1.82	1090.00	295.00	---	1385.00	1670.00
Good quality workmanship	Inst	Ea	Lg	CJ	4.57	3.50	938.00	153.00	---	1091.00	1290.00
	Inst	Ea	Sm	CJ	7.02	2.28	1000.00	235.00	---	1235.00	1480.00
Average quality workmanship	Inst	Ea	Lg	CJ	3.81	4.20	782.00	128.00	---	910.00	1080.00
	Inst	Ea	Sm	CJ	5.86	2.73	834.00	196.00	---	1030.00	1230.00
5'-0" x 3'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	5.00	3.20	917.00	168.00	---	1085.00	1290.00
	Inst	Ea	Sm	CJ	7.69	2.08	978.00	258.00	---	1236.00	1480.00
Good quality workmanship	Inst	Ea	Lg	CJ	4.00	4.00	840.00	134.00	---	974.00	1150.00
	Inst	Ea	Sm	CJ	6.15	2.60	896.00	206.00	---	1102.00	1320.00
Average quality workmanship	Inst	Ea	Lg	CJ	3.33	4.80	701.00	112.00	---	813.00	962.00
	Inst	Ea	Sm	CJ	5.13	3.12	747.00	172.00	---	919.00	1100.00

Description	Oper	Unit	Vol	Crew Size	Man- hours per Unit	Crew Output per Day	Avg Mat'l Unit Cost	Avg Labor Unit Cost	Avg Equip Unit Cost	Avg Total Unit Cost	Avg Price Incl O&P
5'-0" x 3'-8" H											
High quality workmanship	Inst	Ea	Lg	CJ	5.71	2.80	983.00	191.00	---	1174.00	1400.00
	Inst	Ea	Sm	CJ	8.79	1.82	1050.00	295.00	---	1345.00	1620.00
Good quality workmanship	Inst	Ea	Lg	CJ	4.57	3.50	902.00	153.00	---	1055.00	1250.00
	Inst	Ea	Sm	CJ	7.02	2.28	962.00	235.00	---	1197.00	1440.00
Average quality workmanship	Inst	Ea	Lg	CJ	3.81	4.20	752.00	128.00	---	880.00	1040.00
	Inst	Ea	Sm	CJ	5.86	2.73	802.00	196.00	---	998.00	1200.00
5'-0" x 4'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	5.71	2.80	993.00	191.00	---	1184.00	1410.00
	Inst	Ea	Sm	CJ	8.79	1.82	1060.00	295.00	---	1355.00	1630.00
Good quality workmanship	Inst	Ea	Lg	CJ	4.57	3.50	911.00	153.00	---	1064.00	1260.00
	Inst	Ea	Sm	CJ	7.02	2.28	971.00	235.00	---	1206.00	1450.00
Average quality workmanship	Inst	Ea	Lg	CJ	3.81	4.20	759.00	128.00	---	887.00	1050.00
	Inst	Ea	Sm	CJ	5.86	2.73	810.00	196.00	---	1006.00	1210.00
5'-0" x 5'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	6.67	2.40	1120.00	224.00	---	1344.00	1600.00
	Inst	Ea	Sm	CJ	10.3	1.56	1190.00	345.00	---	1535.00	1850.00
Good quality workmanship	Inst	Ea	Lg	CJ	5.33	3.00	1020.00	179.00	---	1199.00	1430.00
	Inst	Ea	Sm	CJ	8.21	1.95	1090.00	275.00	---	1365.00	1640.00
Average quality workmanship	Inst	Ea	Lg	CJ	4.44	3.60	828.00	149.00	---	977.00	1160.00
	Inst	Ea	Sm	CJ	6.84	2.34	883.00	229.00	---	1112.00	1340.00
6'-0" x 3'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	5.71	2.80	963.00	191.00	---	1154.00	1380.00
	Inst	Ea	Sm	CJ	8.79	1.82	1030.00	295.00	---	1325.00	1590.00
Good quality workmanship	Inst	Ea	Lg	CJ	4.57	3.50	884.00	153.00	---	1037.00	1230.00
	Inst	Ea	Sm	CJ	7.02	2.28	942.00	235.00	---	1177.00	1410.00
Average quality workmanship	Inst	Ea	Lg	CJ	3.81	4.20	737.00	128.00	---	865.00	1030.00
	Inst	Ea	Sm	CJ	5.86	2.73	786.00	196.00	---	982.00	1180.00
6'-0" x 3'-8" H											
High quality workmanship	Inst	Ea	Lg	CJ	6.67	2.40	1020.00	224.00	---	1244.00	1490.00
	Inst	Ea	Sm	CJ	10.3	1.56	1090.00	345.00	---	1435.00	1740.00
Good quality workmanship	Inst	Ea	Lg	CJ	5.33	3.00	938.00	179.00	---	1117.00	1330.00
	Inst	Ea	Sm	CJ	8.21	1.95	1000.00	275.00	---	1275.00	1540.00
Average quality workmanship	Inst	Ea	Lg	CJ	4.44	3.60	782.00	149.00	---	931.00	1110.00
	Inst	Ea	Sm	CJ	6.84	2.34	834.00	229.00	---	1063.00	1280.00
6'-0" x 4'-0" H											
High quality workmanship	Inst	Ea	Lg	CJ	6.67	2.40	1050.00	224.00	---	1274.00	1520.00
	Inst	Ea	Sm	CJ	10.3	1.56	1120.00	345.00	---	1465.00	1770.00
Good quality workmanship	Inst	Ea	Lg	CJ	5.33	3.00	960.00	179.00	---	1139.00	1350.00
	Inst	Ea	Sm	CJ	8.21	1.95	1020.00	275.00	---	1295.00	1560.00
Average quality workmanship	Inst	Ea	Lg	CJ	4.44	3.60	801.00	149.00	---	950.00	1130.00
	Inst	Ea	Sm	CJ	6.84	2.34	854.00	229.00	---	1083.00	1300.00

Wiring. See Electrical, page 156

Index

A

- A.O. Smith water heaters...454-459
- Abbreviations used.....20
- Access doors.....375
- Accessibility
 - site.....6
 - workplace.....5
- Accessories
 - air conditioning duct.....29-31
 - bath.....39-43
 - boiler.....264
 - fiberglass panels.....169
 - fireplaces.....171
- Accordion doors.....93
- Accurate estimating methods.....5
- Acoustical tile/panels
 - adhesive cost.....21
 - adhesive set.....22
 - ceiling tile.....22-23
 - demolition.....129
 - dimensions.....21
 - estimating technique.....21
 - furring strips.....23-24
 - installation.....21
 - painting.....331
 - patterns.....23-24
 - stapled/no grid.....23
 - suspended ceiling systems.....439-440
 - wall tile.....22-23
- Acrylic
 - bathtubs.....49-52
 - diffusers.....278
 - dome skylights.....427-428
 - flooring, wood
 - parquet blocks.....261
- Adhesives.....24-27
 - ceiling panels.....22
 - ceramic tile.....106
 - drywall panels.....26-27
 - floor panels.....23
 - gypsum drywall panels.....26-27
 - hardboard wall panels.....27
 - plastic wall panels.....27
 - polystyrene wall panels.....25-26
 - polyurethane foam
 - wall panels.....25-26
 - subfloor.....24
 - wall panels.....25-27
- Adjustable roof flashing.....451
- Adjuster, insurance.....5
- Adobe, brick.....290
- Aggregate, ready mix concrete.....103-105
- Air conditioning systems
 - diffusers.....28
 - ductwork.....29-31
 - fans.....32
 - system components.....28
 - system units, complete.....35-37
 - ventilation, residential.....33-34
- Air conditioning units
 - fan coil.....35
 - heat pumps.....36
 - roof top.....36
 - window.....37
- Air extractors, A/C duct.....30
- Air return, aluminum ventilation grilles.....34-35
- Air supply registers.....34-35
- Air tool operator
 - crew rates.....15
 - wages.....11
- Air tools, demolition.....115-116
- Alarm bell.....157
- Aluminum
 - carport, freestanding.....75
 - columns.....94
 - cupola roof.....113
 - diffusers.....28
 - ductwork, A/C.....29
 - exterior shutters.....387
 - garage doors.....221
 - grilles, ventilation.....34
 - gutters and downspouts.....255
 - kickplates.....134
 - roofing.....359
 - roofing, demolition.....123
 - sash, window glass.....229
 - screen doors.....150
 - screening, wire, door.....150
 - shower and tub doors.....376-380
 - sliding glass
 - door.....144-145, 378-380
 - sliding glass door,
 - demolition.....128
 - thresholds.....135
 - weathervanes.....113
 - windows.....463-471
 - windows, demolition.....126-127
 - wire screening, door.....150
- Aluminum siding
 - clapboard.....393
 - corrugated.....393
 - demolition.....393
 - dimensions.....390
 - estimating.....390
 - installation.....390
 - panels.....393
 - shingles.....393
- American Standard Products
 - Americast
 - fixtures.....381-382, 418-420
 - bathtubs.....47-52
 - bidets.....447-448
 - countertop bathroom
 - sinks.....402-404
 - kitchen sinks.....418-420
 - pedestal sinks.....405-407
 - shower bases.....381-382
 - sinks.....418-420
 - toilets.....443
 - wall hung bathroom
 - sinks.....411-412
 - Americast
 - shower bases.....381-382
 - sinks.....418-420
- Angle bar, bathroom.....39, 40
- Anti-algae caulking.....82
- Antique bathtubs.....46-47
- Apron mold.....308
- Aqua Glass shower surround.....383
- Arch roof, calculating paint coverage.....327
- Architectural, cement, white.....105
- Archway, entrance.....160
- Area modification factors
 - calculating.....12
 - Canada.....14
 - U.S.....12
- Armstrong sheet vinyl.....352, 354
- Ash, V-grooved, paneling.....341
- Ash-sen, paneling.....341
- Ashlar pattern, tile installation.....23
- Asphalt shingles.....359-363
 - demolition.....124, 359
- Asphalt tile flooring.....351, 353
- Assembled package
 - door units.....137
- Astragal molding
 - oak.....316
 - pine.....304
- Attic
 - access doors.....375
 - ventilation.....33-34
- Average costs.....4
- Average manhours per unit.....4
- demolition.....114
- Awning windows.....472-475
- Awnings
 - aluminum.....75
 - canopies.....75-77
 - canvas.....77
 - patio.....76-77
 - roll-up.....77
 - window.....76-77
 - wood, patio.....192
- Axial flow fans.....32
- B**
- B & B casing.....299
- Back band casing.....300
- Backfilling.....161
- Backsplash
 - butcher block.....113
 - ceramic tile.....106
 - engineered stone.....111
 - Formica.....106, 108, 110
 - granite.....109
 - marble.....109
 - quartz.....110
 - Silestone.....111
 - stainless steel.....112
- Balusters, stair.....434
- Balustrade, curved oak.....437
- Band mold.....307
- Bar nosing, oak.....317
- Bar sinks.....423
- Bars, towel.....40
- Base cabinets, kitchen.....62-64
 - installation procedure.....61
- Base cap, molding/trim.....302
- Base molding
 - finger joint pine.....310-311
 - installation.....298
 - resin flexible.....319-320
 - wood bullnose round
 - corner.....324-325
- Base shoe
 - finger joint pine.....310
 - oak.....314
 - oak base round corners.....320
 - resin.....319
 - solid pine.....301-302
- Basement stairs.....435
- Bases, shower.....381-382
- Basketweave fence, redwood.....162
- Bath accessories.....39-43
 - costs explained.....38
 - demolition.....122
- Bath caulking.....81-82
 - anti-algae.....82
 - mildew resistant.....82
- Bathroom
 - sinks.....402-418
 - wall heaters.....267-268
- Bathroom angle bar.....39
- Bathroom door locksets.....134
- Bathroom heaters.....267-268
 - Ceiling Heat-A-Lite.....267
 - Ceiling Heat-A-Ventite.....267
- Bathroom wallpaper.....453
- Bathub wall, ceramic tile.....83
- Bathtubs
 - acrylic.....49-52
 - American Standard
 - Products.....47-52
 - antique.....46-47
 - cast iron.....46-47
 - demolition.....386
 - fiberglass.....44
 - free-standing.....46-47
 - Kohler Products.....46-47, 49, 52-58
 - recessed.....47
 - remove & reset.....44-45, 59
 - rough-in.....45
 - shower fixture.....45, 47, 59
 - shower tub units.....386
 - slip resistant.....48
 - steel.....48
 - sunken.....49-52
 - whirlpool.....49-58
- Batt insulation.....268-273
 - demolition.....123
- Batten siding.....391
- Batts
 - lattice.....305-306
 - pine.....399-400
 - redwood.....318
- Bead casing.....299
- Beams
 - built-up.....176-177
 - demolition.....118
 - dimension lumber.....176-179
 - glu-lam.....230-249
 - single member.....177-178
- Bedroom door locksets.....134
- Bell court casing.....310
- Benefits, employer paid.....11
- Bevel siding
 - demolition.....125
 - dimensions.....390
 - wood.....395-396
- Bi-folding closet doors.....86-88
- Bidets.....442, 447-448
- Birch
 - blinds.....388
 - doors.....147-150
 - fire doors.....147
 - paneling.....342
 - shutters.....388
- Blender, kitchen.....172
- Blinds, exterior
 - birch.....388
 - Cellwood.....389
 - door.....387
 - pine.....387
 - western hemlock.....388
- Block flooring, hardwood.....260
- Block, concrete
 - demolition.....290
 - dimensions.....282
 - exterior walls.....292
 - fences.....294-295
 - foundations.....290-291
 - heavyweight.....291
 - lightweight.....291

partitions.....	293-294	Butyl caulk.....	80	elastomeric.....	82	Chimney, vent.....	449-451
retaining walls.....	290-291	BX cable.....	156	gun.....	82	Chimneys	
slump.....	295-296	Bypassing closet doors.....	89-92	latex.....	80	brick.....	284-285
walls.....	290-291	C		mildew resistant.....	82	demolition.....	284-285
walls, insulating.....	275	Cabinet crown mold.....	308	multi-purpose.....	80	factory built.....	170
Block, glass.....	297	Cabinetry.....	62-74	oil base.....	81	flashing.....	372
Blocking, demolition.....	179-180	Cabinets, kitchen.....	62-72	silicone.....	81	Chrome bath accessories.....	38
Board and batten siding		demolition.....	122	Cavity walls, insulating.....	274-275	Circline lighting fixtures.....	278
aluminum.....	390	description.....	60	CDX plywood sheathing.....	215-216	Circular area, paint coverage.....	327
wood.....	399-400	installation procedure.....	60	Cedar		Clam shell casing.....	309
Board fence systems.....	162-167	natural finish.....	332	fencing.....	162-164	Clapboard siding	
Board sheathing		painting.....	332	roofing.....	367-371	aluminum.....	393
demolition.....	215-216	quality of.....	60	siding.....	396	demolition.....	123
subfloor.....	217	Cabinets, medicine.....	41-43	Ceiling		Claw-foot bathtubs.....	46
wall.....	215	Cabinets, vanity.....	72-74	fans.....	32	Clay tile roofing.....	359-363
Board siding.....	399	Cable, service entrance.....	155	heat.....	267	demolition.....	124
demolition.....	125	Calculating		joists.....	185	Clay tile, shapes and sizes.....	283
Boilers		area modification factors.....	12	molding.....	298	Clean-up center, kitchen.....	60
accessories.....	264	overhead expenses.....	327	panels.....	22-23	Cleaning.....	328-329
conversion accessories.....	264	paint coverage.....	6	registers, air supply.....	34	Cleaning, paint preparation	
electric fired.....	261	total hourly cost.....	11	tiles.....	22-23	exteriors.....	334-335
gas fired.....	262-263	Calgon water softeners.....	462-463	Ceiling applications		interiors.....	328-329
hot water.....	261-264	Cambridge casing.....	310	drywall.....	153	Clients.....	7
oil fired.....	263-264	Canada.....	14	drywall adhesive.....	26	communication with.....	7
steam.....	261-264	adjusting factors.....	12	paint.....	330-332	evaluating.....	7
Bolted ledgers.....	191	area modification factors.....	14	plaster lath.....	345	Closet door systems.....	86-94
Bottom plates.....	192	Canopies.....	75-77	wallpaper.....	453	accordian.....	93
Box stairs.....	435-436	aluminum.....	75-77	Ceiling Heat-A-Ventile.....		bi-folding.....	86-88
Box-type rain gutter.....	255	canvass.....	77	bathroom heaters.....	267	bypassing.....	89-92
Bracing.....	180	carport.....	75	Ceiling light fixtures		demolition, with track.....	126
demolition.....	118	door.....	75-76	indoor.....	278-279	hardware.....	93
Brass kickplates.....	134	roll-up.....	77	outdoor.....	280	mirrored.....	91-92
Brick		window.....	76-77	Ceiling systems, suspended.....	438	prefinished.....	88
adobe.....	290	Canvas awnings.....	77	demolition.....	438	sliding.....	89-92
chimneys.....	284-285	Cap molding.....	304	grid.....	438	track and hardware.....	93
columns.....	285-288	Cape Cod molding		tile/panels, acoustical.....	22-23	unfinished.....	86-88
concrete slump.....	296	base & shoe, pine.....	301	Ceiling/wall tile		Closets	
demolition.....	116	base, oak.....	314	demolition.....	22	kitchen utility.....	64
dimensions.....	282	base, pine.....	311	stapled.....	23	mirrored.....	91-92
mold, redwood.....	318	casing, oak.....	313-314	Cellwood shutters.....	389	Clothes dryer vent.....	374
paint, one coat.....	335	casing, pine.....	300	Cement		Coal-fired furnace.....	266
running bond.....	284-285	casing, resin.....	319	architectural.....	105	Collectors, solar.....	459-460
standard.....	284-289	Card reader, electrical.....	157	painting.....	337	mounting kits.....	460
veneer.....	288-289	Carpenter		Cement masons		Colonial molding	
walls.....	288-289	crew rates.....	15, 16, 17	crew rates.....	16	base & shoe.....	302
Bricklayer		wages.....	11	wages.....	11	casing.....	300
crew rates.....	15, 17	Carpet.....	78-79	Ceramic tile		chair rail.....	303, 325
wages.....	11	pad.....	78-79	adhesive.....	106	crown molding.....	303
Bricktender		Carport, freestanding.....	75	bathtub wall installation.....	83	spindles.....	321-323
crew rates.....	15, 17	Casement windows.....	475-486	countertops.....	84, 106	Colonial style	
wages.....	11	four ventilating lites.....	480-486	cove/base.....	84	door frames.....	132
Bridging		one ventilating lite.....	475-476	demolition.....	84	entrances.....	160
demolition.....	118	two ventilating lites.....	476-480	dimensions.....	83	shutters.....	388
solid, between joists.....	181-182	Casing		estimating techniques.....	83	Colonnades, columns.....	94-95
Bronze kickplates.....	134	finger joint pine.....	308-310	floors.....	84	Coloring, concrete.....	105
Bruner water softeners.....	462-463	oak.....	313-314	installation methods.....	83	Column headings, book,	
Builder's series spa.....	431-432	resin.....	319	mortar.....	106	explained.....	4
Building Repair Estimate.....	10	solid pine.....	299-300	wainscot cap.....	85	Columns	
Building Repair Estimate form.....	8	Cast in place concrete.....	98-105	walls.....	85	aluminum.....	94
checklist.....	6	footings.....	98-99	Chain link fence.....	164-166	brick.....	285-288
example.....	8	forming.....	100-101	Chain-drive garage door		brick, demolition.....	116
explanation.....	6, 9	foundations.....	100-101	opener.....	224	demolition.....	118
Built-in dishwashers.....	130	interior floor finishing.....	103	Chair rail molding		entrance.....	94-95
Built-in food center.....	172	reinforcing steel rods.....	102	finger joint pine.....	312	extruded aluminum.....	94
Built-up roofing		retaining walls.....	100	oak.....	316	framing.....	183
demolition.....	124	slabs.....	102	pine.....	325	framing, demolition.....	183
dimensions.....	357	Cast iron		wood bullnose round corner.....	325	wood.....	95
over concrete deck.....	365	bathroom sinks.....	415-417	Chamfer mold.....	308	Combo-fired furnaces.....	266
over existing roof.....	363-365	bathtubs.....	46-47	Change orders.....	7	Common rafters	
over wood deck.....	364	boilers.....	262, 263	Channel molding, Marlite.....	281	cut-up roofs... 196-198, 201-202	
Bullnose corner molding.....	324-325	kitchen sinks.....	420-421	Checklist, estimating.....	6	gable or hip.....	193
Burglary detection		Caulking.....	80-82	Chemical additives, concrete... 105		Communication with clients.....	7
systems.....	157-158	anti-algae.....	82	Chemical feed pumps,		Compactors, trash.....	448
Burners, boiler.....	264	bathtub.....	81-82	soft water systems.....	463	Composition shingle	
Butcher block countertops.....	113	butyl flex.....	80	Chesapeake casing.....	309	roofing.....	359-363
Button, doorbell.....	158			Chimes, doorbell.....	158		

Composition vinyl tile flooring.....352, 353	Cost basis, using to estimate.....4	Dead locks.....134	footings.....98
Compressors, air conditioning28	Cost data, accuracy.....2	Deck insulation275-276	framing118-125
Concrete	Cost difference	Decking	furring strips119
architectural.....105	new construction.....5	demolition.....192	furring strips on ceilings.....183
cast in place.....102	repair and remodeling.....5	roof.....203	gable ends204-205
chemical additives.....105	Counterspace, rule of thumb....60	wood patio.....192	garage doors.....126
coloring.....105	Countertop bathroom	Decorative circline lighting	glass.....227-229
demolition.....115-116	sinks.....415-417	fixtures.....278	glass sliding doors128
finish grading.....97	American Standard	Decorative molds.....307	glazed tile.....297
interior floor finishes.....96	Products.....402-404	Demolition	glazing.....127
labor.....96, 97	Kohler Products.....404	acoustical ceiling tile129	glu-lam beams.....230-249
painting.....335, 337	vitreous china.....402-405	adobe brick.....290	glu-lam ledgers.....253-254
pour and finish slabs.....102	Countertops.....106-113	aluminum roofing.....123	glu-lam products ... 120, 230-254
ready mix.....103-104	butcher block.....113	aluminum siding.....393	glu-lam purlins.....249-251
reinforcing97	ceramic tile.....106	asphalt shingles124, 359	glu-lam sub-purlins.....251-252
screeds.....102	concrete.....106	awning, wood.....192	gutters.....123
Concrete block	engineered stone111-112	bath accessories.....122	gypsum board.....128
demolition.....117	Formica.....106-109	bathtub.....386	gypsum panels.....128
dimensions.....282	granite.....109-110	beams118, 230-249	hardboard siding.....124
exterior walls.....292	imitation granite/marble ... 111-112	bevel siding125	hardwood flooring.....122
fences.....294-295	marble.....109-110	block, concrete.....290	headers120, 184-185
foundations.....290-291	quartz.....110-111	blocking.....179-180	insulating ceiling tile.....129
heavyweight.....291	Silestone.....111-112	board and batten.....399-400	insulating glass.....127
lightweight.....291	stainless steel.....112	board sheathing215-216	insulation.....123
partitions.....293-294	terrazzo.....112	board siding.....125	joists.....119, 185-191
retaining walls290-291	Country style Dutch	bottom plates.....192	kitchen cabinets.....122
slump.....295-296	doors.....140-141	bracing.....118, 180	labor, average output.....114
Concrete countertops.....106	Cove	brick.....116	lath.....119
Concrete footings98-99	ceramic tile.....84	brick chimneys284-285	ledgers.....120
cast in place.....98-99	linoleum.....355	brick columns.....285-287	lintels.....184-185
demolition.....115	Cove molding	bridging.....118, 181-182	loose fill.....123
dimensions.....96, 98	finger joint pine.....312	built-up hot roofing.....124	lumber.....118-122, 176
estimating techniques.....96	oak.....315	cabinets, kitchen.....122	Marlite panels.....122
installation techniques.....96	solid pine.....305	ceiling furring strips.....183	Masonite siding.....124
labor.....96	Cover, patio.....76	ceiling joists.....119	masonry.....116-117
Concrete foundations100-101	Coverage calculations,	ceiling tile.....129	medicine cabinets.....122
demolition.....115-116	painting.....327	chimneys.....284-285	molding.....122
dimensions.....96	Crew compositions.....4, 15-19	clapboard.....123	paneling.....122
estimating techniques.....96	Crew rates.....15-19	clay tile roofing.....124	particleboard.....217
installation techniques.....96	air tool operator.....15	closet doors, with track.....126	partitions, block.....293-294
interior floor finishes.....96	bricklayer.....15, 17	columns.....118, 183	patio framing.....192
labor.....96	bricktender.....15, 17	concrete block.....117	plaster.....128, 345
pour and finish slabs.....102	carpenter.....15, 16, 17	concrete block fences.....294	plastic tile.....128
Concrete steps, painting.....337	cement mason.....16	concrete block partitions... 293-294	plates.....120, 192
Concrete, cast in place.....98-105	electrician.....16, 18	concrete footings.....115	plywood.....215-217
footings.....98-99	equipment operator.....19	concrete foundations.....100	plywood sheathing.....121
forming.....102	fence erector.....16	concrete retaining walls100	posts.....118, 183
foundations.....100-101	floorlayer.....16	concrete slabs.....116	quarry tile.....297
interior floor finishes.....96	glazier.....16	corrugated roofing.....359	rafters.....120, 193-202
retaining walls100-101	lather.....17	deck, roof.....121	receptors.....381
slabs.....102	painter.....17	deck, wood.....192	resilient flooring.....129, 351
Condensing units, A/C.....26	paperhanger.....18	decking.....121, 203	retaining walls115-116
Cone, surface area,	plasterer.....17	diagonal bracing.....118, 180	rigid insulation.....123
calculating paint coverage.....327	plumber.....18, 19	diagonal let-ins.....118, 180	roof decking.....121, 203
Convertible dishwashers.....88	roofer.....18	dimensional lumber ... 118-121, 176	roof sheathing.....216
Cooking center, kitchen.....60	sheet metal worker.....19	doors.....126	roofing.....121, 123-124, 365
Copper roofs, cupola.....113	tile setter.....19	downspouts.....123	rough carpentry.....118-122
Corinthian cap, column.....94-95	Crown & cornice.....303	drop siding.....125	screen block.....296
Corner boards, siding.....392	Crown molding	drywall.....128, 154	screen doors.....126
Corner cabinets	finger joint pine.....312	entry doors.....126	shake roof.....367
kitchen.....63	oak.....315	excavation.....160-161	shakes, wood.....125
vanity.....74	solid pine.....303	exterior walls.....117	sheathing.....121, 215-217
Corner guard molding.....316	wood bullnose round corner.....325	fascia.....118, 183	sheathing, subfloor.....217
outside.....303	Cup holder.....39	fences, concrete block.....294	sheet flooring.....129, 351
Corner posts, chain link fence...166	Cupolas.....113	fences, masonry.....117	sheet metal.....123
Corner studs, applications.....175	Curtain rod, shower.....39	fiberboard sheathing.....215	sheetrock.....154
Cornice trim, solid pine.....303	Curtain-type dampers, A/C duct...31	finish carpentry.....122	shingles.....359
Coronado casing.....309	Curved stairways.....437	finishes.....128-129	shingles, wood.....125, 368
Corrugated aluminum	Cylinder, surface area,	fire doors.....126	shower bases.....381
demolition, roofing/siding123	calculating paint coverage.....327	firestops.....119	shower stalls.....383
downspouts.....255	D	floor joists.....119	shower tub units.....386
roofing.....359	Daily production, average.....4	floors, ceramic tile.....84	siding.....123-125
siding.....393	Dampers, air conditioning	floors, quarry tile.....118	slabs.....102
Corrugated fiberglass panels ...168	fire, curtain type.....31	folding closet doors.....126	sliding closet doors.....126
Cosmetic box.....41	multi-blade.....31		slump block.....295
	variable volume.....31		

slump brick.....	296	installation.....	130	Drawer base, kitchen.....	64	Enameled steel sinks, American Standard Products.....	418-420
solid bridging.....	118	sink combination.....	131	Drip edge flashing.....	374	End posts, chain link fence.....	166
steel garage doors.....	126	Disposers, garbage.....	225-226	Drip mold.....	308	Engineered stone countertops.....	111-112
stiffeners.....	119	Domes, skylight.....	425-427	Drop outlet, downspouts.....	255-257	Entrance columns.....	94-95
storm combination doors.....	126	Door		Drop siding		Entrance disconnect switch.....	155
stucco.....	128, 345	blinds, exterior.....	387	demolition.....	125	Entrance doors.....	138-139
studs.....	203-215	canopies.....	75-76	dimensions.....	391	demolition.....	126
subfloor.....	122	chimes.....	158	installation.....	391	steel.....	151-152
suspended ceilings.....	129	jamb assemblies.....	137	wood.....	397-398	Entrances.....	160
tile, clay or concrete.....	365	sill assembly.....	137	Drywall.....	153-155	Equipment operator crew rates.....	19
toilets, bidets, urinals.....	442	sills, exterior.....	132	adhesive.....	26-27	wages.....	11
top plates.....	192	switches, electrical.....	157	ceiling application.....	153	Equipment unit cost, average.....	4
trim.....	299	Door frames		ceiling panels.....	154-155	Estimate	
trusses.....	122	assembly.....	136	demolition.....	154	adjusting for area.....	12-14
underlayment.....	217	Colonial.....	132	dimensions.....	153	blank form.....	10
vanity cabinets.....	72	exterior, wood.....	132	estimating techniques.....	153	charging for.....	7
veneer, brick.....	116	Door openers, garage.....	224	fire resistant.....	155	checklist.....	6
wall furring strips.....	184	Door swing, kitchen cabinet.....	60	installation techniques.....	153	form.....	8-10
wall sheathing.....	215	Doorbell systems.....	158	painting.....	329-330	starting.....	7
wallboard.....	128	Doors		repair, paint preparation.....	329	Estimating methods.....	5
wallpaper.....	129	access.....	375	tape joints.....	154	Estimating techniques.....	5, 6
walls.....	121	accordion.....	93	wall application.....	153	acoustical tile.....	21
walls, ceramic tile.....	85	bi-folding.....	86-88	wall panels.....	154	aluminum siding.....	390
walls, masonry.....	116, 290	birch.....	147-150	water resistant.....	155	batten siding.....	391
weather protection.....	123	bypassing.....	89-92	Dual glazed windows.....	465, 468, 471	brick.....	282
windows.....	126-127	closet.....	86-94	Duct		built-up roofing.....	357
wood deck.....	192	Colonial.....	136	accessories.....	30-31	ceramic tile.....	83
wood roofing.....	124	decorative glass.....	138-139	furnaces.....	265	concrete block.....	282
wood shakes/shingles.....	367-368	demolition.....	126	Ductwork, air conditioning.....	29	concrete footings.....	96
wood siding.....	123-125	Douglas fir.....	143-144	Dumpster rental.....	114	drop siding.....	391
Demolition, with air tools.....	115-116	Dutch.....	141-142	Duolux		drywall.....	153
Description column, book.....	4	entrance.....	138-139	paneling.....	340	fiberglass shingles.....	356
Designer Group spa.....	432-433	fire doors.....	147	pegboard.....	341	finish grading.....	96
Detailed estimate.....	5	frames, interior.....	133	Dutch doors.....	141-142	forms, screeds and rods.....	96, 102-103
importance of.....	7	French.....	143-144	E		insulating tile.....	21
Detectors		French, sliding.....	145-146	Eaves, painting.....	327	mortar.....	344
fire.....	157-158	garden.....	144	Economy hardboard, paneling.....	340	painting.....	326
infrared photoelectric.....	157	hardboard.....	147-149	Elastomeric caulking.....	82	plywood siding.....	392
microwave.....	157	hollow core.....	147-148	Electric fired		quarry tile.....	282
motion.....	157	interior.....	147-150	bathroom heaters.....	267-268	roll roofing.....	356
smoke.....	157	interior systems.....	136	boilers.....	261	suspended ceilings.....	438
ultrasonic.....	157	Lauan.....	147-149	furnaces.....	265	vertical siding.....	391
Diagonal let-ins.....	180	louver.....	87	Electric water heaters, solar.....	459-461	wallpaper.....	452
Diameter casing, resin.....	319	mirrored.....	91-92	Electrical work.....	155-159	wood shingle siding.....	392
Diamond lath.....	344	package door units.....	137	alarms.....	157-158	wood shingles.....	356
metal.....	345	panel.....	140-141	burglary detection systems.....	157-158	Evaluating clients.....	7
Diffusers		passage.....	147-148	doorbell systems.....	158	Excavation.....	160-161
acrylic.....	278	prehung.....	148-150	EMT.....	156	Exit control locks.....	157
air conditioning.....	28	screen.....	150	fire alarm systems.....	158	Exterior	
Digging.....	160	shower.....	376-380	ground cable.....	156	concrete block walls.....	292
Dimension lumber		sliding.....	89-92	ground rod with clamp.....	156	corner framing.....	175
beams.....	176-179	solid core.....	148, 149-150	intercom systems.....	159	door frames.....	132
blocking.....	179-180	steel.....	151-152	meter socket.....	155	finishes, demolition.....	128-129
bracing.....	180	tub.....	376-381	motion detectors.....	157	masonry walls demolition.....	117
bridging.....	181-182	with sidelights.....	138-139	panelboard.....	156	molding.....	312
columns.....	183	wood.....	141-144	phone jack wiring.....	159	painting.....	326
demolition.....	118-122	Doors, finishing		service entrance cable.....	155	redwood molds.....	318
diagonal let-ins.....	180	exterior, paint.....	336	signal bell.....	158	shutters.....	387-389
fascia.....	183	interior, paint.....	331-332	smoke detector.....	157	sills, doors.....	132
girders.....	176-179	natural finish.....	332	television antenna wiring.....	159	wood doors.....	141-144
headers.....	184-185	Dormer louvers.....	374	weathercap.....	155	Exterior key switch, garage door opener.....	224
joists.....	185-191	Double door entrances.....	160	wiring.....	156	Electrician	
ledgers.....	191	Double hung windows.....	487-489	crew rates.....	16, 18	Extractors, air duct.....	30
lintels.....	184-185	Double roll top countertop, Formica.....	107	wages.....	11	Extruded aluminum columns.....	94
patio decking.....	192	Double top plate.....	192	EMT.....	156	Extruded polystyrene foam insulation.....	277
plates.....	192	Douglas fir		Enameled cast iron sinks		F	
posts.....	183	doors.....	143-144	bar.....	423	Fabric awning.....	77
rafters.....	193-202	fencing.....	162-164	bathroom.....	415-417	Fabricated ductwork, A/C.....	29
sheathing.....	215-217	Downspouts.....	255-257	kitchen.....	420-421	Factors, area modification.....	12
solid roof decking.....	203	demolition.....	123	Kohler Products.....	415-417	Fan coil, A/C system.....	35
studs.....	203-215	drop outlet.....	255-257	utility.....	424		
Direct drive roof ventilator.....	32	painting.....	336, 338				
Disconnect switch, entrance.....	155	Drain detail.....	38				
Dish, soap.....	39	Drainage, gutters and downspouts.....	255-257				
Dishwashers.....	130-131						
built-in.....	130						
convertible.....	131						

Fans.....32	Fixed type skylights.....425-428	blocking.....179-180	Gas valve, fireplace.....171
ceiling.....32	Fixtures, lighting.....278-280	bracing.....180	Gate posts, chain link fence.....166
in-line centrifugal.....32	Flashing.....372-373	bridging.....181-182	Gates
Fascia.....183	roof vent.....451	columns.....183	chain link fence.....166
demolition.....118	Flat Hoffco mold.....308	demolition.....118-125	split-rail.....167
Fascia bracket,	Flat panels, fiberglass.....168	diagonal let-ins.....180	Georgian crown molding.....312
downspouts.....255-257	Flat streamline molding.....301	dimension lumber.....173	Girders.....176-179
Federal unemployment	base & base shoe.....301	fascia.....183	Glass
insurance.....11	casing, pine.....299	headers.....184-185	roof windows.....431
Felt underlayment,	Flexible coated ductwork,	joists.....185-191	skywindows.....429-430
sheet flooring.....350	A/C.....30	ledgers.....191	Glass and glazing.....227-229
Fence erector	Flexible moldings, resin.....319-320	lintels.....184-185	Glass bead & screen,
crew rates.....16	Floor finishes, concrete.....96	patio decking.....192	solid pine.....304
wages.....11	Floor framing.....175	plates.....192	Glass block.....297
Fence posts	applications.....175	posts.....183	Glass break alarm switch.....158
chain link.....164, 166	joists.....185-191	rafters.....193-202	Glass doors
redwood.....162-163	joists, demolition.....119	rough carpentry.....173-220	demolition.....126, 128
split rail.....167	Floor mounted space heaters.....266	sheathing.....215-217	shower.....378-380
Fences	Flooring	solid roof decking.....203	sliding.....144-146
chain link.....164-166	ceramic tile.....83	studs.....203-215	tub.....378-381
lateral reinforcing.....295	demolition.....84, 118	Free-standing bathtubs.....46-47	Glass shelf, bathroom.....39
lightweight block.....295	hardwood.....258-261	Free-standing carport.....75	Glazed tile.....297
masonry.....295	installation, wood.....258-261	French doors.....143-144	Glazier
masonry, demolition.....117	mastic.....258	sidelites.....144, 152	crew rates.....16
split rail.....167	oak.....259-260	sliding.....145-146	wages.....11
Fiberboard sheathing.....215	panel adhesive.....24	steel.....151-152	Glazing.....227-229
Fiberglass	parquet.....260-261	French, sidelites.....144	demolition.....127
bathtubs.....56-58	quarry tile.....297	Fringe benefits.....11	Glu-lam beams.....230-249
ceiling panels.....439-440	resilient.....350-355	Front end loader,	3-1/8.....230-233
garage doors.....222	Floorlayer	excavation.....160	5-1/8.....233-238
insulation,	crew rates.....16	Fruit juicer.....172	6-3/4.....239-241
Johns-Manville.....268-273	wages.....11	Full round molding, oak.....317	8-3/4.....242-245
molding.....169	Floors, shower.....381-382	Furnaces	10-3/4.....246-249
panels.....168	Floors, wood	coal fired.....266	Glu-lam products
screening, door.....150	cleaning.....328-329	combo fired.....266	beams.....230-249
shingles.....356	finishing.....333	duct.....265	ledgers.....253-254
shower tub units.....386	natural finish.....333	gas fired.....265	purlins.....249-251
shower units.....386	painting, wood.....333	oil fired.....266	sub-purlins.....251-252
1550 molding.....300, 301	sealing.....331	wall.....267	Grab bars.....39
Filler strips, chain link.....165	stainwax.....333	wood.....266	Grading
Filter, water.....453-454	waxing.....333	Furring strips.....24, 183-184	cast in place concrete.....102
Filters, water,	Flue piping.....449-451	demolition.....119	footings.....98
soft water systems.....463	Fluorescent lighting.....278	over plaster.....24	slabs.....102
Finger joint pine	Flush doors, steel.....151-152	over wood.....24	Granite countertops.....109-110
moldings.....308-313	Flush face paneling, birch.....342		Gravel stop.....373
base.....310-311	Fluted casing.....309		Grid system,
casing.....308-310	Foam insulation.....277		suspended ceiling.....439-441
chair rail.....312	Foil-faced	Gable	Grid, ceiling.....438
cove molding.....312	insulation.....269, 271, 273	ends.....204-205, 208-212	Grilles, aluminum.....34
crown & cornice molding.....312	Folding closet doors.....86-88	rafters.....193-195, 199-200	Ground cable.....156
exterior mold.....312	demolition.....126	shakes.....367	Ground rod.....156
stool & apron.....313	Food centers,	shingles.....368-370	Grout mix.....103-104
stops.....310	small appliance.....172	Galvanized netting.....347	Guard, outside corner.....303
Finish carpentry, demolition.....122	Footings	Galvanized steel	Guide, how to use book.....4
Finish grading.....98	cast in place.....98-99	ductwork, A/C.....29	Gun applied adhesives.....24-27
Finishes	concrete.....96-98	fence posts.....164, 166	Gun, caulking.....82
concrete floor.....96	excavation for.....161	Gambrel roof, calculating paint	Gusset, framing.....173
demolition.....128-129	Forced warm	coverage.....327	Gutters and downspouts.....255-257
natural.....332-333	air systems.....265-266	Garage door openers.....224	cleaning.....334
paint.....328-339	Formica countertops.....106-109	Garage doors.....221-224	demolition.....123
wood floor.....333	cost adjustments.....108	demolition.....126	painting.....327
Finishing, concrete floor.....103	Forming, concrete	wood.....223-224	painting, 2-coats.....338
Fir, wood	footings.....98	Garbage compactors.....448	Gypsum
decking.....192	foundation.....103	Garbage disposers	adhesive.....26-27
doors, Dutch.....141-142	retaining wall.....100-101	Badger.....225	lath.....345
flooring.....259	slabs.....103	In-Sink-Erator.....225	panels, demolition.....128
shutters.....387	Foundation vents,	parts/accessories.....226	plaster.....346
Fire alarm systems.....158	galvanized.....374	remove/reset.....225-226	plasterboard.....154-155
Fire damage.....6	Foundations	Garden doors.....144	
Fire doors.....147	concrete block.....290-291	Garden windows.....493-498	
Fire-resistant drywall.....153-155	demolition.....100	one fixed lite.....493-497	
Fire-retardant fiberglass	poured from truck.....103	one fixed,	
panels.....168	Four bead casing.....299	one sliding lite.....497-498	
Fireplaces.....170-171	Framing.....173-220	Gas fired	
accessories.....171	applications.....173	boilers.....262-263	
mantels.....281	beams.....173	furnaces.....265	
Firestops, demolition.....119		space heaters.....266-267	

Hanger applications.....173	Incandescent lighting fixtures.....279-280	Interior finishes concrete floor.....96	masonry installations.....282
Hanging island cabinets.....66	Indicating panels, detection.....157	demolition.....128-129	unit cost.....4
Hardboard adhesive.....27	Indoor lighting.....278-280	painting.....326	Labor costs bath accessories.....38
demolition.....124	Infrared lamps, Heat-A-Lite.....267	painting, estimating.....326	local.....4, 12
doors, interior.....147-149	Inspection, visual.....7	Interlocking tile shingles.....359-363, 365	tile patterns.....23
installation.....340	Installation techniques acoustical tile.....21	Invoices, cataloguing.....6	Laborer crew rates.....17
paneling.....340	aluminum siding.....390	Ironworker, reinforcing, wages.....11	wages.....11
plywood paneling.....340	batten siding.....391	Island cabinets, kitchen.....65	Lacquer.....332-333
siding.....393	bevel siding.....390		Lantern post.....280
underlayment.....217	brick.....282		Lasco shower stalls.....383-385
Hardware door.....134-135	built-up roofing.....357-358	J Jacuzzi spa.....431-433	shower tub units.....386
sliding door.....89-92	ceramic tile.....83	Jamb assembly, door.....137	Lateral reinforcing concrete block.....291, 292
Hardwood flooring applications.....258-261	concrete block.....282	Jamb-type garage doors aluminum.....221	concrete block partitions.....295
block.....260	concrete footings.....96	fiberglass.....222	Latex caulking.....80
demolition.....122	dishwasher.....130	steel.....223	paint, application.....330-331
fir.....259	drop siding.....391	wood.....223	Lath and plaster.....345-346
machine sand.....259, 261	drywall.....153	Job summary file.....6	caulking.....80
maple.....259	fiberglass shingles.....356	variance report.....6	demolition.....128-129
oak.....259-260	inside/outside siding corners.....392	Jobs, estimating.....5	installation.....344
parquet.....260-261	insulating tile.....21	Johns-Manville fiberglass insulation.....268-273	Lather crew rates.....17
penetrating stainwax.....228	lath.....344	Joists bridging.....181-182	wages.....11
strip.....259	molding/trim.....298	ceiling/floor.....185-191	Lattice and battens, molding.....305-306
teak.....260	mortar.....344	demolition.....119, 185-191	redwood.....318
walnut.....260	painting.....326	framing hanger.....173	Lattice, batts.....305-306
waxing.....333	paneling.....392	insulation.....268-269, 273-274	Lauan doors.....147-149
yellow pine.....259	plaster.....344	LF of stick.....185-188	Lavatories.....402-418
Hardwood molding.....313-318	plywood siding.....392	SF of area.....188-191	Lay-down type ventilators, attic.....34
Headers.....184-185	quarry tile.....282		Lay-in suspended ceiling system.....440
demolition.....119	roll roofing.....356	K Key switch, exterior, garage door opener.....224	Layout, kitchen.....60
Heat lamp, radiant heat.....268	sheet flooring products.....350	Kickplates.....134	Lazy Susan cabinet.....64
Heat pumps.....36	stucco.....344	Kitchen counters, rule of thumb.....60	Ledger, demolition.....120
Heat-A-Lite.....267	suspended ceilings.....438	food center.....172	Ledgers.....191
Heat-A-Ventlite.....267	tile products.....350, 391	sinks.....418-422	glu-lam.....253-254
Heaters electric, bath.....267-268	wallpaper.....452	wallpaper.....453	Let-ins, diagonal bracing.....180
space heater.....266-267	wood shingle.....356	work triangle.....60	Liability insurance.....11
wall.....268	wood shingle siding.....392	Kitchen cabinets.....62-72	Light, bathroom heater.....267
wiring.....268	Installation, National Estimator.....7	base with drawers.....62-63	Light, medicine cabinet.....42
Heating systems boilers.....262-263	instruction manual.....7	corner base.....65	Lighting fixtures.....278-280
forced air.....265-266	Insulating block walls.....275	demolition.....122	fluorescent.....278
furnace.....265-267	ceiling.....22-23	description.....60	incandescent.....279
Heavyweight blocks, concrete.....291	demolition.....129	drawer base.....64	indoor.....278-280
Help, National Estimator.....7	dimensions.....21	hanging island.....66	outdoor.....280
Hemlock French doors.....143-144	Insulating tile, acoustical.....21	installation procedure.....60	porch ceiling.....280
Hermosa casing.....310	ceiling.....22-23	island base.....65	porch wall.....280
Hiders, identifying.....6	demolition.....129	oven.....67	post lantern fixture.....280
Hip rafters.....193-195, 199-200	insulation.....22-23	range.....67-68, 69-72	track lighting.....279
shakes.....367	bat or roll.....268-273	refrigerator.....69	wall fixtures.....280
shingles.....368-371	demolition.....123	sink.....67-68	Lightweight blocks, concrete.....291
Historical price data.....5	extruded polystyrene rigid foam.....277	utility closet.....64	Line posts, chain link fence.....164
collecting.....6	foil-faced.....269, 271, 273	wall.....69-72	Linoleum cove.....355
Hollow core doors.....147-148	kraft-faced.....269, 270, 272	with lazy Susan.....64	cove molding.....305
Hoods, range.....348-349	loose fill.....273-274	Knife sharpener.....172	installation.....350
Hook, robe.....39	perlite.....274	Kohler Products bar sinks.....423	Lintels.....184-185
Horizontal blocking.....179-180	rafters.....270-271	bathtubs.....46-47, 49, 52-58	Lites, panel door.....138-139
Horizontal slide aluminum windows.....466-471	rigid.....275-276	countertop bathroom sinks.....404-405	Loaded wage, total.....11
Hot air heating.....265-267	studs.....272-273	kitchen sinks.....420-422	Local labor rates.....4, 12
Hot tub, whirlpool.....431-433	unfaced.....268, 270, 272	pedestal sinks.....407-411	Locks, exit control.....157
Hot water boilers.....261-264	Vermiculite.....274	shower stalls.....386	Locksets.....134
Hourly cost, total.....11	Insurance claims adjuster.....5	sinks.....412-418	Log lighter, fireplace.....171
How to use book.....4	Insurance, liability.....11	utility sinks.....424	Loose fill insulation.....273-274
I Ice crusher.....172	Intercom systems.....159	Kraft-faced insulation.....269, 270, 272	demolition.....123
Imitation stone countertops.....111-112	Interior doors.....147-150	L Labor average output, demolition.....114	Louver closet doors.....87
In-line centrifugal fans.....32	painting.....326	concrete installation.....96-97	vents.....374
In-Sink-Erator garbage disposer.....225	Interior doors frames, wood.....133		
	types.....136		

Louvers	
natural finish.....	332
paint.....	331
Low profile	
skylights.....	427-428
skywindows.....	430
Lumber	
beams.....	176-179
blocking.....	179-180
bracing.....	180
bridging.....	181-182
columns.....	183
demolition.....	118-122, 176
diagonal let-ins.....	180
dimension.....	176
fascia.....	183
girders.....	176-179
headers.....	184-185
joists.....	185-191
ledgers.....	191
lintels.....	184-185
patio decking.....	192
plates.....	192
posts.....	183
rafters.....	193-202
sheathing.....	215-217
solid roof decking.....	203
studs.....	203-215
Lumber list.....	7
Luminous panels, ceiling...	439-440

M

Machine sand	
hardwood flooring.....	259, 261
parquetry.....	260-261
Manhours per unit, average.....	4
Mannington sheet vinyl.....	352, 354
Mantels, fireplace.....	281
Maple flooring.....	259
Marble countertops.....	109-110
Marble setter, wages.....	11
Marble tops, vanity cabinets.....	73
Marlite paneling.....	281
demolition.....	122
Mason, cement, crew rates.....	16
Masonite	
paneling, installation.....	341
siding.....	394
Masonite panels, Marlite.....	281
Masonry.....	282
adobe brick walls.....	290
block dimensions.....	282
brick.....	290
brick veneers.....	288-289
chimneys, brick.....	284-285
columns, brick.....	285-288
concrete block.....	290-295
concrete screen block.....	296
concrete slump brick.....	296
demolition.....	116-117
exterior walls, block.....	292
fences, concrete block.....	295
fences, lightweight block.....	295
floors, quarry tile.....	297
foundations,	
concrete block.....	290-291
glass block.....	297
glazed tile.....	297
painting.....	335
partitions,	
concrete block.....	293-294
quarry tile.....	297
retaining walls, block.....	290-291
textured screen block.....	296
tile.....	297
walls.....	290

Material pricing	
acoustical tile.....	21
bath accessories.....	38
Material storage.....	6
Material takeoff.....	7
Material unit cost, average.....	4
Meat grinder.....	172
Medicare tax.....	11
Medicine cabinets.....	41-43
demolition.....	122
light fixtures.....	42
recessed.....	42-43
sliding door.....	41
surface mounted.....	41-42
swing door.....	42
3-way mirror.....	41-42
Mediterranean design	
spindles.....	322-323
Membrane roofing	
demolition.....	364
over concrete deck.....	365
over existing roof.....	363
over wood deck.....	364
Metal joist hanger,	
application.....	173
Metal lath.....	345
Meter socket.....	155
Methods, estimating.....	5
Microwave detectors.....	157
Mildew resistant caulking.....	82
Milled fence boards,	
dog-eared.....	162
Millwork and trim, paint.....	331, 334
Mineral fiber ceiling panels.....	23
Mineral surfaced roll roofing.....	366
demolition.....	124
dimensions.....	356
mirror, medicine cabinet.....	41-42
Mirrors.....	43
3-way.....	41-42
tri-view.....	41-42
Mixer, kitchen.....	172
Mixing box,	
air conditioning duct.....	31
Modification factors, area.....	12
Molding and trim.....	298-325
demolition.....	122
1550 molding.....	300, 301
installation.....	298
Marlite.....	281
natural finishes.....	332
oak.....	313-318, 325
painting.....	334
pine.....	299-313, 324-325
redwood.....	318
resin flexible.....	319-320
711 molding.....	299, 301, 311, 313-314, 320
shapes.....	298
spindles.....	321-323
stops.....	310
3-step.....	299, 301
Moldings, oak	
astragal.....	316
bar nosing.....	318
base.....	314
base,	
bullnose round corner.....	325
casing.....	313-314
chair rail.....	316
cove.....	315
crown & cornice.....	315
full round.....	317
half round.....	315
hand rail.....	317
nose & cove.....	317

outside corner guard.....	316
panel cap.....	316
panel mold.....	317
quarter round.....	315
S4S.....	317
screen mold.....	316
stops.....	315
Moldings, pine.....	299-308
astragal.....	304
base.....	301-302, 310-311
base & shoe.....	301-302
cap.....	304
casing.....	299-300, 308-310
chair rail.....	303, 312
cove.....	305, 312
crown & cornice.....	303, 312
exterior mold.....	312
flat stool.....	312
glass bead & screen.....	304
half round.....	305
lattice.....	305-306
outside corner guard.....	303
panel & decorative molds.....	306
quarter round.....	304
stool & apron.....	313
stops.....	302, 310
wood bullnose round	
corner.....	324-325
Moldings, redwood	
batts.....	318
exterior molds.....	318
lattice.....	318
Moldings, resin flexible	
blocks.....	319-320
diameter casing.....	319
diameter casing, oak grain.....	320
oak grain.....	320
Moldings, spindles	
colonial design.....	321-322
Mediterranean design.....	322-323
planter design.....	321
Monterey casing.....	308-310
Mortar.....	344
ceramic tile.....	106
installation.....	344
Mosaic tile, installation.....	83
Motion detectors.....	157
Motorized dampers, A/C duct.....	31
Mullion casing.....	300
Multi-blade dampers, A/C duct.....	31
Multi-purpose caulk.....	80

N

Nailed ledgers.....	191
National Estimator program.....	7
ShowMe video.....	7
Natural finishes.....	332
stain.....	337
Natural gas fired, boiler.....	262-263
Netting, galvanized.....	347
Newels, stair.....	434
No wax sheet vinyl.....	352, 354
Non-acoustical rated	
panels.....	439, 440
Non-taxable benefits.....	11
Nose & cove mold.....	308
Nosing, roof edge	
flashing.....	372-373
Notes section.....	4
Nylon carpet.....	79

O

Oak	
bar nosing.....	317
flooring.....	259-260
paneling.....	342

paneling, flush face.....	342
stairways.....	437
Oak grain resin molding.....	320
Oak hardwood molding	
astragal.....	316
bar nosing.....	317
base.....	314
casing.....	313-314
chair rail.....	316
cove.....	315
crown & cornice.....	315
full round.....	317
half round.....	315
hand rail.....	317
nose & cove.....	317
outside corner guard.....	316
panel cap.....	316
panel mold.....	317
quarter round.....	315
S4S.....	317
screen mold.....	316
stops.....	315
Ogee stops	
oak.....	315
pine.....	302
Oil base caulking.....	81
Oil fired	
boilers.....	263-264
furnaces.....	266
One coat paint applications	
cement base paint.....	337
exterior painting.....	335-337
interior painting.....	329-332
latex.....	330-331
latex enamel.....	330-331
natural finishes.....	332-333
sealer.....	330
sizing.....	329
stain.....	337
One-flue chimneys.....	284-285
Open stairs.....	436
Openers, garage door.....	224
Operation column.....	4
OSB strand board sheathing.....	216
Outdoor lighting.....	280
Outside corner guard	
oak.....	316
solid pine.....	303
Oval streamline casing.....	299
Oven cabinets, kitchen.....	67
Overhead and profit.....	4, 6-7
Overhead expenses.....	6

P

Package door units.....	137
Pad, carpet.....	78-79
Paint	
characteristics.....	326
coverage, estimating.....	326
preparation.....	328-329
removal.....	329
Paint grade resin moldings.....	319-320
Painter	
crew rates.....	17
wages.....	11
Painting and cleaning	
exterior.....	334-335
interior.....	326
Panel	
adhesives.....	24-25
doors.....	140-141
molds.....	307
shutters, exterior.....	387
Panel siding	
aluminum.....	393
hardboard.....	395

Masonite.....394	Pine shutters387	redwood fence162	Red cedar siding
vinyl395	Pine siding.....398	split rail fence167	bevel.....396
Panelboard156	Pits, digging.....160	Prefabricated fireplaces.....170	board and batten.....399-400
Paneling	Plain siding, painting335	Prefinished	board on board.....399
demolition.....122, 340	Plane and specification sheet7	closet doors.....88	drop397
hardboard.....340	Plank and beam construction,	panel shutters389	lap396
Marlite281	roof decking.....203	Prefit casting.....308	shakes.....400
plywood.....340	Planter design spindles321	Prehung doors	shingles.....401
Panels	Plaster344-347	steel.....152	Redwood
acoustical22-23, 439, 440	ceilings346	wood.....149	cupolas.....113
adhesive set.....22-23	demolition.....128, 345	Preparation, painting328-329	decking.....192
drywall.....154-155	installation.....344	Presdwood	fence posts.....162-163
fiberglass.....168	painting.....330-331	paneling.....340	fencing.....162-164
mineral fiber23	sealer application330	pegboard.....341	lath345
painting.....331	sizing, paint preparation.....329	Price data5-6	molding.....318
Paper, wallcovering.....452	walls346	Productivity, your company7	siding.....396
Paperhanger	Plasterboard, gypsum154-155	Profit allowance4	Refrigerator cabinets69
crew rates.....18	Plasterer	Project schedule.....7	Register kit, space heaters.....267
wages.....11	crew rates.....17	Propane fired boiler.....262-263	Registers, ventilation34-35
Parquetry,	wages.....11	Property damage appraiser.....5	Reinforced concrete
hardwood flooring.....260-261	Plastic	Provincial shutters387	cast in place.....99
Particleboard	laminated countertops.....106-109	Pry bar.....114	demolition.....115-116
demolition.....217	panel adhesives27	Pumps, heat36	footing99
subfloor217	shower stalls383-385	Purlins, glu-lam.....249-251	foundations.....100-101
underlayment, installation340	Plates.....192	PVC, downspouts.....256-257	slabs.....102-103
Parting bead mold.....307	gable ends204-205		Reinforcing
Partition walls	LF of stick.....203-204		cast in place concrete102-103
concrete block.....293-294	LF of wall.....212-215		concrete97
demolition.....121	per SF of wall area.....205-212		concrete block.....291-295
framing, stud/plates.....203	walls/partitions.....212-215		masonry291-295
studs.....205-208	Plumber		Reinforcing ironworker,
Passage doors, interior147-148	crew rates.....18, 19		wages.....11
latches.....134	wages.....11		Reinforcing steel rods.....103
Paste	Plumbing accessories, costs38		Remodeling jobs, estimating5
flooring installations.....350	Plywood paneling340		Repair estimate5
wallpaper.....452	demolition.....340		example.....8-9
Patio	installation340		Residential electrical work155-156
awnings.....76	Plywood sheathing215-216		Residential jobs, estimating.....5
cover76	demolition.....121		Resilient flooring
framing192	Plywood siding		demolition.....129
Patterns, acoustical tile,	board and batten.....399-400		installed over concrete351-352
labor23	board on board.....399		sheet products350
Pedestal sinks405-411	demolition.....124		subfloor353-354
Pediments.....160	dimensions.....392		tile products.....350
Peel-off caulk.....82	installation.....392		Resin flexible molding319-320
Pegboard, installation.....341	Pocket door frame.....133		oak grain320
Pendant mounted worklights278	Police connect panel158		Retaining walls290-291
Per measure estimating5	Polish, hardwood		concrete100-101
Perlite, loose fill insulation.....274	flooring.....259-261		demolition.....100-101
Philippine mahogany paneling.....343	Polycarbonate dome		Riblath344
Phone jack, wiring159	skylights.....425-427		metal345
Photographs, before and after6	Polystyrene		Ridge or hip application,
Picture mold308	foam insulation277		roofing.....362-363
Picture windows489-492	molded foam shutters389		Rigid conduit.....156
Pilasters.....160	panels, adhesive25-26		Rigid foam insulation277
Pine moldings.....299-308	Polyurethane foam panels,		Rigid insulating board.....275-276
astragal304	adhesive25-26		Risers, stair434
base301-302, 310-311	Ponderosa pine fireplace		Robe hook39
base & shoe.....301-302	mantels.....281		Rod, shower curtain39
cap304	Pop-up drain detail38		Roll insulation268-269
casing.....299-300, 308-310	Porcelain enameled steel sink		Roll roofing365
chair rail.....303, 312	bathroom.....418		demolition.....124
cove.....305, 312	kitchen.....418-420, 422		Roll valley368-371
crown & cornice303, 312	Porch columns.....94-95		Roll-up awnings.....77
exterior mold312	Porch floors, painting		Romex cable, wiring156
flat stool.....313	cement337		Roof
glass bead & screen304	concrete339		decking.....203
half round.....305	preparation, cleaning.....334		decking, demolition121
lattice.....305-306	wood.....336		edge flashing.....374
outside corner guard303	Porch lighting.....280		edging374
panel & decorative molds.....307	Portable dishwashers.....131		flashing.....372-373
quarter round304	Portland cement, ceramic tile		flashing, adjustable451
stool & apron.....313	installation.....83		insulation275-276
stops.....302, 310	Post-formed countertops,		sheathing.....216
window stool.....306	Formica106-107		strength6
wood bullnose	Posts.....183		ventilators.....32
round corner324-325	chain link fence164, 166		vents.....374
	demolition.....118, 183		

Roof top air conditioners	36	demolition	126	Shingles		Site work, demolition labor	114
Roof windows	431	wood	150	asphalt/fiberglass	359-363	base & base shoe	301
Roofer		Screen mold, oak	316	demolition	359	casing	300
crew rates	18	Screens, painting	336	nailed	125, 359-363	Sizing application,	
wages	11	Screw-worm garage door		roofing	359-363	paint preparation	329
Roofing	356	opener	224	tile	365	Skirt board, stair	435
aluminum	359	Sealer, application		wood, roofing	368-371	Skylights	
asphalt composition		acoustical tile or panels	330	Shoe mold/trim	310, 314, 320	acrylic dome	427-428
shingles	359-363	sheetrock or plaster	330	Shower		fixed	425, 428
built-up	363-365	Sectional-type garage doors		bares/receptors	381-382	low profile	427-428
clay tile	365	aluminum	222	curtain rod	39	polycarbonate dome	425-426
composition shingles	359	fiberglass	222	demolition	381	self flashing	425-426
demolition	123-124	wood	224	fixtures	45, 59	ventilating	426-428
drip edge	374	Security, job site	6	Shower bases	381-382	Skywindows	
flashing	372-373	Self-edge countertop, Formica	108	Shower doors		insulated glass	429-430
gravel stop	373	Self-flashing skylights	425-427	hinged	376-378	low profile	429-430
membrane	363-365	Self-flashing skywindows	430	sliding	378-380	Slabs	
mineral surfaced roll	365	Selvaige roll, mineral		Shower floors,		concrete	102-103
nails, estimating need	356	surfaced roll roofing	365	slip resistant	383-385	demolition	102, 116
parapet walls	357	Service entrance cable	155	Shower modules,		Sledge hammer	114
roll roofing	365	711 molding	311	space saver	383-385	Sliding doors	
sheathing paper	371	oak base	314	Shower stalls		aluminum frame	144-145
shingles	359-363	oak casing	313	demolition	383	closet	89-92
tar usage	357	pine base & base shoe	301	nonintegral	385	French	145-146
tile	365	pine casing	299	two wall models	384	glass	144-146
top coat	357	resin casing	320	Shower tub units	386	hardware	89-92
wood shakes	367	Shake roof	367	ShowMe video	7	shower	378-380
wood shingles	368-371	demolition	367	Shutters, exterior		tub	378-381
Roofs, wood shingle	368-371	Shake siding	400	aluminum, louvered	387	Slip-resistant shower	
staining	337	demolition	125	birch	388	floors	383-385
Rosette plinth block		Shear panel, adhesives	25	Cellwood	389	Slump block,	
base & base shoe	302	Sheathing		fir	387	concrete walls	295-296
casing	300	applications, framing	174	pine	387	Slump brick, concrete walls	296
Rough carpentry, framing	173-220	demolition	121	western hemlock	388	Smith, A.O.,	
beams	176-179	paper	371	Shutters, painting	338	water heaters	454-459
blocking	179-180	roof	216	Sidelites	138-139, 144	Smoke detectors	158
bracing	180	subfloor	217	French	144, 152	Soap dish	39
bridging	181-182	wall	215	Siding	390-401	Soap holder	39
columns	183	Sheet flooring products,		aluminum	393	Social Security	11
demolition	118-125	installation	350	battens	392	Socket, meter	155
diagonal let-ins	180	Sheet metal		bevel	395	Softeners, water	462-463
dimension	176	access doors	375	board and batten	399-400	Soil type	6
fascia	183	clothes dryer vent set	374	board on board	400	Solar block, fiberglass	168
girders	176-179	demolition	123	clapboard	390	Solar collectors	459-460
headers	184-185	dormer louvers	374	demolition	123-125	mounting kits	460
joists	185-191	flashing	372-373	drop	397-398	storage tanks	461
ledgers	191	foundation vents	374	furring strips	392	Solar water heating	
lintels	184-185	gravel stop	373	hardboard	394	systems	459-461
patio decking	192	roof edging	374	Masonite	394	Solid bridging	181-182
plates	192	roof flashing	372-373	painting	337	Solid core doors	148, 149-150
posts	183	utility louvers	375	pine	398	Solid pine molding	
rafters	193-202	vents	374-375	plywood	400	astragal	304
sheathing	215-217	vertical chimney flashing	372	shake	400	base & base shoe	301-302
solid roof decking	203	Z bar flashing	372	shingles	401	cap	304
studs	203-215	Sheet metal worker		vinyl	394	casing	299-300
Rough fence board,		crew rates	19	wood	395-396	chair rail	303
squared ends	163	wages	11	Silestone countertops	111-112	cove	305
Rough-in, bathtub	45	Sheet vinyl flooring	350	Silicone caulking	81	crown & cornice	303
Running bond		demolition	129	Sill assembly, door	137	glass bead & screen	304
adobe brick	290	Sheetrock	153-155	Sill plates	192	half round	305
concrete slump brick	296	ceilings	154-155	Single top plate	192	lattice	305-306
standard brick	285-288	demolition	154	Sink cabinets		outside corner guard	303
textured screen block	296	repair, paint preparation	329	kitchen base	67-68	panel & decorative molds	307
S		sealer application	330	vanity	72-74	quarter round	304
S4S molding	305-306	sizing	329	Sinks		Solid pine, molding	299-308
oak	317	tape joints	154	bar	423	Solid roof decking	203
Sample Building Repair		walls	154-155	bathroom	402-418	Soundness of structure	6
Estimate form	8	Shelf		countertop	415-417	Space heaters	267-268
Sanding		glass, bathroom	39	kitchen	418-422	Spas, Jacuzzi	431-433
hardwood flooring	259, 261	towel supply	40	pedestal	405-411	trim kit	433
paint preparation	328-329	Shellac	332-333	undercounter	404	Special systems, electrical	157-159
Schedule, project	7	Shingle roofs, wood	368-371	utility	424	Spindle rails	323
Screeds, concrete	102	stain	337	wall hung	411-415	Spindles	
Screen doors		Shingle siding		Site accessibility	6	colonial design	321-322
aluminum frame	150	aluminum	394			Mediterranean design	322-323
		stain	337			planter design	321
		wood	401				

rails.....	323	Stucco.....	344-347	clay, roofing.....	365	Tub doors	
western hemlock.....	321-323	demolition.....	128	demolition.....	365	hinged.....	376-378
Split rail fence.....	167	exterior walls.....	347	glazed.....	297	sliding.....	381
Spotlight, indoor.....	279	installation.....	344	installation.....	350	Tub, bath	
Spring steel ductwork, A/C.....	30	painting.....	335, 338	insulating.....	21	acrylic.....	49-52
Sprung cove molding.....	305	Stucco mold.....	312	mineral fiber.....	23	antique.....	46-47
Square surface area,		redwood.....	318	painting.....	335, 338	cast iron.....	44-46, 53-56
paint coverage.....	327	Stud arrangement, framing.....	175	quarry.....	297	combination tub/shower.....	386
Stain.....	332	Studs		resilient flooring.....	351-354	demolition.....	386
Stainless steel countertops.....	112	bracing.....	180	resilient flooring,		enameled steel.....	45-46
Stainless steel sinks		demolition.....	121, 203-215	demolition.....	129	fiberglass.....	56-58
kitchen.....	422	gable ends.....	208-212	shingles.....	365	free-standing.....	44, 46-47
Kohler Products.....	423	horizontal blocking.....	179-180	Tile setter		recessed.....	47-48
Stainwax, penetrating,		insulating.....	272-273	crew rates.....	19	remove and reset.....	44-45, 59
hardwood floors.....	331	LF of stick.....	203-204	wages.....	11	rough-in.....	45
Stairs.....	434-437	LF of wall.....	212-215	Tile setter helper, wages.....	11	steel.....	44, 48
balusters.....	434	SF of wall area.....	205-212	Toilet roll holder.....	40	sunken.....	44-45, 49-52
balustrade, curved.....	437	Sub-purlins, glu-lam.....	251-252	Toilets		whirlpool.....	44-45, 47-58
basement.....	435	Subfloor		American Standard Prod.....	443	Two coat paint applications	
box-type.....	435-436	adhesive.....	24	floor mounted.....	443-446	cement base paint.....	339
carpeting.....	79	demolition.....	122	Kohler Products.....	444, 446	enamel.....	337-339
curved, oak.....	437	sheathing.....	217	one piece,		exterior painting.....	337-339
newels.....	434	Sunken bathtubs.....	44-45, 49-52	floor mounted.....	443-444	interior painting.....	333-334
nosing, mitered return.....	435	remove.....	59	remove and reset.....	442	latex.....	333-334
open type.....	436	Supply shelf, towel.....	40	wall mounted.....	446	stain.....	339
railings.....	434	Surface repair, paint		water saver models.....	442-446	Two-flue chimneys.....	284-285
risers.....	434	preparation.....	328-329	Tongue & groove roof decking.....	203	2 round edge casing.....	299
shop fabricated.....	435-437	Surface-mounted		Toothbrush holder.....	39	275 casing.....	310
skirt board.....	435	light fixtures.....	278-280	Top plates.....	192	U	
treads.....	435	Suspended ceilings		Top set base, flooring.....	355	Undercounter sinks.....	404
Stalls, shower.....	383-385	complete systems.....	439	Total hourly cost, calculating.....	11	Underlayment,	
Standard brick.....	284-289	demolition.....	129, 439	Towel		particleboard.....	340
Standard drywall.....	153	estimating materials.....	438	bars.....	40	Unemployment insurance.....	11
Stapled ceiling/wall tile.....	23	grid system components.....	441	ladders.....	40	Unfaced insulation.....	268, 270, 272
Stationary slat blinds.....	388	installation procedures.....	438	pins.....	40	Unfinished closet doors.....	86-88
Steam boilers.....	261-264	panels only.....	440	rings.....	40	Unfinished hardwood	
Steel		Suspension mounted space		shelves.....	40	plywood.....	341-343
bathtubs.....	48	heaters.....	266	Track lighting.....	279	Universal casing.....	300
boilers.....	169-170	Swing door		Track, sliding door.....	93	resin.....	319
gutters and downspouts.....	255-256	cabinets.....	42-43	Track-type garage doors		Urinals.....	442
Steel doors		shower.....	376-378	aluminum.....	222	Utility closets, kitchen.....	64
decorative, dual glazed.....	151	Switchmats.....	158	fiberglass.....	222	Utility louvers, vents.....	375
embossed raised panel.....	151	Symbols used in book.....	20	steel.....	223	Utility sinks,	
flush.....	152	System components, A/C.....	28-31	wood.....	224	Kohler Products.....	424
French.....	152	System units, A/C.....	35-37	Tractor backhoe, excavation.....	161	V	
garage doors.....	223	T		Transformer, doorbell.....	158	V-grooved paneling.....	341-343
prehung package.....	152	Tape joints, drywall.....	154	Transmitters, garage door		Valley roll.....	363-365
Steel posts,		Taping compounds, drywall.....	153	opener.....	224	Vanity cabinets.....	72-74
chain link fence.....	164, 166	Tarkett sheet vinyl.....	352, 354	Trash compactors.....	448	marble top.....	73
Steel reinforcing		Taxable fringe benefits.....	11	Treads, stair.....	435	remove and reset.....	74
concrete.....	101	Taxes, employer.....	11	Trenching.....	161	2-door.....	73
masonry.....	291-295	Teak flooring.....	260	Tri-view mirror,		Variable volume dampers,	
Steel sash, window glass.....	227-228	Techniques, estimating.....	5, 6	medicine cabinet.....	41-42	A/C duct.....	31
Steps, painting		Telephone		Triangular surface area,		Varnish.....	332-333
cement.....	337	dialer.....	158	calculating paint coverage.....	327	Veneer, brick.....	288-289
concrete.....	339	wiring.....	159	Trim		demolition.....	116
wood.....	336	Television antenna wiring.....	159	casing.....	299-300	Vent chimney.....	449-451
Stick by stick estimating.....	5	Tempered glass.....	229	demolition.....	299	damper.....	449
Stiffeners.....	180	door.....	144-145	finger joint pine.....	308-313	Ventilating skylights.....	426-428
demolition.....	119	Terrazzo countertops.....	112	oak.....	313-318	Ventilating systems.....	28-31
Stile and rail raised		Terrazzo setter, wages.....	11	oak grain resin.....	320	Ventilation.....	449-451
panel doors.....	140-141	Thermostat wiring.....	159	painting.....	331, 333	residential.....	33-34
Stone mason, wages.....	11	3-step molding		redwood.....	318	Ventilators	
Stool & apron mold.....	313	base & base shoe.....	301	solid pine.....	299-308	attic.....	33-34
Stops, molding.....	310	casing.....	299	Trim and molding.....	298-325	base.....	35
ogee, oak.....	315	364 casing		Trim kit, spa.....	433	lay-down type.....	34
ogee, pine.....	302	oak.....	313	Truck driver, wages.....	11	roof.....	32-33
rounded edge, oak.....	315	pine.....	300	Truss		round top.....	451
Storm windows, painting.....	336	resin.....	320	construction, W-type.....	173	wall type.....	33
Streamline molding.....	301	Thresholds		demolition.....	122	Vents.....	374-375
casing, oak.....	313	aluminum.....	135	shop fabricated,		access doors.....	375
Strip flooring,		oak.....	133	wood.....	218-220	attic access.....	375
installation.....	258-259	wood.....	133	Tub caulking.....	81-82	clothes dryer.....	374
Strip lighting.....	278	Tile		anti-algae.....	82	dormer louvers.....	374
Structural soundness.....	6	acoustical treatment.....	22-23	mildew resistant.....	82		
		ceramic.....	83-85, 106				

foundation	374	Wallpaper	452-453	vertical slide	463-466	dimension	118-125
louver	374-375	demolition	129	wood	472-498	fascia	183
utility louver	375	Walls		Wire lath	347	girders	176-179
Vermiculite loose fill		acoustical tile	22-23	Wiring		hanger, joist	173
insulation	274	adobe brick	290	burglary detection		headers	184-185
Vertical		brick veneer	288-289	systems	157-158	joists	185-191
chimney flashing	372	cavity, insulating	274-275	doorbell systems	158	ledgers	191
dampers, A/C duct	26	cement, painting	339	electrical service	156	lintels	184-185
reinforcing, concrete block	292	ceramic tile	85	fire alarm systems	158	patio decking	192
siding, dimensions	391	ceramic tile demolition	85	food centers	172	plates	192
slide aluminum		concrete block	290-291	intercom systems	159	posts	183
windows	463-466	framing	205-208	outlets	156	rafters	193-202
Vertical crown molding,		furring strips	184	range hoods	348-349	sheathing	215-217
fiberglass	169	insulating	275-277	switches	156	solid roof decking	203
Vibrating plate compaction	161	masonry, demolition	116-117	telephone jacks	159	studs	203-215
Victorian casing, oak	314	partition	205-208	television antennas	159	Wood lath	344
Video, ShowMe	7	plaster	346	thermostat	159	Wood molding	
Vinyl		retaining	290-291	wall heaters, bathroom	268	finger joint pine	308-313
base molding	355	screen block	296	WM 374 casing	309	oak	313-318
gutters and		shower	383-385	Wood		redwood	318
downspouts	256-257	slump block	296	columns	95, 183	solid pine	299-308
sheet flooring	351-354	slump brick	296	countertops, butcher		wood bullnose round	
siding	395	stucco	347	block	113	corner	324-325
tile flooring	351-354	studs	13	cupolas	113	Wood paneling	
wallpaper	452	studs/plates	205-208	decks	192	demolition	122, 340
wallpaper, demolition	129	Walnut flooring	260	fences	162-164	hardboard	340-343
Vinyl coated mineral		Water closets	442-446	lath	345	particleboard	340
fiber tile	22-23	Water filters	453-454	patios	192	plywood	341-343
Visual inspection	7	soft water systems	463	sash, window glass	227-228	Wood roofing	
Vitreous china sinks		Water heaters		screen doors	150	accessories	371
American Standard		A.O. Smith	454-459	shutters	387-388	demolition	121, 124
Products	402-404, 411-412	accessories	461	thresholds	135	dimensions	356
bathroom	402-415	cabinets/stands	459	windows	472-498	shakes	368-371
Kohler Products	407-411, 412-415	electric	454-457	Wood doors	141-144	shingles	368-371
utility	424	gas	457-459	Dutch	141-142	Wood sheathing	
Vitreous china toilets	442-446	solar	459-461	fire, natural birch	147	applications	174
Volume control dampers,		Water softeners		frames, exterior	132	board	215-216
A/C duct	31	Bruner	462-463	French	143-144, 145-146	fiberboard	215
W		Calgon	462-463	garage doors	223-224	hardboard	217
W-truss		chemical feed pumps	463	garden	144	particleboard	217
construction methods	173	storage tanks	462	hollow core	149	plywood	215-216
shop fabricated,		water filters	463	interior	147-150	roof	216
wood	218-220	Water-resistant drywall	153-155	raised panel	142	subfloor	217
Wage rates	11	Wax, flooring	259-261	screen	150	underlayment	217
all trades	11	Weather protection,		sliding glass	145-146	wall	215
craft compositions	15-19	demolition	123	solid core	149-150	Wood siding	
Wainscot, ceramic tile	85	Weathercap	155	threshold	133	bevel	390
installation	83	Weathervanes	113	Wood flooring		board and batten	399-400
Wall cabinets, kitchen	69-72	Well cap, downspouts	256-257	applications	258-261	board on board	400
installation procedure	60	Well outlet, downspouts	256-257	block	258	demolition	125
Wall heaters		Western hemlock		cleaning	328-329	dimensions	392
bathroom	268	shutters	388	finishing	333	drop	397-398
furnace	268	spindles	321-323	fir	259	estimating	390
recessed	268	Whirlpool bath	44-45, 47-58	maple	259	installation	390
space heaters	266-267	spa	431-433	natural finish	333	plywood	400
Wall hung bathroom sinks		White cement	105	oak	259-260	shakes	400
American Standard		Window		painting, wood	334	shingle siding	392, 401
Products	411-412	molding, stool	306	parquet	260-261	vertical	399-400
Kohler Products	412-415	painting	338	sealing	331	Wood steps, painting	336
Wall insulation	275-277	painting, finishing	332-333	stainwax	331	Woodburning fireplaces	170
demolition	123	repair/reputty	335	strip	258	Work triangle, kitchen	60
Wall lighting fixtures	280	unit air conditioners	37	teak	260	Workers' compensation	11
Wall molding, ceiling grid		Windows	463-498	walnut	260	Workplace accessibility	5
systems	441	aluminum	463-471	waxing	333	X, Y, Z	
Wall mounted urinals	447-448	awning	472-475	yellow pine	259	X-type bridging	181
Wall outlets, wiring	156	casement	475-486	Wood framing		XPS rigid foam insulation	277
Wall sheathing	215	demolition	126-127	beams	176-179	Yellow pine flooring	259
adhesives	25-27	double hung	487-489	blocking	179-180	Z bar flashing	372
Wall type ventilators, attic	33	garden	493-498	bracing	180		
Wallboard		horizontal slide	466-471	bridging	181-182		
demolition	128	picture	489-492	columns	183		
drywall application	153	roof	431	demolition	176		
		sky	429-430	diagonal let-ins	180		

Practical References for Builders

Renovating & Restyling Older Homes

Any builder can turn a run-down old house into a showcase of perfection — if the customer has unlimited funds to spend. Unfortunately, most customers are on a tight budget. They usually want more improvements than they can afford — and they expect you to deliver. This book shows how to add economical improvements that can increase the property value by two, five or even ten times the cost of the remodel. Sound impossible? Here you'll find the secrets of a builder who has been putting these techniques to work on Victorian and Craftsman-style houses for twenty years. You'll see what to repair, what to replace and what to leave, so you can remodel or restyle older homes for the least amount of money and the greatest increase in value. **416 pages, 8½ x 11, \$33.50**

CD Estimator

CD Estimator (for Windows™) puts at your fingertips over 135,000 construction costs for new construction, remodeling, renovation & insurance repair, home improvement, framing & finish carpentry, electrical, concrete & masonry, painting, and plumbing & HVAC. Quarterly cost updates are available at no charge on the Internet. You'll also have the National Estimator program — a stand-alone estimating program for Windows™ that Remodeling magazine called a "computer wiz," and *Job Cost Wizard*, a program that lets you export your estimates to QuickBooks Pro for actual job costing. A 60-minute interactive video teaches you how to use this CD-ROM to estimate construction costs. And to top it off, to help you create professional-looking estimates, the disk includes over 40 construction estimating and bidding forms. **CD Estimator is \$133.50**

National Renovation & Insurance Repair Estimator



Current prices in dollars and cents for hard-to-find items needed on most insurance, repair, remodeling, and renovation jobs. All price items include labor, material, and equipment breakouts, plus special charts that tell you exactly how these costs are calculated. Includes a free download of an electronic version of the book with *National Estimator*, a stand-alone Windows™ estimating program. An interactive multimedia video that shows how to use the software to compile renovation and repair cost estimates is free at www.craftsman-book.com.

488 pages, 8½ x 11, \$89.50. Revised annually

Also available as an eBook (PDF), \$44.75 at www.craftsman-book.com

Markup & Profit: A Contractor's Guide, Revised

In order to succeed in a construction business, you have to be able to price your jobs to cover all labor, material and overhead expenses, and make a decent profit. But calculating markup is only part of the picture. If you're going to beat the odds and stay in business — profitably, you also need to know how to write good contracts, manage your crews, work with subcontractors and collect on your work. This book covers the business basics of running a construction company, whether you're a general or specialty contractor working in remodeling, new construction or commercial work. The principles outlined here apply to all construction-related businesses. You'll find tried and tested formulas to guarantee profits, with step-by-step instructions and easy-to-follow examples to help you learn how to operate your business successfully. Includes a link to free downloads of blank forms and checklists used in this book. **336 pages, 8½ x 11, \$52.50**

Also available as an eBook (ePub, mobi for Kindle), \$39.95 at www.craftsman-book.com

Construction Forms for Contractors

This practical guide contains 78 practical forms, letters and checklists, guaranteed to help you streamline your office, organize your jobsites, gather and organize records and documents, keep a handle on your subs, reduce estimating errors, administer change orders and lien issues, monitor crew productivity, track your equipment use, and more. Includes accounting forms, change order forms, forms for customers, estimating forms, field work forms, HR forms, lien forms, office forms, bids and proposals, subcontracts, and more. All are also on the CD-ROM included, in Excel spreadsheets, as formatted Rich Text that you can fill out on your computer, and as PDFs. **360 pages, 8½ x 11, \$48.50**

eBook (PDF) also available; \$24.25 at www.craftsman-book.com

Paper Contracting: The How-To of Construction Management Contracting

Risk, and the headaches that go with it, have always been a major part of any construction project — risk of loss, negative cash flow, construction claims, regulations, excessive changes, disputes, slow pay — sometimes you'll make money, and often you won't. But many contractors today are avoiding almost all of that risk by working under a construction management contract, where they are simply a paid consultant to the owner, running the job, but leaving him the risk. This manual is the how-to of construction management contracting. You'll learn how the process works, how to get started as a CM contractor, what the job entails, how to deal with the issues that come up, when to step back, and how to get the job completed on time and on budget. Includes a link to free downloads of CM contracts legal in each state. **272 pages, 8½ x 11, \$55.50**

eBook (PDF) also available; \$27.75 at www.craftsman-book.com

National Appraisal Estimator

An Online Appraisal Estimating Service. Produce credible single-family residence appraisals — in as little as five minutes. A smart resource for appraisers using the cost approach. Reports consider all significant cost variables and both physical and functional depreciation. For more information, visit www.craftsman-book.com/national-appraisal-estimator-online-software



Insurance Replacement Estimator

Insurance underwriters demand detailed, accurate valuation data. There's no better authority on replacement cost for single-family homes than the *Insurance Replacement Estimator*. In minutes you get an insurance-to-value report showing the cost of re-construction based on your specification. You can generate and save unlimited reports. For more details, visit www.craftsman-book.com/insurance-replacement-estimator-online-software



National Home Improvement Estimator

Current labor and material prices for home improvement projects. Provides manhours for each job, recommended crew size, and the labor cost for removal and installation work. Material prices are current, with location adjustment factors and free monthly updates on the Web. Gives step-by-step instructions for the work, with helpful diagrams, and home improvement shortcuts and tips from experts. Includes a free download of an electronic version of the book, and *National Estimator*, a stand-alone Windows™ estimating program. An interactive multimedia tutorial that shows how to use the software to compile home improvement cost estimates is free at www.craftsman-book.com.

568 pages, 8½ x 11, \$88.75. Revised annually

Also available as an eBook (PDF), \$44.38 at www.craftsman-book.com



Construction Contract Writer

Relying on a "one-size-fits-all" construction contract to fit your jobs can be dangerous — almost as dangerous as a handshake agreement. *Construction Contract Writer* lets you draft a contract in minutes that precisely fits your needs and the particular job, and meets state and federal requirements. You answer a series of questions — like an interview — to construct a legal contract for each project you take on. Anticipate where disputes could arise and settle them in the contract before they happen. Include the warranty protection you intend, the payment schedule, and create subcontracts from the prime contract by just clicking a box. Includes a feedback button to an attorney on the Craftsman staff to help should you need it — *No extra charge. \$149.95*. Download *Construction Contract Writer* at <http://www.constructioncontractwriter.com>



Contractor's Guide to QuickBooks 2015

QuickBooks 2015 has many new features that simplify a building contractor's bookkeeping work. You'll wonder how you managed without them. To help you make the most of these new features, or to make getting set up with *QuickBooks* almost painless, this user-friendly manual walks you through *QuickBooks'* detailed setup procedure and explains step-by-step how to create a first-rate accounting system. You'll learn in days, rather than weeks, how to use *QuickBooks* to get your contracting business organized, with simple, fast accounting procedures. But setting up *QuickBooks* from scratch can be time-consuming. On the free download included with purchase of the book you'll find a *QuickBooks* file preconfigured for a construction company. Open it, enter your company's data, add info on your suppliers, subs and customers, and you're up and running. The setup's done for you. **280 pages, 8½ x 11, \$68.50**

See checklist for other available editions.

eBook (PDF) also available; \$34.25 at www.craftsman-book.com

eBooks also available for 2007, 2008, 2009, 2010 and 2012

Profits in Buying & Renovating Homes

Step-by-step instructions for selecting, repairing, improving, and selling highly profitable "fixer-uppers." Shows which price ranges offer the highest profit-to-investment ratios, which neighborhoods offer the best return, practical directions for repairs, and tips on dealing with buyers, sellers, and real estate agents. Shows you how to determine your profit before you buy, what "bargains" to avoid, and how to make simple, profitable, inexpensive upgrades. **304 pages, 8½ x 11, \$24.75**

Craftsman eLibrary



Craftsman's eLibrary license gives you immediate access to 60+ PDF eBooks in our bookstore for 12 full months!

You pay only one low price. \$129.99.

Visit www.craftsman-book.com for more details.

Insurance Restoration Contracting: Startup to Success

Insurance restoration — the repair of buildings damaged by water, fire, smoke, storms, vandalism and other disasters — is an exciting field of construction that provides lucrative work that's immune to economic downturns. And, with insurance companies funding the repairs, your payment is virtually guaranteed. But this type of work requires special knowledge and equipment, and that's what you'll learn about in this book. It covers fire repairs and smoke damage, water losses and specialized drying methods, mold remediation, content restoration, even damage to mobile and manufactured homes. You'll also find information on equipment needs, training classes, estimating books and software, and how restoration leads to lucrative remodeling jobs. It covers all you need to know to start and succeed as the restoration contractor that both homeowners and insurance companies call on first for the best jobs. **640 pages, 8½ x 11, \$69.00**

eBook (PDF) also available; \$34.50 at www.craftsman-book.com

Home Building Mistakes & Fixes

This is an encyclopedia of practical fixes for real-world home building and repair problems. There's never an end to "surprises" when you're in the business of building and fixing homes, yet there's little published on how to deal with construction that went wrong — where out-of-square or non-standard or jerry-rigged turns what should be a simple job into a nightmare. This manual describes jaw-dropping building mistakes that actually occurred, from disastrous misunderstandings over property lines, through basement floors leveled with an out-of-level instrument, to a house collapse when a siding crew removed the old siding. You'll learn the pitfalls the painless way, and real-world working solutions for the problems every contractor finds in a home building or repair jobsite. Includes dozens of those "surprises" and the author's step-by-step, clearly illustrated tips, tricks and workarounds for dealing with them.

384 pages, 8½ x 11, \$52.50

eBook (PDF) also available; \$26.25 at www.craftsman-book.com

Contractor's Survival Manual Revised

The "real skinny" on the down-and-dirty survival skills that no one likes to talk about — unique, unconventional ways to get through a debt crisis: what to do when the bills can't be paid, finding money and buying time, conserving income, transferring debt, setting payment priorities, cash float techniques, dealing with judgments and liens, and laying the foundation for recovery. Here you'll find out how to survive a downturn and the key things you can do to pave the road to success. Have this book as your insurance policy; when hard times come to your business it will be your guide. **336 pages, 8½ x 11, \$38.00**

eBook (PDF) also available; \$19.00 at www.craftsman-book.com

National Construction Estimator

Current building costs for residential, commercial, and industrial construction. Estimated prices for every common building material. Provides manhours, recommended crew, and gives the labor cost for installation. Includes a free download of an electronic version of the book with *National Estimator*, a stand-alone *Windows™* estimating program. An interactive multimedia video that shows how to use the software to compile construction cost estimates is free at www.craftsman-book.com.


672 pages, 8½ x 11, \$87.50. Revised annually

Also available as an eBook (PDF), \$43.75 at www.craftsman-book.com

Building Code Compliance for Contractors & Inspectors

An answer book for both contractors and building inspectors, this manual explains what it takes to pass inspections under the 2009 *International Residential Code*. It includes a code checklist for every trade, covering some of the most common reasons why inspectors reject residential work — footings, foundations, slabs, framing, sheathing, plumbing, electrical, HVAC, energy conservation and final inspection. The requirement for each item on the checklist is explained, and the code section cited so you can look it up or show it to the inspector. Knowing in advance what the inspector wants to see gives you an (almost unfair) advantage. To pass inspection, do your own pre-inspection before the inspector arrives. If your work requires getting permits and passing inspections, put this manual to work on your next job. If you're considering a career in code enforcement, this can be your guidebook. **8½ x 11, 232 pages, \$32.50**

eBook (PDF) also available; \$16.25 at www.craftsman-book.com



Estimating Home Building Costs, Revised

Estimate every phase of residential construction from site costs to the profit margin you include in your bid. Shows how to keep track of man-hours and make accurate labor cost estimates for site clearing and excavation, footings, foundations, framing and sheathing finishes, electrical, plumbing, and more. Provides and explains sample cost estimate worksheets with complete instructions for each job phase. This practical guide to estimating home construction costs has been updated with digital *Excel* estimating forms and worksheets that ensure accurate and complete estimates for your residential projects. Enter your project information on the worksheets and *Excel* automatically totals each material and labor cost from every stage of construction to a final cost estimate worksheet. Load the enclosed CD-ROM into your computer and create your own estimate as you follow along with the step-by-step techniques in this book.

336 pages, 8½ x 11, \$38.00

eBook (PDF) also available; \$19.00 at www.craftsman-book.com

Home Inspection Handbook

Every area you need to check in a home inspection — especially in older homes. Twenty complete inspection checklists: building site, foundation and basement, structural, bathrooms, chimneys and flues, ceilings, interior & exterior finishes, electrical, plumbing, HVAC, insects, vermin and decay, and more. Also includes information on starting and running your own home inspection business. **324 pages, 5½ x 8½, \$29.95**

Builder's Guide to Room Additions

How to tackle problems that are unique to additions, such as requirements for basement conversions, reinforcing ceiling joists for second-story conversions, handling problems in attic conversions, what's required for footings, foundations, and slabs, how to design the best bathroom for the space, and much more. Besides actual construction, you'll even find help in designing, planning, and estimating your room addition jobs. **352 pages, 8½ x 11, \$34.95**

Construction Spanish


Carry in your pocket over 1000 words and terms and 15 commonly-used phrases in both English to Spanish and Spanish to English for job use on residential, commercial and heavy commercial projects. If you want an inexpensive English-Spanish dictionary that fits in your shirt pocket, you should have a copy of this book. **120 pages, 3½ x 5, \$6.00**

Drafting House Plans

Here you'll find step-by-step instructions for drawing a complete set of house plans for a one-story house, an addition to an existing house, or a remodeling project. This book shows how to visualize spatial relationships, use architectural scales and symbols, sketch preliminary drawings, develop detailed floor plans and exterior elevations, and prepare a final plot plan. It even includes code-approved joist and rafter spans and how to make sure that drawings meet code requirements. **188 pages, 8½ x 11, \$34.95**

How to Succeed With Your Own Construction Business


Everything you need to start your own construction business: setting up the paperwork, finding the jobs, advertising, using contracts, dealing with lenders, estimating, scheduling, finding and keeping good employees, keeping the books, and coping with success. If you're considering starting your own construction business, all the knowledge, tips, and blank forms you need are here. **336 pages, 8½ x 11, \$28.50**



eBook (PDF) also available, \$14.25 at www.craftsman-book.com

Rough Framing Carpentry

If you'd like to make good money working outdoors as a framer, this is the book for you. Here you'll find shortcuts to laying out studs; speed cutting blocks, trimmers and plates by eye; quickly building and blocking rake walls; installing ceiling backing, ceiling joists, and truss joists; cutting and assembling hip trusses and California fills; arches and drop ceilings — all with production line procedures that save you time and help you make more money. Over 100 on-the-job photos of how to do it right and what can go wrong. **304 pages, 8½ x 11, \$26.50**



Download all of Craftsman's most popular costbooks for one low price with the Craftsman Site License. www.craftsmansitelicense.com



Craftsman Book Company
6058 Corte del Cedro
Carlsbad, CA 92011

Call me.
1-800-829-8123
Fax (760) 438-0398

In A Hurry?

We accept phone orders charged to your

☐ Visa, ☐ MasterCard, ☐ Discover or ☐ American Express

Card

Exp. date _____ CVV# _____ Initials _____

Order online <http://www.craftsman-book.com>

Free on the Internet! Download any of Craftsman's estimating costbooks for a 30-day free trial! www.craftsman-book.com

Name _____

e-mail address (for order tracking and special offers) _____

Company _____

Address _____

City/State/Zip _____

☐ This is a residence

Total enclosed _____ (In California add 7.5% tax)

*Free Media Mail shipping, within the US
when your check covers your order in full.*

Tax Deductible: Treasury regulations make these references tax deductible when used in your work. Save the canceled check or charge card statement as your receipt.

10-Day Money Back Guarantee

- | | |
|---|--|
| ☐ 34.95 Builder's Guide to Room Additions | ☐ 34.95 Drafting House Plans |
| ☐ 32.50 Building Code Compliance for Contractors & Inspectors | ☐ 38.00 Estimating Home Building Costs, Revised |
| ☐ 133.50 CD Estimator | ☐ 52.50 Home Building Mistakes & Fixes |
| ☐ 48.50 Construction Forms for Contractors | ☐ 29.95 Home Inspection Handbook |
| ☐ 6.00 Construction Spanish | ☐ 28.50 How to Succeed With Your Own Construction Business |
| ☐ 68.50 Contractor's Guide to QuickBooks 2015 | ☐ 69.00 Insurance Restoration Contracting: Startup to Success |
| ☐ 57.00 Contractor's Guide to QuickBooks Pro 2010 | ☐ 52.50 Markup & Profit: A Contractor's Guide, Revisited |
| ☐ 56.50 Contractor's Guide to QuickBooks Pro 2009 | ☐ 87.50 Natl. Construction Estimator w/FREE Natl. Est. Download |
| ☐ 54.75 Contractor's Guide to QuickBooks Pro 2008 | ☐ 88.75 Natl. Home Improvement Est. w/FREE Natl. Est. Download |
| ☐ 53.00 Contractor's Guide to QuickBooks Pro 2007 | ☐ 89.50 Natl. Renovation & Ins. Repair Est. w/FREE Natl. Est. Download |
| ☐ 49.75 Contractor's Guide to QuickBooks Pro 2005 | ☐ 55.50 Paper Contracting: The How-To of Constr Mgmt Contracting |
| ☐ 48.50 Contractor's Guide to QuickBooks Pro 2004 | ☐ 24.75 Profits in Buying & Renovating Homes |
| ☐ 47.75 Contractor's Guide to QuickBooks Pro 2003 | ☐ 33.50 Renovating & Restyling Older Homes |
| ☐ 46.50 Contractor's Guide to QuickBooks Pro 2002 | ☐ 26.50 Rough Framing Carpentry |
| ☐ 45.25 Contractor's Guide to QuickBooks Pro 2001 | ☐ 88.50 Natl. Repair & Remodeling Est. w/FREE Natl. Est. Download |
| ☐ 38.00 Contractor's Survival Manual Revised | ☐ FREE Full Color Catalog |

Prices subject to change without notice