

\$98.75



2022 NATIONAL HOME IMPROVEMENT ESTIMATOR

Edited by Ray F. Hicks

Access all of Craftsman's most popular costbooks – subscribe to National Estimator Cloud. <https://craftsman-book.com/national-estimator-cloud>



- Turn your estimate into a bid.
- Turn your bid into a contract.
- ConstructionContractWriter.com



Craftsman Book Company
6058 Corte del Cedro, Carlsbad, CA 92011

Acknowledgments

Portions of chapters 8, 9 and 15 first appeared in the book *Renovating & Restyling Older Homes* by Lawrence Dworin. Mr. Dworin served as a resource in the development of this manuscript and contributed many valuable insights from his years of experience in the industry. An order form for *Renovating & Restyling Older Homes*, and his other construction reference *Profits in Buying & Renovating Homes* appears on the final pages of this manual.

Looking for other construction reference manuals?

Craftsman has the books to fill your needs. **Call toll-free 1-800-829-8123**
or visit our Web site: <http://www.craftsman-book.com>

Cover design by: *Jennifer Johnson*
Photos: *iStock by Getty Images™*
Graphics by: *Devona Quindoy and Christal Stimpson*
Production Manager: *Christine Pray*
Layout by: *Christine Pray*
Software production: *Emma Campbell*

© 2021 Craftsman Book Company
ISBN 978-1-57218-374-2
Published September 2021 for the year 2022.

Contents

1 Pricing Home Improvement Jobs	5	7 Roofing and Flashing.....	117
This book works two ways	8	Flashing leaks	118
Craft codes and crews.....	15	Roof repairs.....	121
Area modification factors	18	Roofing material.....	122
2 Demolition	27	<i>Cost estimates</i>	
Before you begin	27	Roof repairs	129
<i>Cost estimates</i>		Composition shingles.....	130
Equipment rental	28	Built-up roofing.....	131
Sitework demolition.....	29	Roof patching	134
Building demolition	30	Wood shingle roofing.....	137
Wood framing demolition	33	Slate and tile roofing	139
3 Foundations and Slabs	37	Roof flashing.....	141
Pre-construction checklist.....	38	Gutters and downspouts.....	146
<i>Cost estimates</i>		8 Windows	147
Equipment rental	39	Window repair	149
Concrete flatwork.....	40	Sash repair	151
Concrete finishing.....	49	Counterweighted windows	152
4 Rough Carpentry.....	53	Adding or moving a window	153
Floor beams	53	<i>Cost estimates</i>	
Wood floor repairs.....	56	Window repairs.....	156
Wall framing	57	Vinyl windows	157
Roof repairs.....	58	Aluminum windows.....	161
<i>Cost estimates</i>		Wood windows	163
Framing repairs.....	62	Storm windows.....	166
Framing room additions.....	64	Window accessories.....	166
Subflooring.....	66	Window glazing.....	170
Wall and ceiling changes	70	Skylights	173
Roof framing changes	75	9 Doors	175
5 Insulation and Moisture Control	79	Door repair and replacement	175
Ceiling insulation.....	79	Adding or moving a door.....	182
Wall and floor insulation.....	80	Hanging a slab door	184
Attic and roof ventilation	83	Door terms	188
<i>Cost estimates</i>		<i>Cost estimates</i>	
Fiberglass insulation	84	Exterior doors	191
Panel insulation	85	Prehung doors.....	197
Vapor barrier.....	87	Screen and storm doors	202
Vents and louvers.....	88	Interior doors	206
Roof ventilators.....	91	Patio doors.....	214
6 Siding and Trim.....	93	Closet doors	218
Vinyl siding installation	96	Garage doors	223
Wood siding installation	97	10 Walls and Ceilings	227
Estimating procedure for siding	104	Drywall installation	228
Masonry fireplaces	104	Wood paneling.....	235
<i>Cost estimates</i>		Removing partitions	239
Siding and soffit repairs.....	105	<i>Cost estimates</i>	
Vinyl siding	107	Drywall	242
Wood board siding	108	Textured finishes for drywall	244
Texture 1-11 plywood siding.....	111	Drywall bead and tools.....	247
Fiber cement siding	112	Wall paneling	251
Aluminum siding and soffit.....	113	Suspended ceilings	255
Stucco and masonry siding.....	114	Moldings.....	259
		Partition walls	270

11 Floors and Tile 271

Wood flooring installation	272
Ceramic tile installation.....	276
<i>Cost estimates</i>	
Wood strip and plank flooring	278
Laminate plank flooring	283
Vinyl flooring.....	286
Ceramic tile.....	293
Natural stone and slate flooring	298
Ceramic field wall tile	301
Carpet	308

12 Kitchens..... 309

Kitchen cabinet standards.....	312
<i>Cost estimates</i>	
Kitchen demolition	315
Cabinets and countertops	317
Cabinet knobs, pulls and hinges	324
Sinks and faucets.....	328
Appliances	339

13 Bathrooms 345

Bathroom additions.....	345
<i>Cost estimates</i>	
Tubs, enclosures and shower stalls	352
Tub and shower faucets	360
Toilets	362
Lavatory sinks	367
Vanity cabinets and countertops	374
Bath exhaust fans.....	378
Medicine cabinets.....	382
Bathroom accessories.....	385

14 Plumbing and HVAC 391

Heating types and considerations	391
Framing for plumbing and HVAC.....	394
<i>Cost estimates</i>	
Furnace replacement.....	396
Chimney flue components	399
Water heaters	405
DWV pipe replacement.....	407

15 Electrical..... 409

Wiring residences	411
Adding outlets and switches.....	414
<i>Cost estimates</i>	
Non-metallic cable.....	417
PVC conduit and fittings.....	420
EMT conduit and fittings	422
Flex conduit and fittings	426
Rigid and IMC conduit and fittings	429
Switches and receptacles.....	434
Distribution panels	436
Lighting.....	440
Smart home electrical mgmt. system.....	444

16 Porches and Decks 445

Adding a porch.....	446
Elevated decks	448
<i>Cost estimates</i>	
Deck lumber.....	452
Alternative deck materials	454
Porch and deck stairs.....	457
Pool replastering	459
Spa replastering.....	460

17 Painting and Finishing..... 461

Paint application techniques	464
<i>Cost estimates</i>	
Labor estimates for painting.....	466
Stains and finishes	487
Wood preservatives.....	490
Interior paints	492
Exterior paints	494

18 Earthquake Damage 497

Types of damage	497
What FEMA recommends.....	499
When making alterations	504
When adding a room	505
Checking for earthquake damage.....	505
Repair of foundations and floor slabs.....	506
Framing repairs	508
Cracks in plaster and stucco	509
Fireplaces and chimneys.....	510
Mechanical, electrical, and plumbing systems.....	511
<i>Cost estimates</i>	
Foundation anchors and brackets.....	512
Cripple wall bracing	512
Hold-down anchors.....	512
Bracing a water heater	512
Framing straps and braces	512
Concrete repairs	513
Straighten a frame wall	514
Straighten a window opening	514
Plaster and stucco repair	514

19 Water Damage and


Mold Remediation 515

Building Dryout	515
Mold Remediation.....	525
<i>Cost estimates</i>	
Water extraction	529, 531
Pre-drying	529
Remove appliances	530
HVAC system cleaning	530
Carpet removal	531
Drywall repairs	532
Demolition.....	532-534
Cleanup after water extraction	534
Mold inspection and remediation protocol.....	535
Containment structure.....	536
Remove mold by abrading.....	537
Encapsulation	537
Personal protection equipment	538
Air movers, dryers and drying systems.....	539
Other dryout and mold equipment	540

Index..... 541

Pricing Home Improvement Jobs

1



Estimating home improvement costs requires specialized skills. You can't price home improvement work the same way you'd price new construction. The proportion of labor expense is greater. There's far more risk because there are far more variables and unknowns. An example will make this clear.

Hanging doors in new construction is a 1-2-3 affair. You know ahead of time exactly what's required. You built the wall, installed the frame and know each door will fit right the first time. There won't be any surprises. An experienced estimator can forecast the cost of hanging a door in a new home with a high degree of certainty.

Now let's look at the same task on a home improvement project. First, remember that you may be hanging only one door. There's no chance to improve the production rate on second or later doors. Installing this door is probably different from the last door you installed on a similar project and will be different from your next door installation.

Work starts with removing the old door. That's probably not too hard — once you break through six coats of accumulated paint on the hinges. Let's assume you work carefully and don't damage the casing or trim. The next step is to install a blind Dutchman where the original hinges were attached. If the frame's badly chewed up from years of neglect and abuse, you'll have to remove and replace the entire frame. Don't forget that the building has settled over the years. The frame has probably twisted out of plumb. More time will be needed to shim and level the frame.

Finally the door is installed and swings smoothly. But the job still isn't finished. You have to paint the door to match and will certainly have to haul away the old door and the debris.

Every home improvement cost estimate comes with dozens of chances to make an expensive mistake. Surprises are inevitable and nearly all surprises will add to the cost, not reduce the cost. Estimating new construction is a snap by comparison.

All home improvement has similar problems:

- ❖ No chance for economies of scale (mass production),
- ❖ Difficulty in removing just enough of the old,
- ❖ Work doesn't follow the normal (from the ground, up) sequence of construction,
- ❖ Difficulty adding new materials to deteriorated or nonstandard existing materials,
- ❖ The need to match designs, colors and textures,
- ❖ Covering up for another contractor's mistakes,
- ❖ Struggling to get access to the place where the work is to be done,
- ❖ Protecting adjacent surfaces and pathway to the work area,
- ❖ Initial uncertainty about how much work is needed.

If you're an experienced home improvement contractor, you understand this already. Whether experienced or not, you know full well that accurate pricing is crucial to survival in the home improvement business. Unfortunately, most home improvement specialists have far less experience in pricing their work than in getting the work done. No wonder so many home improvement companies sink into obscurity.

But it doesn't have to be that way.

The chapters that follow explain how to price each type of home improvement work. Emphasis will be on avoiding risk — pricing pitfalls that can turn any home improvement contract into a financial nightmare.

No Price Fits All Jobs

There's no single way to arrive at the correct price for home improvement work. Neither is there a single correct price for most home improvement projects. But there are both good and bad ways to estimate prices and there are good and bad prices for any proposed job. Your task as a home improvement estimator is to produce consistently good estimates on most jobs. If you're already doing that, congratulations. You don't need this book. Return it where you bought it and get a refund. But if you're not, information in the following chapters will make or save you many times what you paid for the book.

It's accepted wisdom among home improvement specialists that salespeople need authority to quote prices when closing a sale. When trying to wrap up a deal, there's no substitute for having current cost information at your fingertips. That's especially true on larger jobs where you've prepared detailed plans and a written estimate. The owner will have questions and suggestions that change the job specs. If you want to close the sale then and there, you'd better know how much to add or subtract for each change the owner wants.

Most home improvement companies authorize salespeople to quote prices from an approved list in a price book. That simplifies the salesperson's job, eliminates most major errors, and saves the owner of the company from approving every item in every estimate. In our opinion, quoting from a price book is the only way to build sales volume in the home improvement business. That means every home improvement contractor needs a good price book.

Of course, the best price book for your company would be based on your actual cost experience — work done by your crews on your jobs with materials from your dealers and installed by your subcontractors. Since every contractor uses different crews, subcontractors and suppliers, every price book should be different. And, of course, prices in the company price book should be revised regularly to reflect current labor and material costs.

Having admitted that there's no substitute for developing your own price book, we'll suggest that you not bother. Most home improvement contractors don't have the time or patience to maintain current installed prices for thousands of repair and

remodeling items. Even if you did, spending hundreds of hours a year keeping a price book current would be a waste of time. Prices for home improvement work are usually negotiated on site. There's little value in keeping a book of exact costs if you have to cut a special deal to close each sale.

Instead, we suggest that you let this manual serve as your company price book. Using the prices in this book (and included software download) will eliminate most of the common estimating mistakes. If your labor costs are higher or if your crews aren't as skilled as most tradesmen, you may have to increase the selling prices listed here to make a reasonable profit. And, of course, sometimes you're going to have a job with costs that exceed what any reasonable estimate could have predicted. This manual isn't a substitute for the exercise of good judgment. That's always your job.

Cost Plus Markup Equals Selling Price

The figures in this manual show both costs to the contractor and a recommended selling price. The difference between your cost and your selling price is your markup. Markup varies widely, far more than either material cost or labor cost. You're the final authority on markup. You decide what markup fits best — based on market conditions, your client, and the profit you feel is reasonable. Once you decide on the "right" markup, it's easy to plug that percentage into the bid, assuming you use National Estimator.

Every construction contractor needs to distinguish between "markup" and "profit." Markup is what you add to estimated labor and material costs (usually called "hard costs") to find the selling price. Profit is what you have left when all bills have been paid. The two are very different. Profit is just the frosting on the cake.

Markup is also different from "margin." Figure 1-1 shows percentages of markup for various levels of hard costs. For example, if your markup on a \$20,000 job is 50 percent, the selling price will be \$30,000. The margin on that job is 33 percent, \$10,000 divided by the selling price of \$30,000. (Note the bottom row in Figure 1-1.) Margin is what's left after hard costs are recovered, and includes profit.

Markup vs. Margin				
Hard Cost	Price at 50% Markup	Price at 70% Markup	Price at 100% Markup	Price at 150% Markup
\$50	\$75	\$85	\$100	\$125
\$100	\$150	\$170	\$200	\$250
\$200	\$300	\$340	\$400	\$500
\$300	\$450	\$510	\$600	\$750
\$400	\$600	\$680	\$800	\$1,000
\$500	\$750	\$850	\$1,000	\$1,250
\$1,000	\$1,500	\$1,700	\$2,000	\$2,500
\$2,000	\$3,000	\$3,400	\$4,000	\$5,000
\$3,000	\$4,500	\$5,100	\$6,000	\$7,500
\$4,000	\$6,000	\$6,800	\$8,000	\$10,000
\$5,000	\$7,500	\$8,500	\$10,000	\$12,500
\$6,000	\$9,000	\$10,200	\$12,000	\$15,000
\$7,000	\$10,500	\$11,900	\$14,000	\$17,500
\$8,000	\$12,000	\$13,600	\$16,000	\$20,000
\$9,000	\$13,500	\$15,300	\$18,000	\$22,500
\$10,000	\$15,000	\$17,000	\$20,000	\$25,000
\$11,000	\$16,500	\$18,700	\$22,000	\$27,500
\$12,000	\$18,000	\$20,600	\$24,000	\$30,000
\$13,000	\$19,500	\$22,100	\$26,000	\$32,500
\$14,000	\$21,000	\$23,800	\$28,000	\$35,000
\$15,000	\$22,500	\$25,500	\$30,000	\$37,500
\$16,000	\$24,000	\$27,200	\$32,000	\$40,000
\$17,000	\$25,500	\$28,900	\$34,000	\$42,500
\$18,000	\$27,000	\$30,600	\$36,000	\$45,000
\$19,000	\$28,500	\$32,300	\$38,000	\$47,500
\$20,000	\$30,000	\$34,000	\$40,000	\$50,000
\$30,000	\$45,000	\$51,000	\$60,000	\$75,000
\$40,000	\$60,000	\$68,000	\$80,000	\$100,000
\$50,000	\$75,000	\$85,000	\$100,000	\$125,000
Hard Cost	33% Margin	41% Margin	50% Margin	60% Margin

Figure 1-1

Markup (based on cost) vs. Margin (based on selling price)

Many successful home improvement contractors find they can stay in business if hard costs are 59 percent of selling price. Hard costs include material expense, subcontract costs and labor (including taxes and insurance). The other 41 percent of selling price (“margin”) compensates the sales staff, covers overhead, supervision and contingency, and should yield a modest profit. From Figure 1-1, you can see that markup on hard costs has to be 70 percent to yield a margin of 41 percent.

To put this formula to work in your home improvement company, add 70 percent to your hard costs to find the selling price. Of course, some jobs need more markup and others can get by on less. A smaller job with more risk done for a demanding client may require greater markup. A larger job done mostly by subcontractors can usually carry a smaller markup.

Home improvement contractors have all the overhead of any business: office rent, telephone, owner’s salary, office salaries, legal and accounting expense, insurance, auto and truck expense, and more. But unlike other contractors, home improvement specialists routinely deal with high risk from both the unknown and the unknowable — at least until work actually begins. Since most of what you didn’t or couldn’t anticipate will inflate your costs, you’re assuming significant risk. That’s why markups for home improvement work have to be higher than for new construction.

Naturally, competition dictates markup. If you’re not getting enough work at 70 percent markup, maybe 70 percent is too much for your area. But remember that you shouldn’t have to bid remodeling work on a level playing field. New construction usually goes to the lowest responsible bidder. A creative salesman who follows the recommendations in this book has an advantage over lowball bidders who rely on price alone to sell their services.

If you have trouble using *National Estimator*, we’ll be glad to help, and we don’t charge you for it.

Free telephone assistance is available from 8 a.m. until 5 p.m. Pacific time Monday through Friday (except holidays). Call 760-438-7828, Ext. 2.

This Book Works Two Ways




When the *National Estimator* program has been installed, click Help on the menu bar to see a list of topics that will get you up and running. Or, go online to www.craftsman-book.com and click on Support, then Tutorials, to view an interactive tutorial for *National Estimator*.

Estimates That Work Two Ways

This manual is designed for use by both the owner of a home improvement business and by company sales staff. Prices shown in this manual include both hard costs (labor and material) and a recommended selling price (usually based on 70 percent markup). Sales staff will use the selling price.

Figure 1-2 shows the last page of an estimate for the Stillwel room addition, including 70 percent markup. The company estimator created this estimate from a job survey prepared by a sales representative. Figure 1-2 is for company use and was created in the National Estimator program.

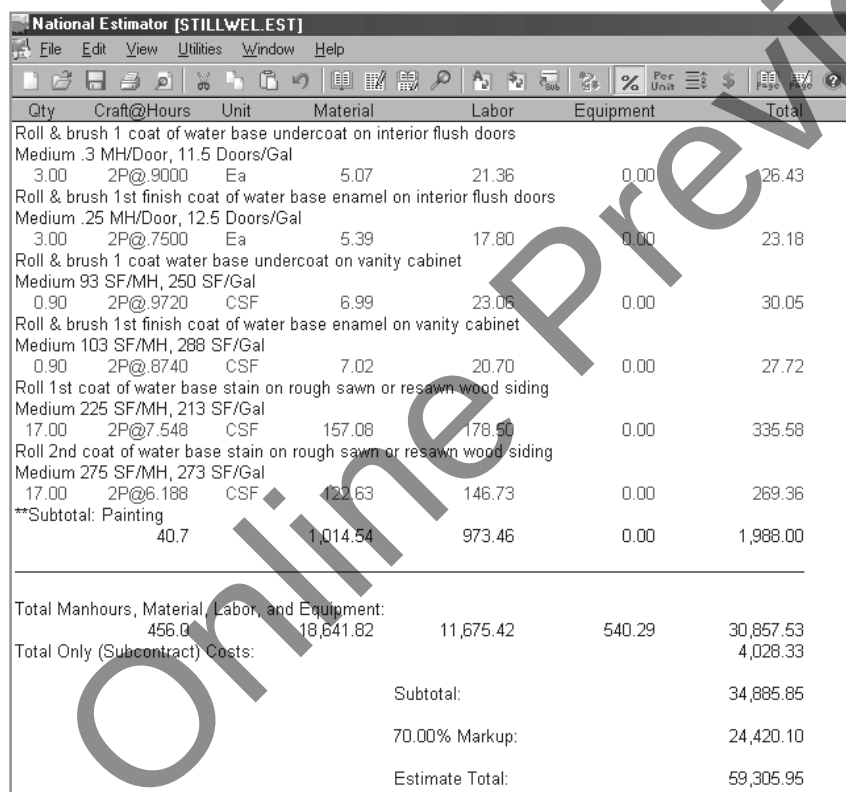

Qty	Craft@Hours	Unit	Material	Labor	Equipment	Total
Roll & brush 1 coat of water base undercoat on interior flush doors						
Medium .3 MH/Door, 11.5 Doors/Gal						
3.00	2P@.9000	Ea	5.07	21.36	0.00	26.43
Roll & brush 1st finish coat of water base enamel on interior flush doors						
Medium .25 MH/Door, 12.5 Doors/Gal						
3.00	2P@.7500	Ea	5.39	17.80	0.00	23.18
Roll & brush 1 coat water base undercoat on vanity cabinet						
Medium 93 SF/MH, 250 SF/Gal						
0.90	2P@.9720	CSF	6.99	23.06	0.00	30.05
Roll & brush 1st finish coat of water base enamel on vanity cabinet						
Medium 103 SF/MH, 288 SF/Gal						
0.90	2P@.8740	CSF	7.02	20.70	0.00	27.72
Roll 1st coat of water base stain on rough sawn or resawn wood siding						
Medium 225 SF/MH, 213 SF/Gal						
17.00	2P@7.548	CSF	157.08	178.50	0.00	335.58
Roll 2nd coat of water base stain on rough sawn or resawn wood siding						
Medium 275 SF/MH, 273 SF/Gal						
17.00	2P@6.188	CSF	122.63	146.73	0.00	269.36
**Subtotal: Painting						
	40.7		1,014.54	973.46	0.00	1,988.00
Total Manhours, Material, Labor, and Equipment:						
	456.0		18,641.82	11,675.42	540.29	30,857.53
Total Only (Subcontract) Costs:						
						4,028.33
Subtotal:						34,885.85
70.00% Markup:						24,420.10
Estimate Total:						59,305.95

Figure 1-2

Estimate with a 70 percent markup shown

Figure 1-3 shows the last page of a proposal for the same job. This is what the customer sees. It was created by the Job Cost Wizard program. Both National Estimator and Job Cost Wizard are included in the free download that comes with this book. Notice that the total is nearly the same in both documents, \$59,305.95. Figure 1-2, the estimate, shows 70 percent markup on hard costs. Figure 1-3, the proposal, doesn't show the markup at all. Instead, markup has been distributed proportionately throughout each cost item in the job. Job Cost Wizard does this distribution at the click of a button.

Craftsman Construction

6058 Corte del Cedro
Box 6500
Fairfield, GA 30456
856-3806

Proposal

Date	Estimate #
8/3/22	494
Customer	Job
Bill Stillwel	Room Addition

Description	Qty	Rate	Amount
Roll & brush 1st finish coat of water base enamel on vanity cabinet. Medium 103 SF/MH, 288 SF/Gal			
Material, per CSF	0.90	13.26	11.94
Labor, per CSF	0.90	39.09	35.18
Roll 1st coat of water base stain on rough sawn or resawn wood siding. Medium 225 SF/MH, 213 SF/Gal			
Material, per CSF	17	15.71	267.04
Labor, per CSF	17	17.85	303.45
Roll 2nd coat of water base stain on rough sawn or resawn wood siding. Medium 275 SF/MH, 273 SF/Gal			
Material, per CSF	17	12.26	208.47
Labor, per CSF	17	14.67	249.44
*Painting subtotal			3,379.60
*Project Subtotal			59,305.96
*Project Total			59,305.96

Figure 1-3

Proposal for the same job not showing the markup

Once an estimate is finished in the National Estimator program and saved to computer disk, press **[Ctrl]** on your keyboard and tap the letter **[J]** to convert the estimate into a proposal in Job Cost Wizard. You can't make changes in the Job Cost Wizard screen. But it's easy to toggle back to National Estimator program (press **[Alt]** and tap the **[Tab]** key), make a change, and then press **[Ctrl]-[J]** once again.

Job Cost Wizard offers dozens of choices on what you show and don't show in written proposals. Your bids can be long (full description for everything in the estimate) or short (only a summary of each category). You can show or hide labor and material cost detail. You can show or hide markup and profit.

Once work begins, you'll want to monitor job expenses to be sure actual costs remain consistent with estimated costs. If you use QuickBooks to pay bills and figure payroll, let QuickBooks do the comparisons for you. Job Cost Wizard exports the proposal to QuickBooks, where you can prepare progress invoices and track expenses against estimates.

The National Estimator program lets you change anything in the costbook or even add your own estimated costs. Make the *National Home Improvement Estimator* your collection point for all estimating and pricing information. Anything you add to the costbook shows up in red and can be migrated to later editions of this manual when available. The *National Home Improvement Estimator* starts out as your most useful estimating reference. What you add to the costbook will make it even more valuable.

Job Survey (Scope of Work)

Of course, neither a good price book nor a computer estimating program will solve all of your estimating problems. Computers seldom make mistakes in addition or multiplication. But nothing prevents you from making expensive estimating mistakes on your own. By far the most common estimating mistake will be omitting something essential to the job.

Get in the habit of completing an exhaustive job survey before beginning any estimate for home improvement work. Some of your estimates on a job may be too high. Other estimates on a job may be too low. With any luck, your over-estimates will roughly balance with your under-estimates, leaving the job total about where it should be. But the estimated price for anything omitted from a job survey is always zero. That's a 100 percent miss. It's hard to balance a complete miss with anything. A few of those can create a financial disaster.

Material Costs in This Book

Material costs for each item are listed in the column headed Material. These are neither retail nor wholesale prices. They are estimates of what most contractors who buy in moderate volume will pay suppliers as of mid-2022. Discounts may be available for purchases in larger volumes.

Add Delivery Expense to the material cost for other than local delivery of reasonably large quantities. Cost of delivery varies with the distance from source of supply, method of transportation, and quantity to be delivered. But most material dealers absorb the delivery cost on local delivery (5 to 15 miles) of larger quantities to good customers. Add the expense of job site delivery when it's a significant part of the material cost.

Add Sales Tax when sales tax will be charged to the contractor buying the materials. In some states, contractors have to collect sales tax based on the contract price. No matter what your state (or county) requires, National Estimator can handle the task. Click **Edit** on the National Estimator menu bar. Then click **Sales Tax**.

Waste and Coverage Loss is included in the installed material cost. The cost of many materials per unit after installation is greater than the purchase price for the same unit because of waste, shrinkage or coverage loss during installation. For example, about 120 square feet of nominal 1" x 4" square edge boards will be needed to cover 100 square feet of floor or wall. There's no coverage loss with plywood sheathing, but waste due to cutting and fitting will average about 6 percent.

Costs in the Material column of this book assume normal waste and coverage loss. Small and irregular jobs may require a greater waste allowance. Materials priced without installation (with no labor cost) don't include an allowance for waste and coverage except as noted.

Labor Costs for installing the material or doing the work described are listed in the column headed Labor. The labor cost per unit is the labor cost per hour multiplied by the manhours per unit shown after the @ sign in the Craft@Hrs column. Labor cost includes the basic wage, the employer's contribution to welfare, pension, vacation and apprentice funds, and all tax and insurance charges based on wages.

Supervision Expense to the general contractor isn't included in the labor cost. The cost of supervision and non-productive labor varies widely from job to job. Calculate the cost of supervision and non-productive labor and add this to the estimate.

Payroll Taxes and Insurance are included in the labor cost. See the following section for more on the "contractor's burden."

Manhours per Unit and the Craft performing the work are listed in the Craft@Hrs column. To find the units of work done per worker in an 8-hour day, divide 8 by the manhours per unit. To find the units done by a crew in an 8-hour day, multiply the units per worker per 8-hour day by the number of crew members.

Manhours include all productive labor normally associated with installing the materials described.

This will usually include tasks such as:

- ❖ Unloading and storing construction materials, tools and equipment on site.
- ❖ Moving tools and equipment from a storage area or truck on site at the beginning of the day.
- ❖ Returning tools and equipment to a storage area or truck on site at the end of the day.
- ❖ Normal time lost for work breaks.
- ❖ Planning and discussing the work to be performed.
- ❖ Normal handling, measuring, cutting and fitting.
- ❖ Keeping a record of the time spent and work done.
- ❖ Regular cleanup of construction debris.
- ❖ Infrequent correction or repairs required because of faulty installation.

Adjust the Labor Cost to the job you're figuring when your actual hourly labor cost is known or can be estimated. The labor costs listed in Figure 1-5 will apply within a few percent on many jobs. But labor costs may be much higher or much lower on the job you're estimating.

If the hourly wage rates listed in Figure 1-5 aren't accurate, divide your known or estimated cost per hour by the listed cost per hour. The result is your adjustment for any figure in the Labor column for that craft.

Adjust for Unusual Labor Productivity. Costs in the Labor column are for normal conditions: experienced craftsmen working on reasonably well-planned and managed home improvement projects with fair to good productivity. Labor estimates assume that materials are standard grade, appropriate tools are on hand, work done by other crafts is adequate, layout and installation are relatively uncomplicated, and working conditions don't slow progress.

Working conditions at the jobsite have a major effect on labor cost. Estimating experience and careful analysis can help you predict the effect of most changes in working conditions. Obviously, no single adjustment will apply on all jobs. But the adjustments that follow should help you produce more accurate labor estimates. More than one condition may apply on a job.

Jobsite conditions affect labor costs

- ❖ Add 10% to 15% when working temperatures are below 40 degrees or above 95 degrees.
- ❖ Add 30% to 35% when temperatures are below 20 degrees. Materials and tools are hard to handle. Bulky clothing restricts freedom of movement.
- ❖ Add 15% to 25% for work on a ladder or a scaffold, in a 36" crawl space, in a congested area, or remote from the material storage point.
- ❖ Add 50% for work in an 18" to 36" crawl space. Allow extra time for cleaning out the area before work begins.
- ❖ Add 200% if portions of the crawl space are less than 18". Allow extra time for passing tools and materials. Few contractors bid on work like this.
- ❖ Deduct 10% when the work is in an open area with excellent access and good light.
- ❖ Add 1% for each 10 feet that materials must be lifted above ground level.
- ❖ Add 5% to 50% for tradesmen with below-average skills. Deduct 5% to 25% for highly-motivated, highly-skilled tradesmen.
- ❖ Deduct 10% to 20% when an identical task is repeated many times for several days at the same site.
- ❖ Add 20% to 50% on small jobs where fitting and matching of materials is required, adjacent surfaces have to be protected and the job site is occupied during construction.
- ❖ Add 25% to 50% for work done following a major flood, fire, earthquake, hurricane or tornado while skilled tradesmen are not readily available. Material costs may also be higher after a major disaster.
- ❖ Add 10% to 35% for demanding specs, rigid inspections, unreliable suppliers, a difficult owner or an inexperienced architect.

Use an Area Modification Factor from pages 18 through 26 if your material, hourly labor or equipment costs are unknown and can't be estimated. Here's how: Use the labor and material costs in this manual without modification. Then add or deduct the percentages shown for labor, material and equipment.

Equipment Costs for small tools and expendable supplies (such as saws and tape) are usually considered overhead expense and are covered by your markup. Equipment costs for larger equipment (such as a compressor or backhoe) should be

based on the rental rate for the period needed. Equipment rental costs are included in sections where heavy equipment may be needed.

Labor and Material Costs Change. These costs were compiled in the fall of 2021 and projected to mid-2022 by adding a small percentage. This projection will be accurate for some materials and inaccurate for others. No one can predict material price changes accurately.

How Accurate Are These Figures? They're as accurate as possible considering that the estimators who wrote this book don't know your subcontractors or material suppliers, haven't seen the plans or specifications, don't know what building code applies or where the job is, had to project material costs at least six months into the future, and had no record of how much work the crew that will be assigned to the job can handle.

You wouldn't bid a job under those conditions. And we don't claim that all construction is done at these prices.

Estimating Is an Art, not a science. On many jobs the range between high and low bid will be 20 percent or more. There's room for legitimate disagreement on what the correct costs are, even when complete plans and specifications are available, the date and site are established, and labor and material costs are identical for all bidders.

No cost fits all jobs. Good estimates are custom-made for a particular project and a single contractor through judgment, analysis and experience.

This book isn't a substitute for judgment, analysis and sound estimating practice. It's an *aid* in developing an *informed opinion* of cost. If you're using this book as your sole cost authority for contract bids, you're reading more into these pages than the editors intend.

Use These Figures to compile preliminary estimates, when a "snap" bid is needed to close the deal, and when no actual costs are available. This book will reduce the chance of error or omission on bid estimates, speed "ball park" estimates, and be a good guide when there's no time to get a quote.

Where Do We Get These Figures? From the same sources all professional estimators use: material suppliers, material price services, analysis of plans, specifications, estimates and completed project costs, and both published and unpublished cost studies compiled by both private and government agencies. In addition, we conduct nationwide mail and phone surveys and have the use of several major national estimating databases.

We'll Answer Your Questions about any part of this book and explain how to apply these costs. Free telephone assistance is available from 8 a.m. until 5 p.m. Pacific time Monday through Friday except holidays. Phone 760-438-7828, Ext. 2. We don't accept collect calls and can't estimate the job for you. But if you need clarification on something in this manual, we can help.

Labor Costs and Crews

Throughout this manual you'll see a column headed *Craft@Hrs.* Letters and numbers in this column show our estimates of:

- ❖ Who will do the work (the craft code)
- ❖ An @ symbol which means at
- ❖ How long the work will take (manhours).

For example, in Chapter 4, page 70, you'll find estimates for installing BC plywood wall sheathing by the square foot. The Craft@Hrs column opposite 1/2" plywood wall sheathing shows:

B1@.016

That means we estimate the installation rate for crew B1 at 0.016 manhours per square foot. That's the same as 16 manhours per 1,000 square feet.

Figure 1-4 is a table that defines each of the craft codes used in this book. Notice that crew B1 is composed of two craftsmen: one laborer and one carpenter. To install 1,000 square feet of 1/2" BC wall sheathing at 0.016 manhours per square foot, that crew would need 16 manhours (one 8-hour day for a crew of two).

Notice also in the table that the cost per manhour for crew B1 is listed as \$34.11. That's the average for a laborer (listed at \$30.55 per hour) and a carpenter (listed at \$37.66 per hour): \$30.55 plus \$37.66 is \$68.21. Divide by 2 to get \$34.11, the average cost per manhour for crew B1.

In the table, the cost per manhour is the sum of hourly costs of all crew members divided by the number of crew members. That's the average cost per manhour.

Costs in the Labor column in this book are the product of the installation time (in manhours) multiplied by the cost per manhour. For example, in Chapter 4, the labor cost listed for 1/2" BC wall sheathing is \$0.55 per square foot. That's the installation time (0.016 manhours per square foot) multiplied by \$34.11, the average cost per manhour for crew B1.

Figure 1-5 shows hourly labor costs components — base wage, typical fringe benefits, payroll taxes, insurance and the total hourly cost.

The labor costs shown in Column 6 were used to compute the manhour costs for crews and the figures in the Labor column.

Craft Codes		
Craft Code	Cost Per Manhour	Crew Composition
B1	\$34.11	1 laborer, 1 carpenter
B2	\$35.29	1 laborer, 2 carpenters
B3	\$32.92	2 laborers, 1 carpenter
B4	\$37.77	1 laborer, 1 operating engineer, 1 reinforcing iron worker
B5	\$37.37	1 laborer, 1 carpenter, 1 cement mason, 1 operating engineer, 1 reinforcing iron worker
B6	\$33.22	1 laborer, 1 cement mason
B7	\$31.15	1 laborer, 1 truck driver
B8	\$36.82	1 laborer, 1 operating engineer
B9	\$33.36	1 bricklayer, 1 bricklayer's helper
BB	\$38.31	1 bricklayer
BC	\$37.66	1 carpenter
BE	\$41.03	1 electrician
BF	\$34.59	1 floor layer
BG	\$36.45	1 glazier
BH	\$28.40	1 bricklayer's helper
BL	\$30.55	1 laborer
BR	\$36.31	1 lather
BS	\$33.60	1 marblesetter
CF	\$35.88	1 cement mason
CT	\$35.68	1 mosaic & terrazzo worker
D1	\$37.04	1 drywall installer, 1 drywall taper
DI	\$36.81	1 drywall installer
DT	\$37.27	1 drywall taper
HC	\$29.64	1 plasterer helper
OE	\$43.09	1 operating engineer
P1	\$37.22	1 laborer, 1 plumber
PM	\$43.89	1 plumber
PP	\$34.56	1 painter, 1 laborer
PR	\$37.75	1 plasterer
PT	\$38.57	1 painter
R1	\$36.22	1 roofer, 1 laborer
RI	\$39.66	1 reinforcing iron worker
RR	\$41.89	1 roofer
SW	\$42.53	1 sheet metal worker
T1	\$33.28	1 tile layer, 1 laborer
TL	\$36.00	1 tile layer
TR	\$31.74	1 truck driver

Figure 1-4

Craft codes used in this manual

Hourly Labor Cost						
	1	2	3	4	5	6
Craft	Base wage per hour	Taxable fringe benefits (5.59% of base wage)	Insurance and employer taxes (%)	Insurance and employer taxes (\$)	Non-Taxable fringe benefits (4.94% of base wage)	Total hourly cost used in this book
Bricklayer	\$28.04	\$1.57	24.68%	\$7.31	\$1.39	\$38.31
Bricklayer's Helper	20.79	1.16	24.68	5.42	1.03	28.40
Building Laborer	21.22	1.19	31.64	7.09	1.05	30.55
Carpenter	26.38	1.47	30.54	8.51	1.30	37.66
Cement Mason	26.67	1.49	22.74	6.40	1.32	35.88
Drywall Installer	27.30	1.53	23.00	6.63	1.35	36.81
Drywall Taper	27.64	1.55	23.00	6.71	1.37	37.27
Electrician	31.28	1.76	19.53	6.46	1.56	41.03
Floor Layer	25.60	1.43	23.32	6.30	1.26	34.59
Glazier	26.61	1.49	25.06	7.04	1.31	36.45
Lather	27.39	1.53	20.90	6.04	1.35	36.31
Marble Setter	25.32	1.42	20.98	5.61	1.28	33.60
Millwright	26.83	1.50	20.87	5.91	1.33	35.57
Mosaic & Terrazzo Worker	26.89	1.50	20.98	5.96	1.33	35.68
Operating Engineer	31.57	1.77	24.58	8.19	1.56	43.09
Painter	28.31	1.58	24.34	7.28	1.40	38.57
Plasterer	27.01	1.51	27.70	7.90	1.33	37.75
Plasterer Helper	21.20	1.19	27.70	6.20	1.05	29.64
Plumber	32.34	1.81	23.83	8.14	1.60	43.89
Reinforcing Ironworker	28.35	1.59	27.80	8.32	1.40	39.66
Roofer	27.00	1.51	42.26	12.05	1.33	41.89
Sheet Metal Worker	30.97	1.73	25.37	8.30	1.53	42.53
Sprinkler Fitter	31.78	1.78	24.55	8.24	1.57	43.37
Tile Layer	27.13	1.52	20.98	6.01	1.34	36.00
Truck Driver	23.08	1.29	25.58	6.23	1.14	31.74

Figure 1-5*Components of hourly labor costs*

It's important that you understand what's included in the figures in each of the six columns in the table. Here's an explanation:

Column 1, the base wage per hour, is the craftsman's hourly wage. These figures are representative of what many contractors will be paying craftsmen working on home improvement jobs in 2022.

Column 2, taxable fringe benefits, includes vacation pay, sick leave and other taxable benefits. These fringe benefits average 5.59 percent of the base wage for many construction contractors. This benefit is in addition to the base wage.

Column 3, insurance and employer taxes in percent, shows the insurance and tax rate for construction trades. The cost of insurance in this column includes workers' compensation and contractor's casualty and liability coverage. Insurance rates vary widely from state to state and depend on a contractor's loss experience. Note that

taxes and insurance increase the hourly labor cost by 30 to 35 percent for most trades. There is no legal way to avoid these costs.

Column 4, insurance and employer taxes in dollars, shows the hourly cost of taxes and insurance for each construction trade. Insurance and taxes are paid on the costs in both columns 1 and 2.

Column 5, non-taxable fringe benefits, includes employer paid non-taxable benefits such as medical coverage and tax-deferred pension and profit sharing plans. These fringe benefits average 4.94 percent of the base wage for many construction contractors. The employer pays no taxes or insurance on these benefits.

Column 6, the total hourly cost in dollars, is the sum of columns 1, 2, 4 and 5.

These hourly labor costs will apply within a few percent on many jobs. But wage rates may be much higher or lower in the area where you do business. We recommend using your actual labor cost rather than national averages. That's easy with the National Estimator program. When copying and pasting any cost to your estimate, adjust the assumed hourly labor cost to your actual cost. You need do this only once for each trade. And you can make this adjustment at any time. Any change you make is applied to that trade throughout the estimate.

Abbreviations			
4WD	four-wheel drive	EPA	Environmental Protection Agency
ABS	acrylonitrile butadiene styrene	F	Fahrenheit
AC	alternating current	GFCI	ground fault circuit interrupter
ACQ	Alkaline Copper Quat	GRS	galvanized rigid steel
ADA	Americans with Disabilities Act	H	height
ANSI	American Nat. Standards Institute	HOM	higher order mode
APP	atactic polypropylene	HP	horsepower
ASTM	Amer. Society for Testing Materials	HVAC	heating, ventilating & air cond.
AWG	American Wire Gauge	ID	inside diameter
BF	board foot	IMC	intermediate metal conduit
Btr	better	KD	kiln dried
Btu(s)	British thermal unit(s)	KO	knockout
C	Celsius/Centigrade	kW	kilowatt(s)
CF	cubic foot	L	length
CFM	cubic feet per minute	Lb(s)	pound(s)
CLF	100 linear feet	LF	linear foot
CPM	cycles per minute	LS	lump sum
CSF	100 square feet	MBF	1,000 board feet
CY	cubic yard	MDF	medium density fiberboard
d	penny	mm	millimeter(s)
D	depth	Mo	month
DWV	drain, waste & vent	MPH	miles per hour
Ea	each	MSF	1,000 square feet
EMT	electric metallic tube	NEC	National Electrical Code
		NEMA	National Electrical Manufacturer's Assoc.
		OC	spacing from center to center
		OD	outside diameter
		OSB	oriented strand board
		OSHA	Occupational Safety & Health Admin.
		oz.	ounce(s)
		PSI	pounds per square inch
		PVC	polyvinyl chloride
		R	thermal resistance
		S4S	surfaced 4 sides
		SBS	styrene butadiene styrene
		SF	square foot
		SFCA	(per) square foot of contact area
		Sq	100 square feet
		Std	standard
		SY	square yard
		T	thick
		T&G	tongue & groove edge
		UL	Underwriter's Laboratory
		USDA	United States Dept. of Agriculture
		UV	ultraviolet
		W	width
		X	by or times

Figure 1-6

Abbreviations used in this manual

Area Modification Factors

Construction costs are higher in some areas than in other areas. Add or deduct the percentages shown on the following pages to adapt the costs in this book to your jobsite. Adjust your cost estimate by the appropriate percentages in this table to find the estimated cost for the site selected. Where 0% is shown, it means no modification is required.

Modification factors are listed by state and province. Areas within each state are listed by the first three digits of the postal zip code. For convenience, one representative city is identified in each three-digit zip or range of zips. Percentages are based on the average of all data points in the table. Factors listed for each state and province are the average of all data in that state or province. Figures for the zips are the average of all information in that area. And figures in the Total column are the weighted average of factors for Labor, Material and Equipment.

The National Estimator program will apply an area modification factor for any five-digit zip you select. Click Utilities. Click Options. Then select the Area Modification Factors tab.

These percentages are composites of many costs and will not necessarily be accurate when estimating the cost of any particular part of a building. But when used to modify costs for an entire structure, they should improve the accuracy of your estimates.

Area Modification Factors

Location	Zip	Mat.	Lab.	Equip.	Total Wtd. Avg.
Alabama Average		-1	-7	0	-4%
Anniston	362	-3	-13	-1	-8%
Auburn	368	-1	-8	0	-4%
Bellamy	369	-2	13	-1	5%
Birmingham	350-352	-3	8	-1	2%
Dothan	363	-1	-13	0	-7%
Evergreen	364	-2	-20	-1	-10%
Gadsden	359	-4	-15	-1	-9%
Huntsville	358	1	-3	0	-1%
Jasper	355	-2	-16	-1	-8%
Mobile	365-366	-1	-3	0	-2%
Montgomery	360-361	-1	-3	0	-2%
Scottsboro	357	0	-8	0	-4%
Selma	367	-1	-10	0	-5%
Sheffield	356	-1	1	0	0%
Tuscaloosa	354	1	-9	0	-4%
Alaska Average		14	33	4	23%
Anchorage	995	16	38	5	26%
Fairbanks	997	16	40	5	27%
Juneau	998	18	20	6	19%
Ketchikan	999	3	36	1	18%
King Salmon	996	16	32	5	23%

Location	Zip	Mat.	Lab.	Equip.	Total Wtd. Avg.
Arizona Average		1	-9	0	-4%
Chambers	865	1	-19	0	-8%
Douglas	855	0	-18	0	-8%
Flagstaff	860	2	-17	1	-7%
Kingman	864	1	-11	0	-5%
Mesa	852	1	5	0	3%
Phoenix	850	1	6	0	3%
Prescott	863	3	-16	1	-6%
Show Low	859	2	-18	1	-7%
Tucson	856-857	0	-10	0	-5%
Yuma	853	0	5	0	2%
Arkansas Average		-2	-13	0	-7%
Batesville	725	0	-20	0	-9%
Camden	717	-4	1	-1	-2%
Fayetteville	727	0	-8	0	-4%
Fort Smith	729	-1	-14	0	-7%
Harrison	726	-1	-25	0	-12%
Hope	718	-3	-15	-1	-8%
Hot Springs	719	-2	-25	-1	-13%
Jonesboro	724	-1	-18	0	-9%
Little Rock	720-722	-1	-6	0	-3%
Pine Bluff	716	-4	-19	-1	-11%

Area Modification Factors

Location	Zip	Mat.	Lab.	Equip.	Total Wtd. Avg.
Russellville	728	0	-9	0	-4%
West Memphis	723	-3	-1	-1	-2%
California Average		2	16	1	9%
Alhambra	917-918	3	15	1	8%
Bakersfield	932-933	1	4	0	2%
El Centro	922	1	-1	0	0%
Eureka	955	1	13	0	7%
Fresno	936-938	0	-5	0	-2%
Herlong	961	2	17	1	9%
Inglewood	902-905	3	16	1	9%
Irvine	926-927	3	24	1	13%
Lompoc	934	3	2	1	3%
Long Beach	907-908	3	17	1	9%
Los Angeles	900-901	3	13	1	8%
Marysville	959	1	18	0	9%
Modesto	953	1	2	0	1%
Mojave	935	0	11	0	5%
Novato	949	3	36	1	18%
Oakland	945-947	3	48	1	24%
Orange	928	3	22	1	12%
Oxnard	930	3	1	1	2%
Pasadena	910-912	4	16	1	9%
Rancho Cordova	956-957	2	6	1	4%
Redding	960	1	-8	0	-3%
Richmond	948	2	35	1	17%
Riverside	925	1	7	0	4%
Sacramento	958	1	6	0	3%
Salinas	939	3	-1	1	1%
San Bernardino	923-924	0	4	0	2%
San Diego	919-921	3	13	1	8%
San Francisco	941	3	55	1	27%
San Jose	950-951	3	33	1	17%
San Mateo	943-944	4	40	1	21%
Santa Barbara	931	3	11	1	7%
Santa Rosa	954	3	32	1	16%
Stockton	952	2	7	1	4%
Sunnyvale	940	3	39	1	20%
Van Nuys	913-916	3	14	1	8%
Whittier	906	3	14	1	8%
Colorado Average		2	1	1	1%
Aurora	800-801	3	11	1	7%
Boulder	803-804	3	5	1	4%
Colorado Springs	808-809	2	-3	1	0%
Denver	802	3	13	1	8%
Durango	813	1	-3	0	-1%
Fort Morgan	807	2	-6	1	-2%
Glenwood Springs	816	2	6	1	4%
Grand Junction	814-815	1	-1	0	0%
Greeley	806	3	8	1	5%
Longmont	805	3	1	1	2%
Pagosa Springs	811	0	-9	0	-4%
Pueblo	810	-1	2	0	0%
Salida	812	2	-15	1	-6%

Location	Zip	Mat.	Lab.	Equip.	Total Wtd. Avg.
Connecticut Average		1	16	0	8%
Bridgeport	066	0	13	0	6%
Bristol	060	1	24	0	12%
Fairfield	064	2	17	1	9%
Hartford	061	0	23	0	11%
New Haven	065	1	15	0	7%
Norwich	063	0	7	0	3%
Stamford	068-069	4	21	1	12%
Waterbury	067	1	12	0	6%
West Hartford	062	1	9	0	5%
Delaware Average		1	3	0	2%
Dover	199	1	-9	0	-4%
Newark	197	2	10	1	6%
Wilmington	198	0	9	0	4%
District of Columbia					
Washington	200-205	2	23	1	12%
Florida Average		0	-10	0	-5%
Altamonte Springs	327	-1	-6	0	-3%
Bradenton	342	0	-12	0	-6%
Brooksville	346	0	-16	0	-7%
Daytona Beach	321	-2	-18	-1	-9%
Fort Lauderdale	333	3	1	1	2%
Fort Myers	339	0	-12	0	-6%
Fort Pierce	349	-2	-20	-1	-10%
Gainesville	326	-1	-18	0	-9%
Jacksonville	322	-1	-3	0	-2%
Lakeland	338	-3	-13	-1	-8%
Melbourne	329	-2	-15	-1	-8%
Miami	330-332	2	-1	1	1%
Naples	341	3	-8	1	-2%
Ocala	344	-3	-23	-1	-12%
Orlando	328	0	2	0	1%
Panama City	324	-2	-21	-1	-11%
Pensacola	325	-1	-17	0	-8%
Saint Augustine	320	-1	-4	0	-2%
Saint Cloud	347	0	-5	0	-2%
St Petersburg	337	0	-12	0	-6%
Tallahassee	323	0	-13	0	-6%
Tampa	335-336	-1	-1	0	-1%
West Palm Beach	334	1	-5	0	-2%
Georgia Average		-1	-7	0	-4%
Albany	317	-2	-10	-1	-6%
Athens	306	0	-11	0	-5%
Atlanta	303	3	23	1	12%
Augusta	308-309	-2	-2	-1	-2%
Buford	305	0	-5	0	-2%
Calhoun	307	-1	-19	0	-9%
Columbus	318-319	-1	-6	0	-3%
Dublin/Fort Valley	310	-3	-13	-1	-8%
Hinesville	313	-2	-11	-1	-6%
Kings Bay	315	-2	-19	-1	-10%

Area Modification Factors

Location	Zip	Mat.	Lab.	Equip.	Total Wtd. Avg.
Macon	312	-2	-7	-1	-4%
Marietta	300-302	1	8	0	4%
Savannah	314	-1	-7	0	-4%
Statesboro	304	-2	-21	-1	-11%
Valdosta	316	-1	-1	0	-1%

Hawaii Average		17	25	6	20%
Aliamanu	968	17	29	6	22%
Ewa	967	17	23	6	20%
Halawa Heights	967	17	23	6	20%
Hilo	967	17	23	6	20%
Honolulu	968	17	29	6	22%
Kailua	968	17	29	6	22%
Lualualei	967	17	23	6	20%
Mililani Town	967	17	23	6	20%
Pearl City	967	17	23	6	20%
Wahiawa	967	17	23	6	20%
Waianae	967	17	23	6	20%
Wailuku (Maui)	967	17	23	6	20%

Idaho Average		0	-19	0	-9%
Boise	837	1	-12	0	-5%
Coeur d'Alene	838	0	-21	0	-10%
Idaho Falls	834	-1	-19	0	-9%
Lewiston	835	0	-24	0	-11%
Meridian	836	0	-19	0	-9%
Pocatello	832	-1	-20	0	-10%
Sun Valley	833	0	-18	0	-8%

Illinois Average		-1	9	0	4%
Arlington Heights	600	1	29	0	14%
Aurora	605	2	28	1	14%
Belleville	622	-2	2	-1	0%
Bloomington	617	1	-4	0	-1%
Carbondale	629	-3	-6	-1	-4%
Carol Stream	601	2	28	1	14%
Centralia	628	-3	-3	-1	-3%
Champaign	618	-1	-3	0	-2%
Chicago	606-608	2	31	1	15%
Decatur	623	-2	-13	-1	-7%
Galesburg	614	-2	-6	-1	-4%
Granite City	620	-3	11	-1	3%
Green River	612	-1	12	0	5%
Joliet	604	0	29	0	13%
Kankakee	609	-2	-4	-1	-3%
Lawrenceville	624	-4	-9	-1	-6%
Oak Park	603	3	35	1	18%
Peoria	615-616	-1	15	0	6%
Peru	613	0	4	0	2%
Quincy	602	3	31	1	16%
Rockford	610-611	-2	8	-1	3%
Springfield	625-627	-2	2	-1	0%
Urbana	619	-3	-6	-1	-4%

Location	Zip	Mat.	Lab.	Equip.	Total Wtd. Avg.
Indiana Average		-2	-3	-1	-3%
Aurora	470	-1	-9	0	-5%
Bloomington	474	1	-6	0	-2%
Columbus	472	0	-9	0	-4%
Elkhart	465	-2	-7	-1	-4%
Evansville	476-477	-2	12	-1	4%
Fort Wayne	467-468	-3	1	-1	-1%
Gary	463-464	-4	23	-1	8%
Indianapolis	460-462	-1	10	0	4%
Jasper	475	-2	-14	-1	-8%
Jeffersonville	471	0	-11	0	-5%
Kokomo	469	-2	-15	-1	-8%
Lafayette	479	-2	-9	-1	-5%
Muncie	473	-4	-13	-1	-8%
South Bend	466	-4	0	-1	-2%
Terre Haute	478	-4	-2	-1	-3%

Iowa Average		-2	-4	-1	-3%
Burlington	526	0	2	0	1%
Carroll	514	-3	-20	-1	-11%
Cedar Falls	506	-1	-7	0	-4%
Cedar Rapids	522-524	0	5	0	2%
Cherokee	510	-2	4	-1	1%
Council Bluffs	515	-2	1	-1	-1%
Creston	508	-3	6	-1	1%
Davenport	527-528	-1	3	0	1%
Decorah	521	-2	-14	-1	-8%
Des Moines	500-503	-2	13	-1	5%
Dubuque	520	-2	-7	-1	-4%
Fort Dodge	505	-2	-5	-1	-3%
Mason City	504	0	-6	0	-3%
Ottumwa	525	0	-13	0	-6%
Sheldon	512	0	-15	0	-7%
Shenandoah	516	-3	-26	-1	-14%
Sioux City	511	-2	14	-1	5%
Spencer	513	-1	-14	0	-7%
Waterloo	507	-4	-1	-1	-3%

Kansas Average		-2	2	-1	0%
Colby	677	-1	-17	0	-8%
Concordia	669	-1	-25	0	-12%
Dodge City	678	-2	-7	-1	-4%
Emporia	668	-3	20	-1	8%
Fort Scott	667	-2	-11	-1	-6%
Hays	676	-2	-26	-1	-13%
Hutchinson	675	-3	-9	-1	-6%
Independence	673	-3	67	-1	29%
Kansas City	660-662	0	10	0	5%
Liberal	679	-2	33	-1	14%
Salina	674	-3	-11	-1	-7%
Topeka	664-666	-3	2	-1	-1%
Wichita	670-672	-2	-6	-1	-4%

Area Modification Factors

Location	Zip	Mat.	Lab.	Equip.	Total Wtd. Avg.
Kentucky Average		-1	-8	0	-4%
Ashland	411-412	-4	-5	-1	-4%
Bowling Green	421	0	-11	0	-5%
Campton	413-414	-1	-23	0	-11%
Covington	410	-1	5	0	2%
Elizabethtown	427	-1	-20	0	-10%
Frankfort	406	1	13	0	7%
Hazard	417-418	-2	-19	-1	-10%
Hopkinsville	422	-2	-9	-1	-5%
Lexington	403-405	1	1	0	1%
London	407-409	-1	-13	0	-7%
Louisville	400-402	-1	5	0	2%
Owensboro	423	-2	-6	-1	-4%
Paducah	420	-2	2	-1	0%
Pikeville	415-416	-3	-14	-1	-8%
Somerset	425-426	0	-23	0	-11%
White Plains	424	-3	-6	-1	-4%

Louisiana Average		-1	7	-1	2%
Alexandria	713-714	-3	13	-1	4%
Baton Rouge	707-708	0	21	0	10%
Houma	703	-2	11	-1	4%
Lafayette	705	0	18	0	8%
Lake Charles	706	-2	30	-1	13%
Mandeville	704	-1	-5	0	-3%
Minden	710	-2	-8	-1	-5%
Monroe	712	-2	-14	-1	-8%
New Orleans	700-701	0	5	0	2%
Shreveport	711	-2	-6	-1	-4%

Maine Average		0	-10	0	-5%
Auburn	042	-1	-7	0	-4%
Augusta	043	-1	-9	0	-5%
Bangor	044	-1	-11	0	-6%
Bath	045	1	-15	0	-6%
Brunswick	039-040	1	-3	0	-1%
Camden	048	-1	-21	0	-10%
Cutler	046	-1	-15	0	-7%
Dexter	049	-1	-8	0	-4%
Northern Area	047	-2	-16	-1	-8%
Portland	041	2	2	1	2%

Maryland Average		1	3	0	2%
Annapolis	214	4	13	1	8%
Baltimore	210-212	-1	16	0	7%
Bethesda	208-209	3	24	1	13%
Church Hill	216	2	-10	1	-4%
Cumberland	215	-4	-12	-1	-8%
Elkton	219	2	-14	1	-5%
Frederick	217	1	13	0	7%
Laurel	206-207	2	15	1	8%
Salisbury	218	1	-14	0	-6%

Location	Zip	Mat.	Lab.	Equip.	Total Wtd. Avg.
Massachusetts Average		2	23	1	12%
Ayer	015-016	1	11	0	6%
Bedford	017	3	30	1	15%
Boston	021-022	3	77	1	37%
Brockton	023-024	3	41	1	20%
Cape Cod	026	2	6	1	4%
Chicopee	010	1	14	0	7%
Dedham	019	2	36	1	18%
Fitchburg	014	2	21	1	11%
Hingham	020	3	37	1	19%
Lawrence	018	2	28	1	14%
Nantucket	025	3	16	1	9%
New Bedford	027	1	12	0	6%
Northfield	013	2	3	1	2%
Pittsfield	012	1	0	0	1%
Springfield	011	-1	18	0	8%

Michigan Average		-2	3	-1	1%
Battle Creek	490-491	-3	1	-1	-1%
Detroit	481-482	0	15	0	7%
Flint	484-485	-3	-5	-1	-4%
Grand Rapids	493-495	-2	4	-1	1%
Grayling	497	1	-17	0	-7%
Jackson	492	-3	1	-1	-1%
Lansing	488-489	-1	1	0	0%
Marquette	498-499	-1	7	0	3%
Pontiac	483	-3	29	-1	12%
Royal Oak	480	-2	18	-1	7%
Saginaw	486-487	-2	-9	-1	-5%
Traverse City	496	-1	-4	0	-2%

Minnesota Average		0	-1	0	-1%
Bemidji	566	-1	-11	0	-6%
Brainerd	564	0	-6	0	-3%
Duluth	556-558	-2	7	-1	2%
Fergus Falls	565	-1	-20	0	-10%
Magnolia	561	0	-18	0	-8%
Mankato	560	0	-8	0	-4%
Minneapolis	553-555	1	28	0	13%
Rochester	559	0	-3	0	-1%
St Cloud	563	-1	6	0	2%
St Paul	550-551	1	26	0	12%
Thief River Falls	567	0	-5	0	-2%
Willmar	562	-1	-11	0	-6%

Mississippi Average		-2	-11	-1	-6%
Clarksdale	386	-3	-16	-1	-9%
Columbus	397	-1	1	0	0%
Greenville	387	-4	-26	-1	-14%
Greenwood	389	-3	-18	-1	-10%
Gulfport	395	-2	-11	-1	-6%
Jackson	390-392	-3	-2	-1	-3%
Laurel	394	-3	-11	-1	-7%

Area Modification Factors

Location	Zip	Mat.	Lab.	Equip.	Total Wtd. Avg.
McComb	396	-2	-22	-1	-11%
Meridian	393	-2	8	-1	3%
Tupelo	388	-1	-13	0	-7%
Missouri Average		-1	-5	0	-3%
Cape Girardeau	637	-2	-8	-1	-5%
Caruthersville	638	-1	-15	0	-7%
Chillicothe	646	-2	-7	-1	-4%
Columbia	652	1	-9	0	-4%
East Lynne	647	-1	10	0	4%
Farmington	636	-3	-15	-1	-8%
Hannibal	634	0	-4	0	-2%
Independence	640	-1	13	0	5%
Jefferson City	650-651	1	-11	0	-5%
Joplin	648	-2	-10	-1	-6%
Kansas City	641	-2	15	-1	6%
Kirksville	635	0	-33	0	-15%
Knob Noster	653	0	7	0	3%
Lebanon	654-655	-2	-23	-1	-12%
Poplar Bluff	639	-1	-21	0	-10%
Saint Charles	633	1	2	0	1%
Saint Joseph	644-645	-3	2	-1	-1%
Springfield	656-658	-2	-15	-1	-8%
St Louis	630-631	-2	20	-1	8%
Montana Average		0	-7	0	-3%
Billings	590-591	0	-4	0	-2%
Butte	597	1	-7	0	-3%
Fairview	592	-1	27	0	12%
Great Falls	594	-1	-11	0	-6%
Havre	595	-1	-19	0	-9%
Helena	596	0	-4	0	-2%
Kalispell	599	1	-15	0	-6%
Miles City	593	-1	-15	0	-7%
Missoula	598	1	-14	0	-6%
Nebraska Average		-1	-17	0	-8%
Alliance	693	-1	-21	0	-10%
Columbus	686	-1	-15	0	-7%
Grand Island	688	0	-18	0	-8%
Hastings	689	0	-20	0	-9%
Lincoln	683-685	0	-9	0	-4%
McCook	690	1	-21	0	-9%
Norfolk	687	-3	-19	-1	-10%
North Platte	691	0	-14	0	-6%
Omaha	680-681	-1	1	0	0%
Valentine	692	-2	-31	-1	-15%
Nevada Average		2	0	1	1%
Carson City	897	2	-12	1	-4%
Elko	898	1	19	0	9%
Ely	893	2	-8	1	-3%
Fallon	894	2	-2	1	0%
Las Vegas	889-891	2	5	1	3%
Reno	895	2	-4	1	-1%

Location	Zip	Mat.	Lab.	Equip.	Total Wtd. Avg.
New Hampshire Average		1	-4	0	-1%
Charlestown	036	1	-11	0	-5%
Concord	034	1	-7	0	-3%
Dover	038	1	1	0	1%
Lebanon	037	2	-8	1	-3%
Littleton	035	-1	-12	0	-6%
Manchester	032-033	0	4	0	2%
New Boston	030-031	1	5	0	3%
New Jersey Average		1	20	0	9%
Atlantic City	080-084	-2	12	-1	4%
Brick	087	2	2	1	2%
Dover	078	1	19	0	9%
Edison	088-089	1	28	0	13%
Hackensack	076	3	18	1	10%
Monmouth	077	3	22	1	12%
Newark	071-073	1	23	0	11%
Passaic	070	2	23	1	12%
Paterson	074-075	2	13	1	7%
Princeton	085	-2	24	-1	10%
Summit	079	3	32	1	16%
Trenton	086	-3	19	-1	7%
New Mexico Average		0	-17	0	-8%
Alamogordo	883	-1	-22	0	-11%
Albuquerque	870-871	2	-8	1	-3%
Clovis	881	-2	-22	-1	-11%
Farmington	874	2	-4	1	-1%
Fort Sumner	882	-3	0	-1	-2%
Gallup	873	1	-17	0	-7%
Holman	877	2	-24	1	-10%
Las Cruces	880	-1	-17	0	-8%
Santa Fe	875	3	-20	1	-8%
Socorro	878	1	-32	0	-14%
Truth or Consequences	879	-2	-15	-1	-8%
Tucumcari	884	-1	-17	0	-8%
New York Average		0	13	0	6%
Albany	120-123	-1	16	0	7%
Amityville	117	2	18	1	9%
Batavia	140	-3	5	-1	1%
Binghamton	137-139	-3	0	-1	-2%
Bronx	104	2	19	1	10%
Brooklyn	112	3	12	1	7%
Buffalo	142	-4	7	-1	1%
Elmira	149	-4	-1	-1	-3%
Flushing	113	3	30	1	15%
Garden City	115	3	29	1	15%
Hicksville	118	3	27	1	14%
Ithaca	148	-4	-6	-1	-5%
Jamaica	114	3	27	1	14%
Jamestown	147	-4	-11	-1	-7%
Kingston	124	0	-8	0	-4%
Long Island	111	3	62	1	30%

Area Modification Factors

Location	Zip	Mat.	Lab.	Equip.	Total Wtd. Avg.
Montauk	119	1	15	0	7%
New York (Manhattan)	100-102	3	64	1	31%
New York City	100-102	3	64	1	31%
Newcomb	128	-1	2	0	0%
Niagara Falls	143	-4	-8	-1	-6%
Plattsburgh	129	1	-3	0	-1%
Poughkeepsie	125-126	1	2	0	1%
Queens	110	4	33	1	17%
Rochester	144-146	-3	8	-1	2%
Rockaway	116	3	18	1	10%
Rome	133-134	-3	-6	-1	-4%
Staten Island	103	3	15	1	8%
Stewart	127	-1	-9	0	-5%
Syracuse	130-132	-3	7	-1	2%
Tonawanda	141	-4	2	-1	-1%
Utica	135	-4	-8	-1	-6%
Watertown	136	-2	0	-1	-1%
West Point	109	1	11	0	6%
White Plains	105-108	3	27	1	14%

North Carolina Average **1** **-9** **0** **-4%**

Asheville	287-289	1	-16	0	-7%
Charlotte	280-282	1	15	0	7%
Durham	277	2	-3	1	0%
Elizabeth City	279	1	-18	0	-8%
Fayetteville	283	-1	-12	0	-6%
Goldsboro	275	1	-2	0	0%
Greensboro	274	1	-7	0	-3%
Hickory	286	-1	-17	0	-8%
Kinston	285	-1	-19	0	-9%
Raleigh	276	3	2	1	3%
Rocky Mount	278	-1	-14	0	-7%
Wilmington	284	1	-14	0	-6%
Winston-Salem	270-273	0	-10	0	-5%

North Dakota Average **-1** **10** **0** **4%**

Bismarck	585	0	6	0	3%
Dickinson	586	-1	34	0	15%
Fargo	580-581	0	1	0	0%
Grand Forks	582	0	-3	0	-1%
Jamestown	584	-1	-7	0	-4%
Minot	587	-1	21	0	9%
Nekoma	583	-1	-20	0	-10%
Williston	588	-1	47	0	21%

Ohio Average **-2** **2** **-1** **0%**

Akron	442-443	-2	4	-1	1%
Canton	446-447	-2	-3	-1	-2%
Chillicothe	456	-2	-3	-1	-2%
Cincinnati	450-452	-1	7	0	3%
Cleveland	440-441	-3	11	-1	3%
Columbus	432	0	11	0	5%
Dayton	453-455	-3	6	-1	1%

Location	Zip	Mat.	Lab.	Equip.	Total Wtd. Avg.
Lima	458	-3	-8	-1	-5%
Marietta	457	-2	-8	-1	-5%
Marion	433	-3	-9	-1	-6%
Newark	430-431	-1	8	0	3%
Sandusky	448-449	-1	-5	0	-3%
Steubenville	439	-3	6	-1	1%
Toledo	434-436	-1	16	0	7%
Warren	444	-4	-6	-1	-5%
Youngstown	445	-5	-1	-2	-3%
Zanesville	437-438	-2	0	-1	-1%

Oklahoma Average **-3** **-7** **-1** **-5%**

Adams	739	-2	-20	-1	-10%
Ardmore	734	-3	1	-1	-1%
Clinton	736	-3	-2	-1	-3%
Durant	747	-4	-20	-1	-11%
Enid	737	-4	-4	-1	-4%
Lawton	735	-3	-15	-1	-8%
McAlester	745	-4	-10	-1	-7%
Muskogee	744	-2	-16	-1	-8%
Norman	730	-2	-6	-1	-4%
Oklahoma City	731	-2	-4	-1	-3%
Ponca City	746	-3	1	-1	-1%
Poteau	749	-2	-13	-1	-7%
Pryor	743	-2	-11	-1	-6%
Shawnee	748	-4	-13	-1	-8%
Tulsa	740-741	-1	1	0	0%
Woodward	738	-4	15	-1	5%

Oregon Average **1** **-9** **1** **-3%**

Adrian	979	-1	-24	0	-12%
Bend	977	1	-11	0	-5%
Eugene	974	2	-9	1	-3%
Grants Pass	975	2	-13	1	-5%
Klamath Falls	976	2	-19	1	-8%
Pendleton	978	0	-7	0	-3%
Portland	970-972	2	19	1	10%
Salem	973	2	-7	1	-2%

Pennsylvania Average **-3** **0** **-1** **-1%**

Allentown	181	-2	8	-1	3%
Altoona	166	-3	-14	-1	-8%
Beaver Springs	178	-3	-8	-1	-5%
Bethlehem	180	-1	10	0	4%
Bradford	167	-4	-13	-1	-8%
Butler	160	-4	1	-1	-2%
Chambersburg	172	-1	-13	0	-7%
Clearfield	168	2	-8	1	-3%
DuBois	158	-2	-19	-1	-10%
East Stroudsburg	183	0	-11	0	-5%
Erie	164-165	-3	-10	-1	-6%
Genesee	169	-4	-5	-1	-4%
Greensburg	156	-4	-5	-1	-4%
Harrisburg	170-171	-2	8	-1	3%

Area Modification Factors

Location	Zip	Mat.	Lab.	Equip.	Total Wtd. Avg.
Hazleton	182	-3	-3	-1	-3%
Johnstown	159	-4	-16	-1	-9%
Kittanning	162	-4	-9	-1	-6%
Lancaster	175-176	-2	1	-1	-1%
Meadville	163	-4	-16	-1	-9%
Montrose	188	-3	-6	-1	-4%
New Castle	161	-4	-1	-1	-3%
Philadelphia	190-191	-3	27	-1	11%
Pittsburgh	152	-4	17	-1	6%
Pottsville	179	-4	-12	-1	-8%
Punxsutawney	157	-4	-1	-1	-3%
Reading	195-196	-4	9	-1	2%
Scranton	184-185	-2	4	-1	1%
Somerset	155	-4	-16	-1	-9%
Southeastern	193	0	18	0	8%
Uniontown	154	-4	-9	-1	-6%
Valley Forge	194	-3	27	-1	11%
Warminster	189	-1	24	0	11%
Warrendale	150-151	-4	16	-1	5%
Washington	153	-4	23	-1	8%
Wilkes Barre	186-187	-3	2	-1	-1%
Williamsport	177	-3	-1	-1	-2%
York	173-174	-3	2	-1	-1%

Rhode Island Average		1	10	0	5%
Bristol	028	1	9	0	5%
Coventry	028	1	9	0	5%
Cranston	029	1	12	0	6%
Davisville	028	1	9	0	5%
Narragansett	028	1	9	0	5%
Newport	028	1	9	0	5%
Providence	029	1	12	0	6%
Warwick	028	1	9	0	5%

South Carolina Average		-1	-2	0	-1%
Aiken	298	0	9	0	4%
Beaufort	299	-1	-4	0	-2%
Charleston	294	-1	0	0	-1%
Columbia	290-292	0	-4	0	-2%
Greenville	296	0	17	0	8%
Myrtle Beach	295	0	-17	0	-8%
Rock Hill	297	-1	-11	0	-6%
Spartanburg	293	-2	-6	-1	-4%

South Dakota Average		-1	-12	0	-6%
Aberdeen	574	-1	-15	0	-7%
Mitchell	573	-1	-11	0	-6%
Mobridge	576	-2	-18	-1	-9%
Pierre	575	-2	-20	-1	-10%
Rapid City	577	-2	-14	-1	-8%

Location	Zip	Mat.	Lab.	Equip.	Total Wtd. Avg.
Sioux Falls	570-571	0	-2	0	-1%
Watertown	572	-1	-7	0	-4%

Tennessee Average		0	-5	0	-2%
Chattanooga	374	-1	5	0	2%
Clarksville	370	1	2	0	1%
Cleveland	373	-1	-1	0	-1%
Columbia	384	-1	-14	0	-7%
Cookeville	385	0	-18	0	-8%
Jackson	383	-1	-3	0	-2%
Kingsport	376	0	-11	0	-5%
Knoxville	377-379	-1	-3	0	-2%
McKenzie	382	-1	-16	0	-8%
Memphis	380-381	-1	3	0	1%
Nashville	371-372	1	4	0	2%

Texas Average		-2	12	-1	5%
Abilene	795-796	-4	0	-1	-2%
Amarillo	790-791	-2	-2	-1	-2%
Arlington	760	-1	4	0	1%
Austin	786-787	1	24	0	12%
Bay City	774	-1	86	0	39%
Beaumont	776-777	-3	43	-1	18%
Brownwood	768	-3	-14	-1	-8%
Bryan	778	0	18	0	8%
Childress	792	-3	-28	-1	-14%
Corpus Christi	783-784	-2	41	-1	18%
Dallas	751-753	-1	15	0	6%
Del Rio	788	-3	4	-1	0%
El Paso	798-799	-3	-12	-1	-7%
Fort Worth	761-762	-1	5	0	2%
Galveston	775	-3	55	-1	24%
Giddings	789	0	13	0	6%
Greenville	754	-3	9	-1	3%
Houston	770-772	-1	58	0	26%
Huntsville	773	-2	59	-1	26%
Longview	756	-2	4	-1	1%
Lubbock	793-794	-3	-11	-1	-7%
Lufkin	759	-3	20	-1	8%
McAllen	785	-3	-9	-1	-6%
Midland	797	-3	25	-1	10%
Palestine	758	-2	7	-1	2%
Plano	750	0	15	0	7%
San Angelo	769	-3	-9	-1	-6%
San Antonio	780-782	-2	19	-1	8%
Texarkana	755	-3	-15	-1	-8%
Tyler	757	-1	-15	0	-7%
Victoria	779	-2	29	-1	12%
Waco	765-767	-3	-2	-1	-3%
Wichita Falls	763	-3	-16	-1	-9%
Woodson	764	-3	-3	-1	-3%

Area Modification Factors

Location	Zip	Mat.	Lab.	Equip.	Total Wtd. Avg.
Utah Average		1	-9	1	-3%
Clearfield	840	2	-3	1	0%
Green River	845	1	-7	0	-3%
Ogden	843-844	0	-19	0	-9%
Provo	846-847	2	-16	1	-6%
Salt Lake City	841	2	-1	1	1%
Vermont Average		1	-11	0	-5%
Albany	058	1	-16	0	-7%
Battleboro	053	1	-9	0	-4%
Beecher Falls	059	1	-19	0	-8%
Bennington	052	-1	-12	0	-6%
Burlington	054	3	5	1	4%
Montpelier	056	2	-10	1	-4%
Rutland	057	-1	-13	0	-7%
Springfield	051	-1	-11	0	-6%
White River Junction	050	1	-12	0	-5%
Virginia Average		0	-8	0	-4%
Abingdon	242	-2	-18	-1	-9%
Alexandria	220-223	3	18	1	10%
Charlottesville	229	1	-15	0	-6%
Chesapeake	233	0	-8	0	-4%
Culpeper	227	1	-12	0	-5%
Farmville	239	-2	-24	-1	-12%
Fredericksburg	224-225	1	-11	0	-5%
Galax	243	-2	-20	-1	-10%
Harrisonburg	228	1	-14	0	-6%
Lynchburg	245	-2	-17	-1	-9%
Norfolk	235-237	0	-4	0	-2%
Petersburg	238	-2	-5	-1	-3%
Radford	241	-1	-18	0	-9%
Reston	201	3	12	1	7%
Richmond	232	-1	5	0	2%
Roanoke	240	-1	-18	0	-9%
Staunton	244	0	-15	0	-7%
Tazewell	246	-3	-10	-1	-6%
Virginia Beach	234	0	-6	0	-3%
Williamsburg	230-231	0	-6	0	-3%
Winchester	226	0	9	0	4%
Washington Average		1	-2	1	0%
Clarkston	994	0	-18	0	-8%
Everett	982	2	2	1	2%
Olympia	985	2	-6	1	-2%
Pasco	993	0	2	0	1%
Seattle	980-981	3	21	1	11%
Spokane	990-992	0	-7	0	-3%
Tacoma	983-984	2	3	1	2%
Vancouver	986	2	4	1	3%

Location	Zip	Mat.	Lab.	Equip.	Total Wtd. Avg.
Wenatchee	988	1	-14	0	-6%
Yakima	989	0	-10	0	-5%
West Virginia Average		-2	-8	-1	-5%
Beckley	258-259	1	-11	0	-5%
Bluefield	247-248	-1	2	0	0%
Charleston	250-253	1	8	0	4%
Clarksburg	263-264	-3	-11	-1	-7%
Fairmont	266	0	-24	0	-11%
Huntington	255-257	-1	-7	0	-4%
Lewisburg	249	-2	-29	-1	-14%
Martinsburg	254	-1	-10	0	-5%
Morgantown	265	-3	-6	-1	-4%
New Martinsville	262	-2	-18	-1	-9%
Parkersburg	261	-3	5	-1	1%
Romney	267	-4	-10	-1	-7%
Sugar Grove	268	-3	-14	-1	-8%
Wheeling	260	-3	14	-1	5%
Wisconsin Average		-1	1	0	0%
Amery	540	0	-3	0	-1%
Beloit	535	0	10	0	5%
Clam Lake	545	-1	-17	0	-8%
Eau Claire	547	-1	-4	0	-2%
Green Bay	541-543	0	6	0	3%
La Crosse	546	-2	3	-1	0%
Ladysmith	548	-2	-1	-1	-2%
Madison	537	2	14	1	8%
Milwaukee	530-534	0	12	0	6%
Oshkosh	549	-1	9	0	4%
Portage	539	0	0	0	0%
Prairie du Chien	538	-2	-12	-1	-7%
Wausau	544	-1	-6	0	-3%
Wyoming Average		0	-1	0	-1%
Casper	826	-1	4	0	1%
Cheyenne/Laramie	820	1	-6	0	-2%
Gillette	827	-1	7	0	3%
Powell	824	0	-7	0	-3%
Rawlins	823	0	17	0	8%
Riverton	825	-1	-12	0	-6%
Rock Springs	829-831	0	2	0	1%
Sheridan	828	1	-8	0	-3%
Wheatland	822	0	-7	0	-3%
UNITED STATES TERRITORIES					
Guam		53	-21	-5	18%
Puerto Rico		2	-47	-5	-21%
VIRGIN ISLANDS (U.S.)					
St. Croix		18	-15	-4	2%
St. John		52	-15	-4	20%
St. Thomas		23	-15	-4	5%

Canadian Area Modification Factors


To find the cost in Canada in Canadian dollars, increase the costs in this book by the appropriate percentage listed below. These figures convert costs to Canadian dollars based on \$1.00 Canadian to \$0.76 U.S.

Location	Mat.	Lab.	Equip.	Total Wtd. Avg.
Alberta Average	26	-1	7	13%
Calgary	26	1	7	14%
Edmonton	25	2	7	14%
Fort McMurray	28	-7	7	12%
British Columbia Average	26	-15	7	7%
Fraser Valley	26	-16	7	6%
Okanagan	27	-18	7	6%
Vancouver	26	-11	7	9%
Manitoba Average	20	-22	5	0%
North Manitoba	20	-22	5	0%
Selkirk	20	-22	5	0%
South Manitoba	20	-22	5	0%
Winnipeg	20	-22	5	0%
New Brunswick	16	-47	3	-13%
Moncton	16	-47	3	-13%

Location	Mat.	Lab.	Equip.	Total Wtd. Avg.
Newfoundland/Labrador	19	-29	4	-3%
Nova Scotia Average	17	-36	4	-8%
Amherst	16	-36	3	-8%
Nova Scotia	17	-35	4	-7%
Sydney	17	-37	4	-8%
Ontario Average	22	-11	5	7%
London	22	-10	5	7%
Thunder Bay	24	-14	6	6%
Toronto	21	-9	5	7%
Quebec Average	19	-24	4	-1%
Montreal	19	-24	4	-1%
Quebec City	19	-24	4	-1%
Saskatchewan Average	23	-18	5	4%
La Ronge	24	-21	6	3%
Prince Albert	22	-20	5	2%
Saskatoon	22	-14	5	5%

Demolition

2



Nearly all home improvement projects require some breaking out and removing of existing materials and disposal of debris. Most will require protection of adjacent surfaces, taking safety precautions (such as setting up barricades), closing off doorways or windows, and normal cleanup. The demolition figures in this chapter include these tasks and will apply on most home improvement jobs that don't involve unusual conditions or complications. Costs will be higher when access to the work is limited, when your crew doesn't have complete control of the construction site, or when debris must be moved longer distances or around obstacles. All figures assume that debris is piled on site or in a bin. Add the cost of hauling to the nearest disposal site and tippage charges, if required. No salvage value is assumed except as noted.

Many of the following chapters include estimated costs to remove the old and replace with new materials of a similar description. For example, you'll find costs for removing shingles and replacing shingles in the roofing chapter. That's appropriate because they're part of the same task and usually performed by the same contractor. The estimates in this chapter are for demolition only and don't consider the cost of replacing what has been removed.

Of all construction tasks, demolition is probably the most difficult to estimate with any certainty. You're never sure what's in a wall to be demolished until the job begins. That's why it's best to exclude from your demolition bid what isn't in your estimate. Use the checklist to the right to help identify potential problems before they develop.

Demolition Checklist

- ☐ Can you anticipate any problem getting a demolition permit for this job?
- ☐ Is there a noise ordinance which will limit hours of operation or selection of equipment?
- ☐ Can the debris box be located close to the work?
- ☐ Can a trencher get to the job site?
- ☐ Is the site accessible to wheeled equipment?
- ☐ Will the debris have to be hand-carried to the roll-off box or gondola?
- ☐ Is there a direct route from the demolition site to the debris box?
- ☐ Will you need to re-route any plumbing, electrical, phone or gas lines?
- ☐ Will you need to remove and replace lawn sprinklers?
- ☐ Will you need to cut back or remove any bushes or trees?
- ☐ Will you have to remove and re-install a fence or gate?
- ☐ Does a septic tank or drain field extend into the site of construction?
- ☐ Can (must) materials generated from your project be recycled or salvaged?

	Day	Week	Month
Equipment Rental for Demolition.			
Air compressors, wheel-mounted			
16 CFM, shop type, electric	79.00	184.00	549.00
30 CFM, shop type, electric	84.00	252.00	756.00
80 CFM, shop type, electric	98.00	299.00	893.00
100 CFM, gasoline unit	134.00	399.00	1,120.00
125 CFM, gasoline unit	165.00	498.00	1,490.00
Paving breakers (no bits included) hand-held, pneumatic			
To 40 lb	52.00	166.00	366.00
41 - 55 lb	83.00	297.00	624.00
56 - 70 lb	69.00	239.00	472.00
71 - 90 lb	119.00	282.00	605.00
Paving breakers jackhammer bits			
Moil points, 15" to 18"	6.00	14.00	30.00
Chisels, 3"	7.00	17.00	44.00
Clay spades, 5-1/2"	10.00	23.00	62.00
Asphalt cutters, 5"	8.00	24.00	51.00
Pneumatic chippers, medium weight, 10 lb	35.00	102.00	284.00
Air hose rental, 50 LF section			
5/8" air hose	10.00	19.00	46.00
3/4" air hose	12.00	25.00	58.00
1" air hose	15.00	34.00	70.00
1-1/2" air hose	23.00	67.00	172.00
Dump truck rental rate plus mileage			
3 CY	430.00	1,130.00	2,200.00
5 CY	455.00	1,200.00	3,470.00
Hammer rental			
Electric brute breaker	65.00	260.00	814.00
Gas breaker	89.00	358.00	972.00
Demolition hammer, electric	58.00	323.00	650.00
Roto hammer, 7/8", electric	65.00	260.00	704.00
Roto hammer, 1-1/2", electric	62.00	248.00	600.00
Stump grinder, 9 HP	160.00	640.00	1,700.00
Brush chipper, trailer-mounted 40 HP	307.00	899.00	2,240.00
Chain saw, 18", gasoline	67.00	268.00	775.00
Chop saw, 14", electric	41.00	164.00	478.00
Backhoe/loader, wheel-mounted, diesel or gasoline			
1/2 CY bucket capacity, 55 HP	259.00	796.00	1,840.00
1 CY bucket capacity, 65 HP	240.00	740.00	2,230.00
1-1/4 CY bucket capacity, 75 HP	234.00	787.00	2,180.00
1-1/2 CY bucket capacity, 100 HP	417.00	1,150.00	2,940.00
Wheel loader, front-end load and dump, diesel			
3/4 CY bucket, 4WD, articulated	203.00	692.00	2,090.00
1 CY bucket, 4WD, articulated	358.00	1,040.00	2,920.00
2 CY bucket, 4WD, articulated	583.00	1,650.00	4,360.00

	Craft@Hrs	Unit	Material	Labor	Total	Sell
Sitework Demolition						
Debris disposal and removal. Tipping charges for solid waste disposal at the dump vary from \$30 to \$120 per ton. For planning purposes, estimate waste disposal at \$75 per ton, plus the hauling cost. Call the dump or trash disposal company for actual charges. Typical costs are shown below.						
Dumpster, 3 CY trash bin, emptied weekly	—	Mo	—	—	330.00	—
Dumpster, 40 CY solid waste bin (lumber, drywall, roofing)						
Hauling cost, per load	—	Ea	—	—	230.00	—
Add to per load charge, per ton	—	Ton	—	—	55.00	—
Low-boy, 14 CY solid waste container (asphalt, dirt, masonry, concrete)						
Hauling cost, per load (7 CY maximum load)	—	Ea	—	—	230.00	—
Add to per load charge, per ton	—	Ton	—	—	55.00	—
Recycler fees. Recycling construction waste materials can substantially reduce disposal costs. Recycling charges vary from \$95 to \$120 per load, depending on the type of material and the size of the load. Add the cost of hauling to a recycling facility.						
Greenwaste	—	Ton	—	—	30.00	—
Asphalt, per load (7 CY)	—	Ea	—	—	100.00	—
Concrete, masonry or rock, per load (7 CY)	—	Ea	—	—	100.00	—
Dirt, per load (7 CY)	—	Ea	—	—	100.00	—
Mixed loads, per load (7 CY)	—	Ea	—	—	100.00	—
Bush and tree removal. Includes cutting into manageable pieces with power hand tools and dumping debris in a trash bin on site. Add the cost of power equipment rental, if needed.						
Shrubs and bushes, including stump removal.						
4' high, per each	BL@.750	Ea	—	22.90	22.90	38.90
Tree removal. Costs will vary widely depending on the condition, size, location and accessibility of the tree. Includes cutting into manageable pieces with power hand tools and dumping debris in a trash bin or chipper on site. Does not include stump removal or grinding. Add the cost of power equipment rental, bucket truck, and other specialized equipment if needed. Large shade tree removal may require a crew of 5 or more. Use \$2,000 as a minimum job charge for trees with a 36" diameter trunk and larger.						
8" to 12" diameter trunk	B8@2.50	Ea	—	92.10	92.10	157.00
13" to 18" diameter trunk	B8@3.50	Ea	—	129.00	129.00	219.00
19" to 24" diameter trunk	B8@5.50	Ea	—	203.00	203.00	345.00
25" to 36" diameter trunk	B8@7.00	Ea	—	258.00	258.00	439.00
Stump grinding, using a 9 HP wheel-mounted stump grinder						
6" to 10" diameter stump	B8@.800	Ea	—	29.50	29.50	50.20
11" to 14" diameter stump	B8@1.04	Ea	—	38.30	38.30	65.10
15" to 18" diameter stump	B8@1.30	Ea	—	47.90	47.90	81.40
19" to 24" diameter stump	B8@1.50	Ea	—	55.20	55.20	93.80
Fencing demolition. Remove chain link fence and cemented posts for disposal. These figures assume fencing is removed by cutting ties at posts and rails and rolling the fabric. These rolls can be heavy. A larger crew will be needed on larger jobs.						
To 6' high	BL@.100	LF	—	3.06	3.06	5.20
Remove chain link fence and cemented posts for salvage,						
To 6' high	BL@.120	LF	—	3.67	3.67	6.24
Remove board fence and cemented posts for disposal,						
To 6' high	BL@.100	LF	—	3.06	3.06	5.20

	Craft@Hrs	Unit	Material	Labor	Total	Sell
Building Demolition						
Single-story room demolition. Includes breaking out a concrete or masonry foundation using pneumatic tools, breaking materials into manageable pieces with hand tools and handling debris to a trash bin on site. Includes the cost of erecting a temporary vapor barrier to seal the wall opening in the existing structure. Add the cost of wall patching on the remaining structure. Add the cost of equipment rental.						
Demolish a wood-frame addition built on a concrete slab, including grade beams. Use these figures to estimate the cost of demolishing an attached garage.						
Per square foot of floor area demolished	BL@.100	SF	—	3.06	3.06	5.20
Demolish a wood-frame addition built on a conventional foundation, including wood deck, stairs to grade, and the concrete or concrete block foundation.						
Per square foot of floor area demolished	BL@.120	SF	—	3.67	3.67	6.24
Detached garage demolition. Includes breaking materials into manageable pieces with hand tools and handling debris to a trash bin on site. No slab or foundation demolition included. No salvage of materials assumed.						
Frame garage with wood or aluminum siding						
One-car garage, to 10' wide by 22' deep	BL@16.5	Ea	—	504.00	504.00	857.00
Two-car garage, to 20' wide by 28' deep	BL@23.0	Ea	—	703.00	703.00	1,200.00
Frame garage with stucco siding						
One-car garage to 12' wide by 22' deep	BL@23.5	Ea	—	718.00	718.00	1,220.00
One-car to 16' wide by 22' deep	BL@28.5	Ea	—	871.00	871.00	1,480.00
Two-car garage to 22' wide by 28' deep	BL@42.5	Ea	—	1,300.00	1,300.00	2,210.00
Brick or block garage						
One-car garage to 12' wide by 22' deep	BL@23.0	Ea	—	703.00	703.00	1,200.00
One-car garage to 16' wide by 22' deep	BL@28.0	Ea	—	855.00	855.00	1,450.00
Two-car garage to 20' wide by 22' deep	BL@33.0	Ea	—	1,010.00	1,010.00	1,720.00
Gutting a building. Interior finish stripped back to the structural walls. Building structure to remain. No allowance for salvage value. These costs include loading and hauling up to 6 miles but no dump fees. Costs are per square foot of floor area based on 8' ceiling height. Add the cost of equipment rental. Figures in parentheses show the approximate "loose" volume of materials after demolition.						
Residential building (125 SF per CY)	BL@.100	SF	—	3.06	3.06	5.20
Building Component Demolition. Itemized costs for demolition of building components when building is being remodeled, repaired or rehabilitated and not completely demolished. Costs include protecting adjacent areas and normal clean-up. Costs are to break out the items listed and pile debris on site or in a bin.						
Brick wall demolition. Cost per square foot removed measured on one face. Removed using a pneumatic breaker. Add the cost of equipment rental. Figures in parentheses show the volume before and after demolition and weight of the materials after demolition.						
4" thick walls (60 SF per CY and 36 lbs. per SF)	BL@.061	SF	—	1.86	1.86	3.16
8" thick walls (30 SF per CY and 72 lbs. per SF)	BL@.110	SF	—	3.36	3.36	5.71

	Craft@Hrs	Unit	Material	Labor	Total	Sell
Brick sidewalk demolition. Cost per square foot removed. Add the cost of Bobcat rental. Larger jobs will require a crew of 2 or more. Figures in parentheses show the volume before and after demolition and weight of materials after demolition.						
2-1/2" thick brick on sand base, no mortar bed, removed using hand tools (100 SF per CY and 28 lbs. per SF)	BL@.010	SF	—	.31	.31	.53
Brick pavers up to 4-1/2" thick with mortar bed, removed using a pneumatic breaker (55 SF per CY and 50 lbs. per SF)	BL@.050	SF	—	1.53	1.53	2.60
Concrete masonry wall demolition. Cost per square foot of wall removed measured on one side. Removed using a pneumatic breaker. Add the cost of equipment rental. Figures in parentheses show the volume before and after demolition and weight of materials after demolition.						
4" thick walls (60 SF per CY and 19 lbs. per SF)	BL@.066	SF	—	2.02	2.02	3.43
6" thick walls (40 SF per CY and 28 lbs. per SF)	BL@.075	SF	—	2.29	2.29	3.89
8" thick walls (30 SF per CY and 34 lbs. per SF)	BL@.098	SF	—	2.99	2.99	5.08
12" thick walls (20 SF per CY and 46 lbs. per SF)	BL@.140	SF	—	4.28	4.28	7.28
Reinforced or grouted walls add	—	%	—	—	50.0	—
Concrete foundation demolition (footings). Steel reinforced, removed using a pneumatic breaker. Add the cost of equipment rental. Figures in parentheses show the volume before and after demolition.						
Cost per CY (.75 CY per CY)	BL@3.96	CY	—	121.00	121.00	206.00
Cost per LF with width and depth as shown						
6" W x 12" D (35 LF per CY)	BL@.075	LF	—	2.29	2.29	3.89
8" W x 12" D (30 LF per CY)	BL@.098	LF	—	2.99	2.99	5.08
8" W x 16" D (20 LF per CY)	BL@.133	LF	—	4.06	4.06	6.90
8" W x 18" D (18 LF per CY)	BL@.147	LF	—	4.49	4.49	7.63
10" W x 12" D (21 LF per CY)	BL@.121	LF	—	3.70	3.70	6.29
10" W x 16" D (16 LF per CY)	BL@.165	LF	—	5.04	5.04	8.57
10" W x 18" D (14 LF per CY)	BL@.185	LF	—	5.65	5.65	9.61
12" W x 12" D (20 LF per CY)	BL@.147	LF	—	4.49	4.49	7.63
12" W x 16" D (13 LF per CY)	BL@.196	LF	—	5.99	5.99	10.20
12" W x 20" D (11 LF per CY)	BL@.245	LF	—	7.48	7.48	12.70
12" W x 24" D (9 LF per CY)	BL@.294	LF	—	8.98	8.98	15.30
Concrete sidewalk demolition. To 4" thick, cost per SF removed. Figures in parentheses show the volume before and after demolition.						
Non-reinforced, removed by hand with sledge (60 SF per CY)	BL@.050	SF	—	1.53	1.53	2.60
Reinforced with wire mesh. Mesh cut into manageable pieces, then removed using pneumatic breaker. Add the cost of equipment rental. (55 SF per CY)	BL@.060	SF	—	1.83	1.83	3.11

	Craft@Hrs	Unit	Material	Labor	Total	Sell
Porch and deck demolition. Includes breaking materials into manageable pieces with hand tools and handling debris to a trash bin on site.						
Demolish an enclosed wood-frame porch. Includes breaking out the concrete or masonry pier foundation. Per square foot of floor.						
One story	BL@.250	SF	—	7.64	7.64	13.00
Two story	BL@.225	SF	—	6.87	6.87	11.70
Three story	BL@.196	SF	—	5.99	5.99	10.20
Demolish a screened porch built on a concrete slab. Includes demolition of one concrete or wood frame step to grade. Per square foot of floor area.						
Porch and one step (no slab demolition)	BL@.100	SF	—	3.06	3.06	5.20
Demolish a wood deck with railing or kneewall. Includes demolition of the wood deck and up to 7 steps to grade.						
Deck to 150 SF	BL@18.5	Ea	—	565.00	565.00	961.00
Add per SF for deck over 150 SF	BL@.100	SF	—	3.06	3.06	5.20

Concrete slab demolition. Break up and remove concrete slab using a compressor and pneumatic hammer. Includes loosening concrete with a pick and handling debris to a trash bin on site. Costs for demolition of reinforced concrete slab include burning off rebars with an acetylene torch. Add the rental cost of a compressor, pneumatic hammer and a torch, as required. Figures in parentheses show the volume before and after demolition.

4" non-reinforced concrete (60 SF per CY)	BL@.057	SF	—	1.74	1.74	2.96
4" reinforced concrete (60 SF per CY)	BL@.071	SF	—	2.17	2.17	3.69
6" non-reinforced concrete (45 SF per CY)	BL@.083	SF	—	2.54	2.54	4.32
6" reinforced concrete (45 SF per CY)	BL@.103	SF	—	3.15	3.15	5.36
8" non-reinforced concrete (30 SF per CY)	BL@.109	SF	—	3.33	3.33	5.66
8" reinforced concrete (30 SF per CY)	BL@.122	SF	—	3.73	3.73	6.34

Asphalt pavement demolition. Asphaltic concrete (bituminous) 3" thick, removed using a pneumatic spade. Add the cost of equipment rental and dump fees. Figures in parentheses show the volume before and after demolition and weight of debris.

Break up and shovel on to a truck (4 SY per CY and 660 lbs. per SY)	BL@.140	SY	—	4.28	4.28	7.28
--	---------	----	---	------	------	------

Concrete wall demolition. Steel reinforced, removed using a compressor and pneumatic breaker. Add the cost of equipment rental. Figures in parentheses show the volume before and after demolition.

Cost per CY (1.33 CY per CY)	BL@4.76	CY	—	145.00	145.00	247.00
Cost per SF with thickness as shown						
3" wall thickness (80 SF per CY)	BL@.045	SF	—	1.37	1.37	2.33
4" wall thickness (55 SF per CY)	BL@.058	SF	—	1.77	1.77	3.01
5" wall thickness (45 SF per CY)	BL@.075	SF	—	2.29	2.29	3.89
6" wall thickness (40 SF per CY)	BL@.090	SF	—	2.75	2.75	4.68
8" wall thickness (30 SF per CY)	BL@.120	SF	—	3.67	3.67	6.24
10" wall thickness (25 SF per CY)	BL@.147	SF	—	4.49	4.49	7.63
12" wall thickness (20 SF per CY)	BL@.176	SF	—	5.38	5.38	9.15

	Craft@Hrs	Unit	Material	Labor	Total	Sell
Wood Framing Demolition. Typical costs for demolition of wood frame structural components using hand tools. Normal center-to-center spacing (12" thru 24" OC) is assumed. Includes breaking materials into manageable pieces with hand tools and handling debris to a trash bin on site. Costs include removal of Romex cable as necessary, protecting adjacent areas, and normal clean-up. Costs do not include temporary shoring to support structural elements above or adjacent to the work area. (Add for demolition of flooring, roofing, sheathing, etc.) Figures in parentheses give the approximate "loose" volume and weight of the materials after being demolished.						
Ceiling joist demolition. Per in-place SF of ceiling area removed.						
2" x 4" (720 SF per CY and 1.18 lbs. per SF)	BL@.009	SF	—	.27	.27	.46
2" x 6" (410 SF per CY and 1.76 lbs. per SF)	BL@.013	SF	—	.40	.40	.68
2" x 8" (290 SF per CY and 2.34 lbs. per SF)	BL@.018	SF	—	.55	.55	.94
2" x 10" (220 SF per CY and 2.94 lbs. per SF)	BL@.023	SF	—	.70	.70	1.19
2" x 12" (190 SF per CY and 3.52 lbs. per SF)	BL@.027	SF	—	.82	.82	1.39
Floor joist demolition. Per in-place SF of floor area removed.						
2" x 6" (290 SF per CY and 2.04 lbs. per SF)	BL@.016	SF	—	.49	.49	.83
2" x 8" (190 SF per CY and 2.72 lbs. per SF)	BL@.021	SF	—	.64	.64	1.09
2" x 10" (160 SF per CY and 3.42 lbs. per SF)	BL@.026	SF	—	.79	.79	1.34
2" x 12" (120 SF per CY and 4.10 lbs. per SF)	BL@.031	SF	—	.95	.95	1.62
Rafter demolition. Per in-place SF of actual roof area removed.						
2" x 4" (610 SF per CY and 1.42 lbs. per SF)	BL@.011	SF	—	.34	.34	.58
2" x 6" (360 SF per CY and 2.04 lbs. per SF)	BL@.016	SF	—	.49	.49	.83
2" x 8" (270 SF per CY and 2.68 lbs. per SF)	BL@.020	SF	—	.61	.61	1.04
2" x 10" (210 SF per CY and 3.36 lbs. per SF)	BL@.026	SF	—	.79	.79	1.34
2" x 12" (180 SF per CY and 3.94 lbs. per SF)	BL@.030	SF	—	.92	.92	1.56
Stud wall demolition. Interior or exterior, includes allowance for plates and blocking, per in-place SF of wall area removed, measured on one face.						
2" x 3" (430 SF per CY and 1.92 lbs. per SF)	BL@.013	SF	—	.40	.40	.68
2" x 4" (310 SF per CY and 2.58 lbs. per SF)	BL@.017	SF	—	.52	.52	.88
2" x 6" (190 SF per CY and 3.74 lbs. per SF)	BL@.025	SF	—	.76	.76	1.29
Stud wall demolition, salvage condition. Remove wall cover (nailed hardboard or fiberboard) from partition wall and salvage the stud framing. Per linear foot of stud wall.						
2" x 4" x 8', 16" on center	BL@.156	LF	—	4.77	4.77	8.11
Roof cover demolition. Includes breaking materials into manageable pieces with hand tools and handling debris to a trash bin on site. Cost per Sq or "square". (1 square = 100 square feet.) Figures in parentheses show the approximate "loose" volume and weight of materials after being demolished.						
Built-up, 5 ply (2.5 Sq per CY and 250 lbs per Sq)	BL@1.50	Sq	—	45.80	45.80	77.90
Shingles, asphalt, single layer (2.5 Sq per CY and 240 lbs per Sq)	BL@1.33	Sq	—	40.60	40.60	69.00
Shingles, asphalt, double layer (1.2 Sq per CY and 480 lbs per Sq)	BL@2.00	Sq	—	61.10	61.10	104.00
Shingles, slate. Weight ranges from 600 lbs. to 1,200 lbs. per Sq (1 Sq per CY and 900 lbs per Sq)	BL@1.79	Sq	—	54.70	54.70	93.00

	Craft@Hrs	Unit	Material	Labor	Total	Sell
Shingles, wood (1.7 Sq per CY and 400 lbs per Sq)	BL@2.02	Sq	—	61.70	61.70	105.00
Clay or concrete tile (.70 Sq per CY)	BL@1.65	Sq	—	50.40	50.40	85.70
Remove gravel stop or flashing	BL@.070	LF	—	2.14	2.14	3.64

Interior and exterior finish demolition. Includes breaking materials into manageable pieces with hand tools and handling debris to a trash bin on site. Figures in parentheses show the approximate "loose" volume and weight of the materials after being demolished. Demolition for disposal. No salvage of materials included.

Plywood sheathing, up to 1" thick, cost per in-place SF

(200 SF per CY and 2 lbs. per SF)	BL@.017	SF	—	.52	.52	.88
-----------------------------------	---------	----	---	-----	-----	-----

Wood board sheathing

(250 SF per CY and 2 lbs. per SF)	BL@.030	SF	—	.92	.92	1.56
-----------------------------------	---------	----	---	-----	-----	------

Metal siding, using hand tools

(200 SF per CY and 2 lbs. per SF)	BL@.027	SF	—	.82	.82	1.39
-----------------------------------	---------	----	---	-----	-----	------

Stucco on walls or soffits, cost per in-place SF, removed using hand tools

(150 SF per CY and 8 lbs. per SF)	BL@.036	SF	—	1.10	1.10	1.87
-----------------------------------	---------	----	---	------	------	------

Wallboard 1/2" thick, cost per in-place SF, removed using hand tools. Add 50% to labor costs for 1" wallboard.

Gypsum, walls or ceilings

(250 SF per CY and 2.3 lbs. per SF)	BL@.010	SF	—	.31	.31	.53
-------------------------------------	---------	----	---	-----	-----	-----

Including strip furring	BL@.015	SF	—	.46	.46	.78
-------------------------	---------	----	---	-----	-----	-----

Plywood or insulation board

(200 SF per CY and 2 lbs. per SF)	BL@.018	SF	—	.55	.55	.94
-----------------------------------	---------	----	---	-----	-----	-----

Insulation, fiberglass batts or rolls, cost per square foot removed

(500 SF per CY and .3 lb per SF)	BL@.003	SF	—	.09	.09	.15
----------------------------------	---------	----	---	-----	-----	-----

Plaster on walls, cost per square foot removed by hand

(150 SF per CY and 8 lbs. per SF)	BL@.015	SF	—	.46	.46	.78
-----------------------------------	---------	----	---	-----	-----	-----

Remove baseboard molding

Single member base, no salvage	BL@.022	LF	—	.67	.67	1.14
--------------------------------	---------	----	---	-----	-----	------

Base and base shoe, no salvage	BL@.038	LF	—	1.16	1.16	1.97
--------------------------------	---------	----	---	------	------	------

Remove and salvage single member base	BL@.025	LF	—	.76	.76	1.29
---------------------------------------	---------	----	---	-----	-----	------

Remove and salvage base and base shoe	BL@.044	LF	—	1.34	1.34	2.28
---------------------------------------	---------	----	---	------	------	------

Ceiling demolition. Knock down with hand tools at heights to 9' and handle debris to a trash bin on site. Building structure to remain. No allowance for salvage value. Costs shown are per square foot of ceiling. Figures in parentheses show the approximate "loose" volume after demolition.

Plaster ceiling (typically 175 to 200 SF per CY)

Including lath and furring	BL@.025	SF	—	.76	.76	1.29
----------------------------	---------	----	---	-----	-----	------

Including suspended grid	BL@.020	SF	—	.61	.61	1.04
--------------------------	---------	----	---	-----	-----	------

Acoustic tile ceiling (typically 200 to 250 SF per CY)

Including suspended grid	BL@.010	SF	—	.31	.31	.53
--------------------------	---------	----	---	-----	-----	-----

Including grid in salvage condition	BL@.019	SF	—	.58	.58	.99
-------------------------------------	---------	----	---	-----	-----	-----

Tile glued or stapled to ceiling	BL@.015	SF	—	.46	.46	.78
----------------------------------	---------	----	---	-----	-----	-----

Tile on strip furring, including furring	BL@.025	SF	—	.76	.76	1.29
--	---------	----	---	-----	-----	------

Drywall ceiling (typically 250 to 300 SF per CY)

Nailed or attached with screws						
--------------------------------	--	--	--	--	--	--

to joists	BL@.010	SF	—	.31	.31	.53
-----------	---------	----	---	-----	-----	-----

	Craft@Hrs	Unit	Material	Labor	Total	Sell
Floor cover demolition. Includes breaking materials into manageable pieces with hand tools and handling debris to a trash bin on site. Cost per square yard of floor removed. (1 square yard = 9 square feet.) Figures in parentheses show the approximate "loose" volume and weight of the materials after demolition.						
Ceramic tile (25 SY per CY and 34 lbs. per SY)	BL@.263	SY	—	8.03	8.03	13.70
Hardwood, nailed (25 SY per CY and 18 lbs. per SY)	BL@.290	SY	—	8.86	8.86	15.10
Hardwood, glued (25 SY per CY and 18 lbs. per SY)	BL@.503	SY	—	15.40	15.40	26.20
Linoleum, sheet (30 SY per CY and 3 lbs. per SY)	BL@.056	SY	—	1.71	1.71	2.91
Resilient tile (30 SY per CY and 3 lbs. per SY)	BL@.300	SY	—	9.17	9.17	15.60
Terrazzo (25 SY per CY and 34 lbs. per SY)	BL@.286	SY	—	8.74	8.74	14.90
Carpet on tack strip (40 SY per CY and 5 lbs. per SY)	BL@.028	SY	—	.86	.86	1.46
Glue-down carpet with rubber backing (35 SY per CY and 1.7 lbs. per SY)	BL@.160	SY	—	4.89	4.89	8.31
Add for each LF of room perimeter	BL@.008	LF	—	.24	.24	.41
Carpet pad (35 SY per CY and 1.7 lbs. per SY)	BL@.014	SY	—	.43	.43	.73
Removal of interior items. Includes breaking materials into manageable pieces with hand tools and handling debris to a trash bin on site. Items removed in salvageable condition do not include an allowance for salvage value. Figures in parentheses give the approximate "loose" volume of the materials after demolition. Removed in non-salvageable condition (demolished) except as noted.						
Windows, typical cost to remove window, frame and hardware, cost per SF of window						
Metal (36 SF per CY)	BL@.058	SF	—	1.77	1.77	3.01
Wood (36 SF per CY)	BL@.063	SF	—	1.92	1.92	3.26
Wood stairs, cost per in-place SF or LF						
Risers (25 SF per CY)	BL@.116	SF	—	3.54	3.54	6.02
Landings (50 SF per CY)	BL@.021	SF	—	.64	.64	1.09
Handrails (100 LF per CY)	BL@.044	LF	—	1.34	1.34	2.28
Posts (200 LF per CY)	BL@.075	LF	—	2.29	2.29	3.89
Hollow metal door and frame in a masonry wall. (2 doors per CY)						
Single door to 4' x 7'	BL@1.00	Ea	—	30.60	30.60	52.00
Two doors, per opening to 8' x 7'	BL@1.50	Ea	—	45.80	45.80	77.90
Wood door and frame in a wood frame wall (2 doors per CY)						
Single door to 4' x 7'	BL@.500	Ea	—	15.30	15.30	26.00
Two doors, per opening to 8' x 7'	BL@.750	Ea	—	22.90	22.90	38.90
Metal door and frame in masonry wall, salvage condition						
Hollow metal door to 4' x 7'	BL@2.00	Ea	—	61.10	61.10	104.00
Wood door to 4' x 7'	BL@1.00	Ea	—	30.60	30.60	52.00

Online Preview

Index

- A**
- Abbreviations..... 17
 - ABS pipe 408
 - Absorber, shock
water surge..... 407
 - ABTCO 251
 - AC cable..... 419
 - AC quiet rocker switch
Decora 434
 - AC quiet toggle switch..... 434
 - Access door..... 248
 - Access doors
foundation..... 88
 - Accessories, ridge vents ... 90
 - Acid cleaning
masonry..... 115
 - wash 50, 115
 - Acid wash, manhours 466
 - Acknowledgments 2
 - Acoustic ceiling texture
labor 469
 - Acoustic roll-on..... 493
 - Acoustic tile
demolition 34, 315
 - Acoustical ceiling
demolition 254
 - panel..... 255-257
 - patch..... 245
 - suspended..... 256
 - texture touch-up kit..... 244
 - tile adhesive 254
 - Acrylic
latex paint..... 492
 - mirrored sheet 171
 - mortar admix 307
 - paint..... 40
 - roof coating..... 137
 - sheet..... 171
 - skylights 173
 - stain 487
 - suspended lighting
panel..... 258
 - tape 291
 - wood filler 281
 - Actuating devices,
garage doors 225
 - Adapter, box 421
 - Additive
feather edge 286
 - resilient flooring 285
 - Additives
coloring..... 47
 - concrete..... 47
 - perlite paint texturing 493
 - Adhesive
acoustical ceiling tile 254
 - bond 133
 - cold process 133
 - cove base 290
 - field 134
 - flooring..... 282
 - marble & granite..... 306
 - modified bitumen 133
 - nozzle 291
 - primer 282
 - resilient tile 290
 - sheet flooring..... 290
 - spray..... 249
 - tile..... 293-294
 - vinyl tile..... 290
 - white silicone 171
 - wood flooring 282
 - Adhesive caulk,
ceramic tile 307
 - Adhesive remover 282
 - flooring..... 285
 - Admix, acrylic mortar..... 307
 - Admixtures
coloring 47
 - concrete..... 47
 - Aggregate
base 40, 46
 - roofing 132
 - Aggregate sealer..... 495
 - Air compressor, rental 28
 - Air conditioner 397
 - Air gap 334
 - cover..... 334
 - Air hose, rental 28
 - Air mover 539
 - Air scrubber 539
 - Alkyd gloss enamel 493
 - All-season storm
doors 204-205
 - All-season storm
doors, triple-track..... 204
 - Alpine ceiling panel 257
 - Aluminum
door bottom 196
 - drip edge 141
 - fascia 114
 - foil 88
 - patio cover..... 459
 - patio doors..... 215
 - roll flashing 141
 - roof coating..... 137
 - screen rolls 168
 - siding 113
 - siding removal..... 106
 - siding repair..... 105
 - soffit..... 114
 - storm windows..... 165
 - thermal door sill..... 195
 - windows, fixed 162
 - Aluminum conduit
threaded 431
 - Aluminum siding 93
 - painting..... 482
 - Aluminum wiring 411
 - Amber shellac..... 490
 - American Flexible
Conduit..... 419
 - American Marazzi..... 296-298
 - American Marazzi..... 303
 - American Molding..... 262
 - American Shower &
Bath 337, 357-358
 - American Standard 330,
333-334, 338, 353-354,
360-363, 366-372, 385-386
 - Anchor clip..... 458
 - Anchor, foundation 512
 - Anchor, hold-down 512
 - Andersen 214, 216
 - Angle flashing..... 142
 - Angle bay windows..... 164
 - Angle valve 364
 - Ann Arbor birch paneling ... 252
 - Anti-fracture
membrane kit..... 307
 - membrane water-
proofing 305
 - tile membrane..... 305
 - Antimicrobial..... 536
 - Anti-siphon toilet fill valve... 364
 - Appliance receptacle..... 435
 - Appliance removal..... 530
 - Appliances
connect..... 417
 - disconnect 417
 - kitchen, removal 315
 - new connection 417
 - remove & replace cable... 417
 - Apron
roof 143
 - whirlpool tub 354
 - Aqua Mix 307
 - Aqua-Tough tile
underlayment..... 295
 - Arch, bullnose drywall 247
 - Architectural laminate
shingles 130
 - Area modification factors... 18
 - Area modification factors,
Canadian 26
 - Area walls, sheet metal... 389
 - Ariston 407
 - Arlington Industries..... 422
 - Armstrong..... 255-257,
285-291, 293
 - Asceri Hi-Arc lavatory
faucet..... 373
 - Ashland sink 329
 - Asphalt
base..... 51
 - fiberglass shingles 130
 - paving 51
 - paving, demolition 32, 51
 - recycling 29
 - Asphalt roofing 132
 - built-up..... 132
 - emulsion 133
 - fabric..... 131
 - saturated cotton roof
patch..... 136
 - SEBS 135
 - Asphalt shingles
fiberglass 131
 - repair 130
 - Astragal, T-..... 194
 - Attachments, skid steer
equipment..... 39
 - Attic conversions 57
 - Attic fans
belt drive..... 91
 - Attic ventilation 83
 - Attic vents 91
 - Avenite counters..... 322
 - Awning, remove &
replace 106
 - Awning windows
aluminum 162
 - operators 166
 - vinyl-clad wood..... 160
 - B**
 - Bacharach kitchen
faucet..... 331
 - Backer, tile 245
 - Backer tape, tile..... 249
 - Backerboard
ceramic tile 295
 - RhinoBoard 295
 - tile 295
 - Wonderboard..... 295
 - Backfill, concrete
excavation 40
 - Backhoe, rental 28
 - Backing, carpentry..... 73
 - Backplate, knob..... 326
 - Backsplash 322
 - Baffle, sound 340
 - Baffle light kit..... 440
 - Bahama pedestal
lavatory, bowl 366
 - Balance, sash..... 166
 - Ballista range hood..... 343
 - Baluster 455
 - deck rail..... 456
 - Balustrade
deck..... 456
 - Bamboo
flooring trim..... 280
 - hardwood flooring..... 280
 - plank flooring 280
 - Banner 329
 - Bar doors..... 209
 - Bar faucet..... 338
 - single handle 338
 - two-handle 338-339
 - Bar kit, QO load
center ground 440
 - Bar light fixture 441
 - Bar sink
composite 338
 - Manchester composite... 338
 - polycast 338
 - single bowl..... 337
 - stainless steel..... 338
 - Bar, towel 305,
385-386, 388
 - Barn & fence paint..... 496
 - Barrier, foil 88
 - Base
adhesive 290
 - asphalt..... 51
 - ceramic tile 295
 - lavatory 367
 - rubber wall..... 292
 - self-stick wall 293
 - shower, one-piece 358
 - slab 49
 - vinyl wall 292-293
 - Base cabinets..... 318
 - end panel..... 317
 - finished 320-321
 - oak..... 320
 - unfinished birch 317
 - unfinished oak 318
 - Base cap molding,
primed finger joint..... 260
 - Base corner molding 259
 - MDF primed..... 261
 - Base molding..... 263
 - colonial 263
 - combination 264
 - MDF colonial 261
 - paperwrap colonial 263
 - paperwrap ranch base ... 264
 - polystyrene colonial..... 264
 - primed finger joint..... 260
 - shoe..... 264
 - Victorian hardwood..... 259
 - Base plate cover, toilet.... 364
 - Base sheet, fiberglass.... 133
 - Base shoe molding,
primed finger joint..... 260
 - Base, wall
thermoplastic 292

Baseboard		Farmington	367	Bead, corner, spray		Board siding	
demolition	34	Laurel	368	adhesive	249	cedar	108
painting labor	468	Lucerne	369	Beaded baseboard		pine	108
Baseboard heater,		Memoirs	369	molding	259	repair	105
electric	404	Miami	369	Beaded Cape Cod plank	252	Board, cement	245
Baseboard molding		Minette	369	Beaded paneling	251	Bobcats	39
beaded	259	Murro	369	Beadex paper faced		Boiler, hydronic heating	
MDF	261	oval	368	metal	247	system	398
Basement doors	226	Ovalyn	368	Beams		Boiler breeching	401-403
Basement HVAC		Radiant	368	ceiling	68	Bolt	
restoration	92	Renaissance	367	collar	75	bolt kit	324
Basement post removal	63	round	368	grade	48	foundation	512
Basement storm		Seychelle	367-368	needle	62	toilet tank	364
windows	165	steel	368	Bed molding	263	Bolt-on A type	
Basin strainer, remove &		under counter mount	368	Bedding mortar,		universal hub	438
replace	352	wall hung	369	CustomFloat	306	Bolts, double-hung	
Basket strainer		wall hung, corner	369	Behr	487, 490, 492-495	window	166
garbage disposal	335	Bathroom vanity top	376	Bell wire	433	Bond adhesive	
junior	338	Bathrooms		Bemis Mfg	365-366	permanent	133
kitchen sink	335-336	additions	345	Berm	530	Bonding mortar	305-306
Basket strainer washer		conversions	346	Bestview Ltd	298	flexible	306
kitchen sink	336	exterior additions	348	Bevel siding		Bonding primer	
Basswood molding	259	floor plans	349	cedar	108	concrete	493
Bath accessories	385-388	in basements	347	pine	108	Bookcase, painting labor	468
black finish	388	in garages	348	western red cedar	108	Boone International	293
brass	386, 388	naming conventions	345	Beveled mirror bath bar	441	Bosch	407
brass & chrome	386, 388	space minimums	350	Bidet, hot & cold	362	Boston polish	491
ceramic & chrome	387	Bathtub	353	Bidet faucet set	362	Bottle jacks	62
ceramic tile	294	enameled steel	352	Bi-fold doors	219-221	Bow window roof	164-165
chrome	386-388	Princeton	353	hardware	221	Bowl, lavatory	366
chrome & brass	386	recessed	353	Metal	220	Bowl sink, utility	337
chrome & porcelain	386	removal	352	mirrored	221	Bowling alley wax	491
economy	386	soaker	353	Bilco	226	Box	428
nickel	388	surround	355	Bin, trash	29	2 gang weatherproof	
Bath accessory set,		surround kit	355	Biocidal coating	92	electrical	427
porcelain	305	three-piece tile kit	355	Birch doors	192,	drawn 2-device switch	425
Bath cabinet		tile kit	355	206-207, 210		drawn handy	424
framed	382	tile wall kit	355	Birch paneling	252	drawn octagon	425
stainless steel	382	Villager	353	Birdstop	140	multi gang switch	425
storage	383	wall surround kit	355	Bitumen adhesive,		non-metallic old work	
swing door	383	whirlpool	353-354	modified	133	switch	422
top lighted	383	Bathtub & shower		Bitumen cold process		non-metallic round	
Bath ceiling blower	378	units	356-357	adhesive, modified	133	conduit	428
Bath fan	378-380	Bathtub door	356	Bituminous roofing	132	rectangular weather-	
ceiling	381	bypass	355	Blank cover		proof	427
ceiling & wall	378	sliding	356	2 gang	428	Super Blue non-	
ceiling or wall	379	Bathtub filler	354	handy box	424	metallic three gang	422
chain-operated	380	Bathtub framing	395	weatherproof	428	Super Blue non-	
Designer Series	381	Bathtub wall	354	Blasting, dry ice	537	metallic two gang	422
exhaust	380	one-piece with shelf	354	Bleach kit, wood	487	welded square	425
exhaust with heater	381	Bathtub, molded	352	Blinds, painting	481-482	Box adapter	421
exhaust with light	380	Bathtub, wall kit, three-		Block Furniture	529	Box cover	426
Heat-A-Lamp	381	piece	354	Block masonry painting	476	blank handy	424
QuietTest	380	Batt insulation	84	Block molding		finished	425
solitaire	381	Batten tileboard	251	corner	262	square surface	425
timer switch	382	Bay vent channel, rafter	88	rosette	259	Box for ceiling fan	425
Ultra Silent	379	Bay window roof	164	Blocking		pancake	425
vertical discharge	379	Bay windows	158, 164	fire	66	Box room contents	529
with heater, infrared	381	Bead		fireblocks	68	Boxes, cardboard	538
with light	380-381	bullnose corner	247	Blow-in cellulose		Brace plate installation	92
Bath heater		corner	248	insulation	85	Braces, wall	513
exhaust fan	381	drywall	248	Blue Board insulation	85	Bracing	
Heat-A-Lamp	381	drywall corner	247	Blueboard	245	carpentry	67
infrared bulb	381	glazing	170	Board		cripple wall	512
Bath light bar	441	inside corner	247	blue	245	temporary	67
Bath Unlimited	387-388	L-trim	248	forming	44	Bracket	
Bath vent kit	382	metal J-trim	248	sheathing	66	foundation	512
Bathrobe hook	385-386, 388	outside corner	247	Board insulation	80, 85	non-metallic low	
Bathroom accessories		plastic	248	fire resistance	80	voltage mounting	422
ceramic tile soap dish	304	tape on	247	polystyrene	80	Bracket, hanger, lavatory	369
towel bar, ceramic	305	Bead molding	263	polyurethane	80	Brass storm doors	205
Bathroom sink	367-369	primed finger joint	260			Brass Craft	334, 362, 364
cadet	368						
drop-in	367-368						

Breaker		Bull float, rental.....	39	coaxial	433	transition strip.....	292
arc fault, HomeLine	437	Bullnose		data communication	433	water extraction	531
GFCI	437	ceramic tile	301	fish through stud wall	417	Cartridge, disposal	340
ground fault interrupter		corner bead	247	flexible armored BX.....	419	Casement windows	164
plug-on circuit.....	440	corner tile.....	302	thermostat	433	lock handle	166
HomeLine	437	drywall arch	247	Type NM-B Romex		operator handle	166
main circuit	438	outside corner.....	247	sheathed	417-418	vinyl-clad wood.....	160
QO miniature circuit.....	439	plastic corner.....	247	Type UF-B sheathed	419	Casing	263
tandem circuit.....	439	Bulls Eye shellac	490	underground	419	aluminum siding	114
Breaker box, ground		Bumper, garage door	224	Cable coupling, EMT to		colonial	260
bar kit.....	440	Buried cable	419	non-metallic sheathed ..	424	colonial door.....	195
Breaker, paving, rental	28	Burn off paint labor.....	466	Cable snake flat wire		door	191, 206
Brick		Bush removal	29	fish tape	417	economy	265
cleaning	115	Bushing		Cadet Series bar faucet ..	338	paperwrap colonial	264
demolition	30	insulated metallic		Cafe doors	209	paperwrap ranch	265
painting.....	477-478	grounding	430	Calcium chloride.....	47	polystyrene	266
pointing.....	115	non-metallic reducer.....	420	Cambay vinyl sheet		polystyrene colonial.....	264
repointing.....	115	rigid or IMC reducing.....	430	flooring.....	287	polystyrene fluted	265
Brick masonry		thermoplastic		Cambria countertop.....	323	polystyrene ranch	265
painting labor.....	476	insulating	430	Can, ceiling light.....	440	prefinished colonial.....	264
Brick molding	195	Butcher's.....	491	Canopy, remove &		prefinished fluted	265
Brick molding set		BX cable, flexible		replace	106	ranch	260, 265
primed finger joint.....	260	armored	419	Cant strips	137	Casing, MDF	261
Brick paver tile	300	Bypass door	218	roofing	86	Caspian sheet vinyl	
Bridging, carpentry	65	accessories	219	Cap	146	flooring.....	286
Broan Manufacturing	344,	bathub	355	ceramic surface	302	Cast iron	
378-382		beveled mirror	218	chimney	146	pipe, remove &	
Brookfield cast iron		closet	218	PVC service entrance ..	422	replace	408
kitchen sink	330	hardware	222	service entrance	432	radiator, remove &	
Brookstone birch		mirrored	218-219	Cap molding, colonial.....	264	replace	398
paneling	252	shower	356	Cap sheet, roofing.....	133	water closet flange	364
Broom finish, concrete.....	49			Cap, post.....	456-457	Cast iron kitchen	
Brown coat plaster.....	114			Cape Cod plank.....	252	sink	329-330
Bruce	278, 282			Carbon monoxide alarm,		Cast molding	262
Brush		C		battery powered.....	436	chair rail	262
painting labor.....	468	Cabinet demolition, wet.....	534	Carborundum rub	50	Cast-in-place concrete	47
wire	50	Cabinet door	316	Cardboard boxes	538	Cat doors	216
Brush chipper, rental	28	Cabinet drawer front.....	316	Carflex liquid-tight		Catalina Lighting.....	443
Brushes		Cabinet hinge		flexible conduit.....	427	Caulk	
crow's foot	250	overlay	327	Carlton	420-422, 427-428	ceramic tile	307
drywall texture	250	self-closing	328	Carol Cable	433	ceramic tile adhesive.....	307
Bubble wrap	538	semi-concealed	328	Carpentry		removal.....	157
Buggies, rental	39	Cabinet knobs	324-326	backing and nailers	73	roof	136
Building dryout,		Cabinet trim	320	beams and girders	62	window exterior	157
interior work		Cabinets		bridging or blocking	65	Caulking, manhours	466
appliances	516	base	317-318, 320-321	ceiling beams	68	Cedar	
basement	517	bath	382-383	ceiling joists	73	panels, sidewall	
ceiling	516	bathroom vanity	374-375	door openings.....	69	shingle	113
flooring.....	516	corner	383	dormer studs	76	roofing	137
furniture	516	door trim	316	fascia board	76	shingles	138
heavy items	517	end panel.....	316-318	fireblocks	68	siding	108-109
lamps	516	filler strip	318-319	floor joists	64-65	Cedar louvered vents	90
mud and debris	517	finished	320	floor repairs	62	Cedarmill	112
outlets.....	516	frameless	383	furring	72	Ceiling	
securing valuables	516	kitchen, unfinished		plates	67	beams.....	68
vents and registers.....	517	birch.....	317	posts	63	demolition	242
wall switches	516	medicine	382-384	rafters	75	demolition, wet	533
walls	516	oak.....	320-321	roof sheathing.....	77	joists	73
Building paper	87, 134	painting labor.....	469	roof trusses.....	76	painting	470
Building wire		pantry	319-321	room additions.....	64	painting manhours ..	469-470
type THHN.....	432	removal.....	315	sheathing	70	repair	244
Built-up girders, carpentry ..	62	trim	320	sill plates.....	64	staining manhours	470
Built-up roofing	132, 134	trim, finished	322	studs	66	texture manhours	469
Cold-Ap cement.....	133	utility	317-321	subflooring.....	66	tile adhesive	254
demolition	33	vanity	378	wall assemblies	70	touch-up kit.....	244
insulation	131-132	wall	317-321	wall framing	66	Ceiling and wall pane	
patch.....	131	Cable		window openings.....	69	FRP	253
tear-off	129	AC.....	419	Carpet.....	308	Ceiling fan	
torch and mop system.....	134	appliance connection.....	417	cleaning	532	bath	378
Bulb heater & fan,		appliance re-connect.....	417	demolition	35	bath heater & fan.....	381
Heat-A-Lamp	381	appliance, remove &		removal.....	278	gazebo.....	444
Bulkhead light fixture		replace	417	removal.....	531	QuieTTest.....	380
outdoor	443	BX.....	419	roller, extendable.....	291	San Marino	444

Ceiling fan box.....	425	Cement, roofing		Chimneys.....	399-403	Clip, anchor	458
non-metallic	422	cold process	133	A vent	402-403	Clips & screws.....	329
pancake	425	flashing	135	all fuels	402-403	Clips, drywall repair	249
Ceiling fixture.....	440	Kool Patch	135	aluminum	399-400	Closers, door	217
drum	441	lap roof	133	B vent	401	Closet, painting labor.....	470
fluorescent	441	rubber wet patch	135	base tee.....	400-402	Closet doors	210
flush mount	441	Wet Stick	135	C vent	399-400	bi-fold	219-220
glass globe	442	Center, HomeLine		cap	146	bypass	218
incandescent flush		indoor main lug load.....	437	double wall	401-402	mirrored bypass.....	218-219
mount	442	Central air conditioning....	397	double wall		Closet pole molding.....	263
mushroom flush		Central air filtration		insulated	402-403	Closure strips, horizontal... 141	
mount	442	retrofit, HEPA	398	elbow	400-403	CMU, painting.....	477
remove & replace	441	Central humidifier	397	flue	399-403	CO/ALR duplex	
Sunburst flush mount ...	442	Ceramic		flue rain cap.....	399	receptacle	435
swirl dome light	442	floor & wall.....	297	gas or propane	399-402	Coal furnace	404
Ceiling insulation		Ceramic tile		L vent	401-402	Coated glass fabric.....	136
batt and roll blanket.....	79	accessories	304	liner	399	yellow resin	136
Kraft-faced	79	accessory set	305	liner (flue) aluminum....	399	Coating	
loose-fill	79	adhesive	293	liner rain cap.....	399	elastomeric roof.....	137
R-value	79	adhesive caulk.....	307	masonry, repair	104	fiberglass roof	137
Ceiling latex paint.....	492	backer	295	rain cap	400-403	floor, epoxy.....	495
Ceiling lighting panel		backerboard	295	repairing earthquake		foundation and roof	129
acrylic	258	bullnose	301	damage	510	roof	137
styrene	258	bullnose corner	302	roof flashing	400-403	roof and foundation	129
Ceiling panel.....	256	caulk	307	single wall	399-400	weather-resistant	488
acoustical	256	demolition	35, 315	stack	401-402	wood	488
classic fine-textured.....	256	floor	295-298	storm collar	400-403	Coating kit	
fiberglass	257	floor warming system ...	305	supports & brackets	403	seam	291
Firecode Fifth Avenue ...	257	glazed	303	termination		corrosion	92
fissured	257	installation	293	assembly	400-403	Coatings	
fissured fire guard	256	mosaic accent	304	Chlorinated rubber paint... 496		concrete	495
Grenoble	256	mosaic octagon	304	C-hook, garage door	224	epoxy gloss	496
gypsum lay-in	257	Natura	296	Chop saw, rental	28	epoxy primer.....	496
mineral fiber	257	removal	278	Chrome light fixture	441	specialty	496
plain white	256	Saltillo	299	Circuit breaker		Coaxial cable	433
Prestige	256	sink rail	302	arc fault, HomeLine	437	wall plate	433
random textured	255	soap dish	304	GFCI	437	Coaxial F-connector	
Sahara	256	surface cap	302	ground fault interrupter		for RG6	433
suspended	255-257	surface cap corner	302	plug-on	440	Cobra Rigid ridge vent ... 145	
textured	257	threshold	301	HomeLine	437	Cofair Products.....	135
Ceiling repair	245	toilet tissue holder	304	main	438	Coffer dam	92
Ceiling texture	246	tool	291	main, all-in-one	438	Coil, kickplate	459
patch	245	toothbrush & tumbler		QO miniature	439	Cold process adhesive,	
popcorn patch.....	245	holder	305	tandem	439	modified bitumen	133
spray.....	244-245	wall	301, 303	Circular windows half		Cold process cement.....	133
touch-up kit.....	244	window sill	301	circle, vinyl	159	Collar beams, carpentry ... 75	
Ceiling tile	254	Ceramic tile definitions ... 276		Civic Square	290	Collar ties	75
acoustical	253	Ceramic tile flooring.....	276	Clamp		Colonial base molding ... 263	
tin design	254	tips on	277	ground rod	432	MDF	261
wood fiber	254	Chain link fence		Snap Strap PVC		paperwrap	263
Ceiling tile grid system		demolition	29	conduit	420	polystyrene	264
zero-clearance tile grid... 255		Chain saw, rental	28	wood floor.....	281	Colonial cap	
Ceiling tile, wet	533	Chain-operated wall		Clamp connector,		paperwrap molding.....	264
Ceiling wire hanging kit ... 255		exhaust fan	380	two-piece	419	Colonial casing	
Ceiling, suspended		Chair rail		Classic faucet handle	370	finger jointed	260
cross tee	255	cast polyurethane	262	Clay roofing tile.....	139	paperwrap	264
installation	254	Clearwood PS	266	Cleaning		polystyrene	264
main beam	255	MDF	261	after water extraction....	534	prefinished	264
wall molding.....	255	paperwrap	266	antimicrobial	536	Colonial crown	
CeilingMAX	255	polymer	263	brick	115	paperwrap molding.....	268
Ceilings, suspended	237	polystyrene	266	carpet	532	Colonial door casing.....	195
Cellar doors, steel	194	prefinished	266	HVAC	530	Colonial outside corner	
Cement		primed finger joint.....	260	masonry	115	molding	267
board	245	Chalk line, self chalking... 291		pressure wash	468	Colonial stop molding	269
coloring	47	Chandelier	442	stone	115	Colonial storm doors,	
joint compound	245	Channel vent, rafter bay ... 88		terra cotta	115	triple-track.....	205
mixer, rental	39	Chesapeake floor tile.....	289	Ultrasonic	530	Colonnade kitchen	
siding	113	Chime kit, door	436	Clear cedar siding	108	faucet.....	332
soffit, fiber	112			Clear wood		colorant, grout.....	307
tile	139			preservative	491	Coloring agents	
underlayment	285			protector	490	concrete	47, 49
white	114			Clearshield.....	488	Column, porch	455

Combination base molding.....264	ready-mix.....46	Conduit elbow 45-degree rigid steel429	Corner bead bullnose.....247
Combination coupling.....424	reinforcing steel.....44	rigid or IMC steel.....429	drywall.....247
Combination service entrance device.....438	repair.....513	Conduit fitting Carflex.....427	flex.....248
Combination service entrance load center437	retaining walls.....47	non-metallic.....421	inside.....247
Commercial Electric.....440	sawing.....50	Conduit hub, watertight...430	outside.....248
Communication cable, category 5E.....433	sealer.....495	Conduit installation confined area.....429	spray adhesive.....249
Composite kitchen sink...338	shingles.....140	Conduit locknut.....430	Corner block polyurethane.....262
bar.....338	sidewalk.....49	Conduit nipple.....431	Corner cabinet, frameless.....383
Beaumont.....331	slab demolition.....32	Conduit sill plate service entrance.....432	Corner entry shower kit...358
double bowl.....330	slabs.....49	Conduit strap.....431	Corner molding inside.....267
Forsyth.....330	specialty finishes.....50	Connector 90-degree flexible.....426	paperwrap outside.....267
Greenwich.....330	stain.....495	dishwasher.....340-341	polystyrene inside.....267
single bowl.....330	stamped finish.....50	EMT compression.....423	polystyrene outside.....267
60/40 bowl.....331	tile.....139	EMT offset screw.....423	prefinished inside.....267
Composition tile, vinyl.....289-290	tile roofing.....140	EMT set screw.....423	prefinished outside.....267
Compound glazing.....170	topping.....50	EMT-to-box offset compression.....424	Corner shelf, ceramic.....304
latex glazing.....170	walks.....49	flex screw-in.....426	Corner tape, flexible metal.....249
Compression conduit coupling, rigid or IMC430	wall demolition.....32	flex squeeze.....427	Corner trowel.....250
Compression connector EMT.....423	wall form.....43	non-metallic UF compression.....419	Cornices, painting.....480
EMT-to-box offset.....424	walls.....47	two-piece clamp.....419	Corrosion coatings.....92
non-metallic UF.....419	waterproofing sealer.....495	Containment dust.....536	Corrugated fiberglass.....140
Compression faucet repair.....352	Concrete & masonry waterproof.....495	mold.....536	CorStone.....330, 331
Compression inlet dishwasher connector...341	Concrete block demolition.....31	Contents.....3	Cost plus markup equals selling price.....7
Compressor, rental.....28	painting.....476-478	Continuous vents.....89	Cotton insulation.....87
Concrete additives.....47	Concrete conveyor, rental...39	Contractors Wardrobe.....359	Cotton roof patch asphalt saturated.....136
architectural.....47	Concrete deck patch built-up roofing.....131	Contractors, state license dryout.....515	Counter edge, oak.....268
bonding primer.....493	Concrete pier replacement.....63	mold remediation.....515	Counterflashing.....144
coatings.....495	Concrete saws, rental.....39	Control switch, fan.....382	Countertops.....322
coloring.....47	Conditioner, wood.....491	Convection heating, baseboard.....398	Corian.....322
curb.....44	Conduit Carflex liquid-tight.....427	Cooktop electric.....342	granite.....323
delivery charges.....46	EMT.....422	electric ceramic glass...342	laminated plastic.....323-324
driveways.....46	EMT, removal.....422	gas.....342	marble vanity.....376
embossed finish.....50	ENT.....427	Cooling system, patio.....458	miter bolt kit.....324
enamel.....495	flex appliance connection.....417	Copper formed flashing.....141	plastic laminate.....323
epoxy floor coating.....495	flexible aluminum.....426	roll flashing.....141	setting with adhesive.....294
expansion joints.....46	flexible steel.....426	window roofs.....164	setting with mortar.....294
exposed aggregate.....49	galvanized IMC.....429	Copper pipe DWV.....408	solid surface.....322
finishing.....50	GRS.....429	water.....408	stone, engineered.....323
flatwork.....40	IMC.....429	Copper step flashing.....141	tile.....295
floor painting labor.....474-475	installation, rigid.....429	Copper wire, type THHN.....432	Coupling, combination.....424
footings, demolition.....31	removal, rigid.....429	Copper wood preservative.....491	EMT to non-metallic sheathed cable.....424
form stripping.....43	Schedule 40 PVC.....420	Cord, disposal accessory kit.....340	non-metallic standard...421
forms.....42, 48	Schedule 80 PVC.....420	Corian countertops.....322	rigid conduit.....429
foundations.....48	Conduit body.....421	Cork roll.....293	rigid or IMC compression conduit430
grade beams.....48	PVC Type T.....421	tile flooring.....275	Cove and corner molding inside.....266-267
granite aggregate.....46	threaded aluminum.....431	tile, natural.....293	paperwrap.....266
grinding.....513	Conduit box adapter.....421	Corner MDF primed base.....261	Cove base adhesive.....290
grout mix.....46	cover, steel.....424, 426	plastic bullnose.....247	adhesive nozzle.....291
grouting.....50	installation.....424	Corner and cove molding inside.....266-267	Cove molding.....268
high early strength.....47	non-metallic round.....428	paperwrap.....266	spring.....268
joints.....46	steel.....425	prefinished.....267	Cover faucet hole.....335
keyway.....48	three-gang non- metallic.....422		patio, aluminum.....459
lightweight.....46	two-gang non- metallic.....422		Covers 2 gang blank.....428
mix.....46	Conduit bushing, rigid.....430		blank handy box.....424
patching.....50	Conduit clamp, Snap Strap PVC.....420		dual weatherproof lampholder.....428
planing.....513	Conduit connector 90-degree.....426		
plasticized.....47	flex.....427		
protective coating.....495	Conduit coupling rigid.....429-430		
pump mix.....46			
pumping.....39			

GFCI wet location receptacle.....	428	painting.....	475	wet materials.....	532	Door accessories bypass.....	219
horizontal duplex weatherproof recept.....	428	post & beam.....	452	windows.....	35, 156	Door bar.....	226
receptacle.....	428	post cap.....	457	wood framing.....	30	Door bell, wireless.....	436
steel conduit box ...	424, 426	posts.....	453, 456	DensArmor gypsum board.....	243	Door bottom aluminum & vinyl.....	196
switch.....	428	railing.....	455-456	DensShield tile backer.....	245	drip cap.....	196
weatherproof blank.....	428	railing, turned spindle ...	456	Dentil cast molding.....	262	Door casing.....	191, 206
Crack filler, siliconizer.....	136	repair.....	452	Dentil chair rail.....	262	colonial.....	195, 260
Crack repair.....	513	roof.....	455	Designer panel wallcovering.....	252	ranch.....	195
mesh.....	248	screws.....	459	Designer Series bath fan ...	381	ranch, pine.....	195
Craft codes.....	15	staining.....	475	Detaching membrane.....	308	Door chime builder's kit...	436
Crawlspace ventilation, free circulation area.....	82	stairs.....	458	Detector dual-ionization smoke....	436	Door closers.....	217
Cribbing.....	62	Deck & siding stain.....	487	smoke.....	436	hinge pin.....	217
Cripple wall.....	512	Deck Plus stain.....	487	Devoe Coatings.....	496	hydraulic.....	217
Cross bridging.....	65	Deck, roof removal.....	129	DeWalt.....	249	installation.....	217
Cross head cast molding.....	262	repair.....	129	De-watering.....	529	pneumatic.....	217
Crow's foot brush.....	250	walking.....	140	DeWitts.....	135	Door frame, painting labor.....	471
Crown molding paperwrap colonial.....	268	Deck, roofing, patching built-up.....	131-132	Difficulty factors, painting manhours.....	466	Door frames.....	194
Crown molding.....	259, 263	Decora AC quiet rocker switch.....	434	overhang.....	480	fire-rated.....	194
cabinet.....	320, 322	Decora wall plate, single gang.....	435	Diffuser fixture fluorescent.....	441	pocket.....	222
MDF.....	262	Deflect-O.....	382	Diffusers, duct, installation.....	397	removal.....	197
MDF ultralite.....	262	Dehumidifiers.....	538	Dimmer illuminated slide.....	436	Door grille.....	216
polystyrene.....	268	Delta.....	332-333, 354	incandescent slide.....	436	Door handles, patio.....	216
prefinished.....	268		370, 372-373	Dirt, recycling.....	29	Door hangers.....	222
primed finger joint.....	261	Demolition acoustic tile ceiling.....	315	Disconnect appliances.....	417	Door hardware.....	216
Crystalite countertop.....	323	acoustical ceiling ...	254, 315	distribution panel.....	437	track.....	222
Curb mount fixed skylights.....	173	asphalt paving.....	51	Dish, soap.....	304	Door hinge, remove.....	196
Curbs, concrete.....	44	baseboard.....	34	Dishwasher.....	341	Door installation.....	191
Cure-Seal concrete sealer.....	495	brick sidewalk.....	31	connector.....	340-341		206, 209
Curing and sealing compound.....	49	brick wall.....	30	removal.....	315	Door jambs exterior.....	194
Curved glass wall lantern.....	443	building components.....	30	Dispenser hot water.....	336	garage.....	224
Custom Building Products.....	305-307	carpet.....	35	soap.....	335	interior.....	209
CustomBlend Thin-Set Mortar.....	306	ceiling.....	34, 242	Disposal, garbage.....	339-340	patio door.....	216
CustomFloat bedding mortar.....	306	checklist.....	27	basket strainer.....	335	pocket.....	222
Cutter glass.....	171	concrete block.....	31	batch feed.....	339	remove & replace... 191, 206	
vinyl tile.....	291	concrete sidewalk.....	31	cartridge.....	340	Door kit.....	222
Cutting slabs.....	50	concrete slab.....	32	cord accessory kit.....	340	Door lever, privacy.....	213
		concrete wall.....	32	food waste.....	339-340	Door locks.....	217
		decks, wood.....	32, 452	mounting assembly.....	340	patio.....	216
		doors.....	35	septic system.....	339	Door locksets... 183, 201-202	
		drywall.....	242	sink flange.....	340	Door push bar.....	226
		drywall ceiling.....	315	waste.....	29	Door roller.....	216
		equipment rental.....	28	Distribution box, electric... 540		Door stop.....	213
		estimating.....	27	Distribution panel disconnect & remove....	437	Door threshold.....	216
		fence.....	29	Ditching.....	41	Door track hardware.....	222
		floor cover.....	315	Ditra.....	308	Door trim.....	194
		flooring.....	278	Dock & fence post preservative.....	490	painting labor.....	471
		framing.....	33	Dome light ceiling fixture... 442		Doors 4-panel.....	193
		garage.....	30	Door cabinet.....	316	6-panel.....	192
		guardrail.....	29	demolition, wet.....	534	adding or removing.....	182
		joists.....	33	framing.....	69	bar.....	209
		kitchen cabinets.....	315	hinges, brass.....	196	basement.....	226
		kitchen fixtures.....	315	kick plates.....	213	bathtub.....	356
		masonry.....	30	knockers.....	213	bi-fold.....	219-221
		molding.....	34	openers.....	225	bi-fold, louvered.....	220-221
		paneling.....	252	painting labor.....	471-473	birch.....	192, 210
		plaster.....	242	peep sights.....	214	birch, prehung.....	197
		plaster ceiling.....	315	pull plates.....	213	bypass, closet.....	218
		porch.....	32, 452	push plates.....	213	bypass, mirrored.....	218-219
		shower stall.....	357			cafe.....	209
		sidewalks.....	31			camber top.....	199
		skylight, poly dome.....	172			casing.....	195
		slab.....	30			cellar.....	194
		stairs.....	35			closers.....	217
		suspended ceiling... 254, 315				closet.....	186, 210, 218-219
		wall.....	270			closet, bypass.....	218
		wall cover.....	316			demolition.....	35
		walls.....	30-31			Douglas fir.....	193

D

Dado partition demolition.....	316
Dal-Tile.....	297, 303-304
Danco.....	336
Danish Oil.....	488
DAP.....	170
Data communication cable category 5E.....	433
Deadbolts.....	202
Debris.....	
Removal.....	529
Debris removal.....	29
Deck.....	
demolition.....	452
lumber.....	452-454
lumber, Fiberon.....	454
lumber, Thompsonized... 454	
misting system.....	458

- entrance 194
 entry..... 193, 198-200
 entry, decorative fan..... 200
 entry, decorative
 half lite..... 200
 exterior..... 192-193, 197-198
 exterior fan lite..... 197
 exterior flush..... 197
 exterior prehung 197-199
 exterior prehung,
 with mini-blind..... 198
 exterior, installation 191
 fiberglass 200-201
 fir..... 193
 fire..... 192
 fire-rated 197
 flush..... 219
 flush closet 219
 flush closet, lauan 219
 folding, accordion 217
 foundation access 88
 French 193
 French, interior 208
 garage 223-224
 garage, extension
 spring..... 225
 garage, jamb hinge 224
 handle sets 202
 hanging slab doors..... 184
 hardboard 192, 209
 hardware 221
 hardware, exit..... 226
 hemlock 197
 installation 191, 197
 206, 209
 interior..... 207-208, 211-212
 interior cafe 209
 interior slab 206
 interior, birch..... 206
 interior, colonial 211
 interior, colonist 211
 interior, fir 208
 interior, French 212-213
 interior, full louver,
 pine 212
 interior, hardboard..... 207
 interior, hardboard,
 colonist 207
 interior, lauan..... 206-207
 interior, oak..... 206, 208, 212
 interior, pine 208
 interior, pine louver..... 212
 interior, prehung 209-210
 interior, prehung,
 knotty alder..... 212
 interior, solid core 207
 lauan 210
 lever latchset 213
 lockset repair 201
 metal, reversible 194
 mirrored 221
 mirrored, frameless 221
 mobile home 222
 molded face..... 207-208
 oak..... 210
 pantry 212
 patio 214
 patio grille 216
 patio handle 216
 patio lock 216
 patio roller..... 216
 patio threshold..... 216
 patio, aluminum 215
 patio, double 215
 patio, fiberglass 215
 patio, gliding 214
 patio, hinged 214
 patio, sliding 214
 patio, sliding,
 aluminum..... 215
 patio, steel..... 215
 patio, swinging..... 214-215
 patio, vinyl 215
 pet 216
 pet, cat..... 216
 pocket..... 222
 prehung 186, 197
 red oak..... 192
 removal..... 35, 197
 repair 175, 191
 replacement..... 175
 replacement
 procedure 185
 screen..... 203
 screen, installation..... 202
 screen, metal..... 203
 screen, pine 203
 screen, replace..... 203, 216
 screen, steel 203
 screen, vinyl 203
 screen, wood 203
 security 205
 security, Paradise-
 style 205
 security, with screen,
 heavy-duty..... 205
 setting trim..... 184
 shower..... 356, 359-360
 sidelites 198
 slab 192-193
 solid core..... 192, 197
 steel 198
 steel exterior..... 199
 steel, 6-panel..... 198
 steel, entry..... 198
 steel, exterior..... 199
 steel, prehung..... 198
 steel, prehung, with
 mini-blind..... 198
 stile & rail..... 208
 storm..... 204-205
 storm, all-season 204
 storm, aluminum..... 204
 storm, aluminum
 and wood..... 204
 storm, removal..... 204
 storm, self-storing..... 204
 storm, triple-track..... 204
 storm, woodcore..... 205
 terms..... 188
 weatherstripping 196
 Doors, entry..... 175
 antiquing..... 176
 reassembling 179
 rebuilding 178
 refinishing 176
 repairing holes..... 177
 Doors, exterior
 framing and replacing..... 179
 Doors, interior..... 181
 Dormer
 studs 75-76
 vents..... 90, 144
 Double bowl kitchen
 sink 329
 cast iron..... 329
 stainless steel..... 328
 Double cylinder door
 handle..... 202
 Double doors 211-212
 Double oven, wall..... 342
 Double-hung windows
 insulated 159
 replacement..... 157
 screens..... 160
 vinyl-clad..... 159
 wood 163
 Double-track storm
 windows 165
 Downlight ceiling fixture..... 440
 Downspouts
 acid wash 466
 galvanized steel..... 146
 painting labor..... 476
 remove and replace..... 106
 residential 146
 Drain connector
 garbage disposal to
 dishwasher 341
 Drain stopper..... 336
 flat sink 336
 Drain, waste and vent
 lines, plumbing for..... 393
 Drainboards, countertops..... 295
 Drawer front
 cabinet..... 316
 Drawn box
 2-device switch..... 425
 handy..... 424
 octagon..... 425
 Drip cap 141
 door bottom seal 196
 molding, wood 114
 Drip edge..... 142
 aluminum 141
 Driveway forms..... 43, 49
 Driveways, concrete 49
 Drop ceiling
 panel..... 255-257
 soffit..... 316
 Drop-in lavatory sink..... 367
 Drum mushroom
 ceiling fixture 441
 Dry ice blasting..... 537
 Dry rot remediation..... 92
 Dry tile grout
 non-sanded 307
 Dryback vinyl wall base..... 292
 Dryer, wall cavity 539
 Dry-out..... 529
 Drywall
 arch, bullnose..... 247
 ceiling, demolition..... 315
 ceilings 232
 corner bead 247
 corner tape 249
 demolition 34, 242, 316
 demolition, wet 532
 dustless sanding
 system..... 251
 finish 244
 fire code type X 243
 fire-resistant..... 243
 flexible 244
 greenboard 244
 hand sander 250
 hanging..... 228
 installation 242, 244
 J-bead 248
 joint compound..... 245-246
 joint tape..... 246
 J-trim..... 248
 L-trim 248
 mildew resistant..... 243
 moisture resistant..... 243
 moisture-resistant..... 243
 mold resistant..... 243
 nails 249
 outside corner trowel..... 250
 painting..... 483-484
 panel lift 250
 patch..... 242
 primer..... 246
 repair 242
 repair clips..... 249
 repair kit..... 248
 repair patch 248
 repair sheet 244
 repairing 234
 sander kit..... 250
 sanding respirator..... 250
 sanding sponge 250
 screws 249
 sound deadening..... 243
 spray texture..... 244
 tape 246
 tape, white, fiberglass 246
 taping and finishing 230
 texture 244
 texture spray..... 244
 textured finishes 232
 topping compound..... 246
 vinyl outside corner
 bead 248
 Drywall tools
 electronic stud sensor 249
 hammer 250
 sander 251
 screw gun, battery-
 powered 249
 screwdriver 249
 screwdriver bit 250
 screws, collated..... 249
 stilts 250
 texture brush 250
 trowel..... 250
 trowel, corner..... 250
 T-square 250
 Dual sensing smoke
 alarm..... 436
 Dual weatherproof
 lampholder & cover 428
 Dual-ionization
 smoke detector..... 436
 Duct
 heating, removal..... 396
 runs, installation 397
 Duct tape 538
 Dumont kitchen sink 329
 Dump fees 29
 Dump trucks
 rental 28
 Dumpster 538
 rental 29
 trash..... 29

Duplex receptacle		mechanical systems	511	Electrical management		Entertainment sink	338
CO/ALR	435	plaster	509	system, Smart home	444	Entrance cap, PVC	422
commercial grade	435	plumbing systems	511	Electrical non-metallic		Entry doors	193, 198-200
handy box cover	424	stucco	509	tubing conduit	427	deco fan lite	193
straight blade	434	Earthquake damage,		Electrical systems		fiberglass	200-201
waterproof cover	428	checking for		licensing and code		oak	194
Durabase	358	before making repairs	506	compliance	410	Epoxy crack repair	513
Durastall	358	jobsite walk	506	National Electrical		Epoxy floor coating	495
Duratemp panel siding	111	structural engineer	506	Code (NEC)	410	Epoxy gloss coating	496
Durock backerboard	295	Earthquake damage,		power shortfall	409	Epoxy mortar	306
Durock cement board	245	cosmetic	497	repairing earthquake		Epoxy primer	496
Dust control	536	Earthquake damage,		damage	511	Equipment costs	13
Dustless drywall		increased risk		service upgrade	410	Equipment rental	
sanding system	251	when adding a room	504	Eliane ceramic tile	297	demolition	28
DWV pipe remove &		when making		Eljer	329	foundations and slabs	39
replace	408	alterations	504	Eljer Plumbingware	367	Escape window	172
		when removing wall		Elkay Mfg.	328, 338	Estimating home	
		bracing	505	Embossed basswood		improvement costs	
E		Earthquake damage,		molding	259	hanging doors	5
E.L. Mustee	336, 358	structural	497	Embossed concrete	50	price book	6
Earthquake anchor	512	Easysills	165	Embossed decorative		problems	5
Earthquake damage		Eave closure	140	molding	259	Estwing	250
(IBC) seismic safety		Eave vents	90	Embossed polystyrene		Eternit	139
standards	497	Decomesh	89	casing	265	Excavation	41
(IPMC) seismic safety		Eaves painting	480	Embossed polystyrene		backfilling	40
standards	497	Edeck	452	molding		fine grading	40
(IRC) seismic safety		Edge		base	263	footings	40
standards	497	counter	268	chair rail	266	rock	40
structural		drip	141-142	crown	268	spreading	41
improvements	498	flashing, roof	143	Embossed prefinished		tamping	41
structural		Edge forms, concrete	40, 43	molding		topsoil	41
improvements, (IRC)	498	Edge protection tile	303	chair rail	266	Excelon vinyl	
structural		Edge pulls	222	Embossed tileboard	251	composition tile	289-290
improvements,		Edge V-plank	252	Embossing leveler	285	Exhaust fan	380
permits for	498	Efficiency cast iron		Emergency dry-out		bath	378-381
Earthquake damage		kitchen sink	329	service	529	bath, vertical discharge	379
prevention		Egg & dart cast molding	262	Emser International	298	ceiling	379
anchors, hold-down	500	Egg knob locksets	202	EMT conduit	422, 426	QuietTest	380
bracing hillside homes	502	Eggshell wall paint, latex	492	45-degree elbow	423	timer switch	382
bracing, cripple walls	500	Elastocaulk	136	90-degree elbow	423	utility, vertical discharge	379
bracing, open front	501	Elastomastic	136	combination coupling	424	ValueTest with light	380
foundation bolting	499	Elastomeric roof coat	137	compression connector	423	vertical discharge	379
masonry chimneys,		Elastomeric water-		coupling	424	wall	379
anchoring	503	proofing paint	494	offset compression		with heater	381
tension ties on		Elastotape	136	connector	424	with infrared heater	381
split-level homes	503	Elbow		offset screw connector	423	Exhauster, roof	145
Earthquake damage		45-degree plain end	421	set screw connector	423	Exit bar	226
prevention, FEMA		90-degree	423	strap	424	Expansion bolt	512
recommendations	499	90-degree standard		EMT conduit, removal	422	Expansion joints	
bracing hillside homes	502	radius	421	EMT strap	424	concrete	46
cripple wall bracing	500	EMT 45-degree	423	Emulsion, asphalt	133	Exposed aggregate finish	49
foundation bolting	499	EMT 90-degree	423	Enamel		Exposed aggregate	
hold-down anchors	500	pulling	423	floor & porch	495	sealer	495
masonry chimneys,		rigid or IMC steel		interior & exterior	493	Exposed round conduit	
anchoring	503	conduit	429	latex	492	box, non-metallic	428
open front bracing	501	rigid steel conduit	429	oil-based	496	Extendable roller	291
tension ties on split-level		rigid steel conduit	429	painting	483-484	Extension kit, jamb	216
homes	503	service entrance	432	wall & trim	492	Exterior & interior stain,	
Earthquake damage repair		Electric baseboard		Enamel undercoater		acrylic	487
chimneys	510	heaters	404	interior	491	Exterior clear finish	489
concrete cracks	507	Electric cooktop	342	Encapsulate mold	537	Exterior door jambs	194
cracks in plaster		Electric metallic tube		Encapsulated fiberglass		Exterior doors	193
and stucco	509	conduit	422, 426	roll insulation	85	fir	192
drywall	510	Electric metallic tube		Enclosure, shower	356	flush	192
electrical systems	511	conduit removal	422	pivot door	359	prehung	197
epoxy injection	507	Electric service panel	439	End panel		Exterior jambs, kerfed	194
fireplaces	510	Electric space heaters	392	base cabinets	317	Exterior pain, satin flat	494
floors out of level	508	Electric wall oven	342	cabinets	316, 318	Exterior painting	466
foundations and slabs	507	Electric water		wall cabinets	319	Exterior sanding,	
framing	508	heater	406-407	Energy-efficient		manhours	467
gypsum drywall	510	PowerStar™	407	electrical upgrades	444	Exterior stain	487
		tankless	407	ENT conduit	427	Plus 10	487

- Exterior trim, painting 463
 Exterior wall assemblies 71
 Exterior window shutters 167
 Extraction, water 529
 Extruded polymer
 molding 263
 Eyeball trim light kit 440
- F**
- F channel 459
 F connector for
 RG6 coaxial cable 433
 Fabbback acrylic
 mirrored sheet 171
 Fabric
 asphalt roofing 131
 polyester stress-block 136
 Factors
 high time painting 466
 painting difficulty 480
 Fairfax faucet,
 two-handle 374
 Fairfax kitchen faucet 333
 Fan lite doors 197, 201
 Fans 444
 attic exhaust 91
 bath 378-381
 bath exhaust 378-381
 bath exhaust & heater 381
 bath exhaust,
 QuietTest 380
 bath exhaust, vertical
 discharge 379
 bath, premium 379
 SensAire control
 switch 382
 utility exhaust, vertical
 discharge 379
 utility, thru-the-wall 380
 wall exhaust,
 chain-operated 380
 Fascia
 aluminum 114
 board 76
 staining 473
 vinyl 108
 Fashion Series 252
 Fasteners 458-459
 deck screws 459
 Fast-setting patch 285
 Faucet hole cover 335
 Faucets
 bar 338
 bar, single handle 338
 bar, two-handle 338-339
 bidet 362
 compression, repair 352
 kitchen 331-333
 kitchen, two-handle 333-334
 kitchen, two-handle,
 with spray 334
 laundry, two-handle 337
 lavatory 370-372
 lavatory, adjustable
 center 374
 lavatory, center set 371-374
 lavatory, infrared 371
 lavatory, two-handle 372
 pressure balanced 361
 Roman tub 354
 shower and tub 360
 supply 374
 tub & shower 360-362
 tub and shower 360
 Feather edge additive 286
 Federal Emergency
 Management Agency
 (FEMA)
 recommendations 499
 structural improvements 498
 Fees, recycling 29
 Felt
 roofing 133
 roofing, glass fiber 134
 scribing 291
 Fence
 demolition 29
 staining labor 474
 Fence & barn paint 496
 Fence post preservative 490
 Fernco 341
 Fiber cement
 lap siding 112
 siding 113
 siding panel 112
 soffit 112
 trim for siding 112
 Fiber-cement
 roofing 139
 Fibered aluminum
 roof coating 137
 Fibered roof coating 137
 Fiberglass
 base sheet 133
 bathtubs 357
 panels 140
 reinforcing membrane 136
 screen rolls 168
 shower stall 358
 window trim, bath 355
 Fiberglass asphalt
 shingles 131
 Fiberglass ceiling
 panel 256-257
 Fiberglass entry
 doors 200-201
 Fiberglass insulation
 batt 84
 Kraft-faced 84
 roll 84-85
 unfaced 84
 Fiberglass mat roof patch 135
 Fiberglass reinforced
 plastic panels 253
 Fiberon 452, 454
 Field adhesive, SBS 134
 Field tile
 setting with adhesive 294
 setting with mortar 294
 Fill, excavation 40
 Filler, crack 136
 Filler strip 317-319
 oak 321
 wood 138
 Film, polyethylene 87
 Finish carpentry
 countertops 322
 siding 107
 Finish sealer, high-gloss 307
 Finished box cover 425
 Finishes
 exterior clear 489
 flat latex 492
 floor, oil-based 489
 interior classic clear 489
 log home gloss 489
 rust-resistant 496
 stain gel, non-wood 488
 wood 487
 Finishing, concrete 49-50
 Finishing compound
 wallboard 246
 Finishing putty, Pergo 283
 Fink truss 76
 Fir doors 192-193
 Fire doors 192
 Fireblocks 68
 Firebrick 115
 Fireplaces
 demolition 115
 masonry, repair 104
 prefabricated 116
 repair 115
 repairing earthquake
 damage 510
 Fire-rated door frames 194
 Fire-rated doors 197
 Fire-resistant drywall 243
 Fish tape 413
 cable snake 417
 Fissured ceiling
 panel 256-257
 Fixed skylights 172-173
 Fixture removal 530
 Fixture gasket removal 352
 Fixture supply lines 374
 Fixture valve lines 374
 Fixture, light
 ceiling 442
 chandelier 442
 chrome bath bar 441
 fluorescent ceiling 441
 flush mount ceiling 441
 jelly jar 443
 motion sensing 443
 mushroom flush mount 442
 outdoor bulkhead 443
 outdoor wall lantern 443
 remove & replace 441
 wave bath 441
 Fixtures
 troffer fluorescent 258
 U-lamp troffer
 fluorescent 258
 Flange kit, load center 437
 Flashing
 aluminum roll 141
 aluminum siding 113
 angle 142
 copper formed 141
 counterflash 144
 galvanized 141
 gravel stop 142
 lead 143, 145
 patch 135
 pipe 143, 145
 removal 129
 repair 129
 roll valley 141, 143
 roof 134
 roof edge 143-144
 roof, removal 134
 roof-to-wall 144
 service entrance roof 432
 shingle 144
 step 144
 w-valley 144
 Flashing cement
 pro-grade 135
 Flashing leaks 118
 Flashing paper, roof 88
 Flashing, pipe, tile roof 145
 Flat masonry & stucco
 paint 494
 Flat paint 492
 exterior, satin 494
 interior 492
 latex 494
 Flat sink drain stopper 336
 Flex conduit appliance
 connection 417
 Flex screw-in connector 426
 FlexBond bonding
 mortar 306
 Flexible aluminum
 conduit 426
 Flexible armored BX
 cable 419
 Flexible bonding mortar 306
 Flexible connector
 90-degree 426
 90-degree insulated 426
 Flexible metal corner
 tape 249
 Flexible steel conduit 426
 Flip locks, window 171
 Float, carpet 531
 Float finish, concrete 49
 Floating floor
 installation kit 280
 Flood abatement 531
 Flood Company, The 490
 Flooding, effects of 515
 Floor
 beam 62
 beam, shimming 62
 clamp 281
 decking, subflooring 66
 demolition 35
 furring 72
 joists 64-65
 repairs, framing 62
 slab, concrete 49
 staining 475
 Floor & porch enamel 495
 Floor & porch oil gloss 495
 Floor & wall tile, ceramic 297
 Floor beams
 decay 53
 reinforcement with
 jack posts 55
 repair 53
 Floor coating, epoxy 495
 Floor covering
 tile, resilient 271
 wood 271
 Floor drying system 539
 Floor enamel 495
 Floor finish, oil-based 489
 Floor furnace, gas 404
 Floor insulation 80
 Floor jacks 54
 Floor joist
 demolition 33
 repair 54-55
 Floor molding, hardwood 278

Floor plank choices	white oak strip	281	Foil	Framing lumber	452
for porches and decks	wood	281	aluminum	Framing straps	512
Floor primer	wood laminate	283	barrier	Franklin Brass	386-387
Floor tile	wood plank	280	Folding doors	French doors	193, 208
ceramic	wood, installation tools	281	locks	interior, double	212-213
granite	Flooring installation system	217	accordion	painting labor	471-472
marble	laminate floor	284	Footings	Frenchwood	214, 216
natural stone	Flooring over concrete	276	concrete	Frieze cast molding	262
parquet	Flooring trim	284	continuous	FRP panel molding	253
Place n Press	bamboo	280	demolition	FRP wall and ceiling	
Saltillo ceramic	heart pine	281	excavation	panel	253
slate	Flooring, resilient		keyway	Full-view storm doors	205
travertine	sheet vinyl	274	Forced air furnace	Fungicide	92
vinyl	Flooring, tile		Forced-air heating	Furnace	
vinyl, slip-retardant	ceramic	276	Formica countertops	coal	404
wood	ceramic, tips on	277	Forms	counterflow, gas	397
Floor trim, wood	cork	275	board	flue	399-403
Floor warming system	granite	275	concrete	gas	398
thermostat	marble	275	curb	gas, duct	396
Flooring	Flooring, wood		footings	gas, floor	404
adhesive for rubber tile	hardwood	272	foundation	gas, thru-wall	404
adhesive for vinyl	laminate	274	keyway	gas, wall	404
sheet	softwood	272	plywood	horizontal flow, gas	397
adhesive for vinyl tile	strip	272	stripping	low boy, gas	396
adhesive for wood	Floors, sagging	54	wall	oil fired	397
adhesive remover	Floors, wood fixing		Formwork, stripping	remove & replace	398
bamboo plank	squeaks	56	Forsyth composite sink	wood burning	404
carpet	Flue		Foundation	Furniture	
ceramic tile	chimney	399	access doors	blocking	529
demolition	chimney, aluminum	399	anchor	moving	529
demolition, wet	furnace	399-403	bracket	Furniture pad	538
hardwood plank	Fluidmaster	364	crack repair	Furring	
hardwood, sanding	Fluorescent ceiling		demolition	floor	72
heart pine plank	fixture	441	vent	wood	72
Hevea parquet	Fluorescent diffuser		vents		
installation spacer	fixture, low profile	441	Foundation and roof		
laminate floor	Fluorescent fixtures		coating, non-fibered		
underlayment	parabolic troffer	258	Foundation and slab		
laminate strip	troffer	258	pre-construction		
maple hardwood	U-lamp troffer	258	checklist		
maple strip, unfinished	Flush doors	219	Foundation bolt		
molding, laminate	bi-fold closet	219	Foundation insulation		
molding, wood laminate	birch exterior	192, 197	Foundations		
Northwoods hardwood	birch interior	206-207, 210	concrete		
oak	fire-rated	192	cracks (active or		
oak parquet	hardboard	192	dormant)		
oak self-stick parquet	hardboard exterior	197	equipment rental		
oak, solid hardwood	hardboard interior	206-209	footings		
Pergo	hardwood exterior	192, 197	forms		
Pergo underlayment	lauan exterior	192	leaky basement walls		
red oak, strip	lauan interior	206-207, 210	repair		
removal	oak entry	194	Frame		
repairs	oak interior	206, 210	painting labor		
rustic oak plank	painting labor	471-472	sink		
sealant, laminate	red oak interior	210	Frame wall, aligning		
setting with adhesive	steel exterior	198-199	Framed bypass door,		
setting with mortar	steel utility	198	bathtub		
sheet vinyl	Flush mount ceiling		Frameless corner		
strips, natural wood	fixture	441-442	cabinet		
surface preparation	Flush mount light fixture	442	Frames, door		
teak	Flush valve		Framing		
TrafficMaster laminate	urinal, Sloan Royal	363	cut window opening		
transition reducer strip	Flute & reed molding	261	damage		
transition strip	Fluted casing embossed		demolition		
trim, hardwood	polystyrene molding	265	estimating, problems		
underlayment	Fluted casing		with		
underlayment & patch	prefinished molding	265	interior doors		
underlayment skimcoat	Foam insulation	85	partitions, wood		
vinyl roll	Foam underlayment	283-284	repairs		
vinyl sheet	Foam weatherstripping	196	room additions		
vinyl wall base	Foamular XAE	85	straightening		
water extraction			wall studs		

G

Gable, truss	76
Gable louver, metal	90
Gable vents	89
metal	90
power attic	92
redwood	90
Gabrielle Comfort	
Height toilet	363
GAF	130-131, 134, 145
GAFLAS	
ply 4 glass felt	134
Torch and Mop System	134
Galvanized bullnose	
corner bead	247
Galvanized flashing	141
Galvanized rigid steel	
conduit	429
Galvanized roofing	138
louver	145
Galvanized steel rain	
gutters	146
Garage demolition	30
Garage doors	223
bonded steel	224
bottom seal	223
extension springs	225
hardware	224-225
installation	223
insulated	224
jamb hinge	224
locks	224
low headroom kit	224
operators	225
raised panel	223

replacement.....	223	Glazing compound	170	Gypsum base, Imperial ...	245	strip.....	278
steel.....	223	Glazing points.....	170	Gypsum board		TapTight	280
steel, non-insulated	224	Glazing putty, remove		DensArmor	243	trim.....	281
torsion spring.....	223	and replace.....	170	Gypsum lay-in ceiling		Hardwood molding	259,
trolleys, installation.....	223	Glazing tool	171	panel.....	257		278, 280
weather seal	224	Glidden.....	492-495	Gypsum panel lift.....	250	Bruce parquet.....	282
Garage slabs.....	42	Gloss, polyurethane oil....	495	Gypsum wallboard		Harris-Tarkett....	278, 280-281
Garbage disposal	339-340	Gloss & seal, tile	308	demolition	242	Hartland cast iron	
basket strainer.....	335	Gloss enamel, alkyd	493	fire code.....	243	kitchen sink.....	330
connector, dishwasher		Gloss finish, log home....	489	flexible	244	HazMat protection	538
drain	341	Glue, Pergo laminate		installation	242, 244	Headers, carpentry.....	68
cord kit.....	340	floor.....	283	joint cement.....	246	Headroom kit	224
disposer.....	339-340	Grade beams		joint tape.....	246	Heart pine	
mounting assembly	340	concrete.....	48	mold resistant.....	243	flooring trim.....	281
mounting gasket.....	340	formwork.....	44	primer	246	plank flooring	280
removal.....	315	Granite		repair	242	Heat recovery ventilator	
sink flange	340	aggregate concrete	46	spray texture.....	244	retrofit.....	406
sink stopper.....	340	countertop	323	water resistant.....	243	Heat-A-Lamp bulb	
switch, sink top.....	340	floor tile	299			heater & fan.....	381
Garden windows.....	158	mortar mix	306			Heat-A-Ventlite heater.....	382
Gardner	135-136	setting adhesive	306			Heaters	
Gas breaker, rental.....	28	tile, natural.....	299			baseboard, electric.....	404
Gas cooktop	342	tile flooring.....	275			water, gas.....	405
Gas furnace		vanity top.....	377			whirlpool bath	
counterflow	397	Granules, roofing.....	136			EZ-Install	354
exterior wall duct	396	Gravel stop	142			Heating duct, removal	396
horizontal flow	397	Gravity heating	391			Heating system	
interior wall duct	396	Gray Board insulation.....	85			component removal.....	396
low boy	396	Grecian cast molding.....	262			Heating systems,	
Gas water heater.....	405	Greek key chair rail	262			electric space heaters ...	392
power vent.....	407	Greenboard	71			hot water, radiant	
tankless	407	Greenhouse panels.....	140			heating	392
Gasket		Greenwaste, recycling.....	29			Heating systems, warm air	
fixture, remove &		Greenwich kitchen sink ...	330			forced-air	391
replace	352	Grilles, door, patio.....	216			gravity.....	391
mounting.....	340	Ground bar kit				Heating, hydronic	398
wax, toilet bowl.....	364	breaker box	440			Helmsman spar	
Gates, security	205	QO load center.....	440			urethane	488
Gazebo ceiling fan.....	444	Ground fault interrupter				Hemlock doors	212
GE Appliances.....	341-342	plug-on circuit breaker... 440				Henry	133, 135-137,
Gel stain	488	Ground rod clamp.....	432				254, 285-286, 290
General requirements.....	29	Grounding bushing				HEPA central air	
Generator	540	insulated metallic.....	430			filtration retrofit.....	398
Genesis kitchen faucet....	332	Grout				HEPA vacuum	540
Georgetown lavatory		colorant.....	307			Hevea parquet flooring....	282
faucet.....	373	Saltillo.....	307			High boy threshold, oak ...	195
Georgia-Pacific.....	245, 251, 253	sanded.....	307			High early strength	
GFCI circuit breaker	437	sealer.....	308			concrete.....	47
plug-on	440	tile.....	294			High time factors	466
GFCI receptacle.....	425, 435	tile, non-sanded dry.....	307			High-gloss enamel.....	493
duplex waterproof.....	428	Grout mix concrete	46			High-gloss finish sealer ...	307
hospital grade.....	435	Grouting, concrete.....	50			Hinges	
vertical	428	GRS conduit	429			cabinet.....	328
wet location cover	428	removal.....	429			cabinet, Euro	327
GFI plug-on circuit		Guard, window	167			door	196
breaker	440	Guardrail, demolition	29			garage door.....	224
Girders, carpentry.....	62	Gutters				solid brass	196
Glacier Bay.....	331, 333,	acid wash	466			Hip and ridge shingles....	130
.....	337, 360, 370-372	aluminum	146			Hip shingles.....	131
Glacier Extensa		flashing cement	135			Hold-down anchor	512
kitchen faucet	332	galvanized steel.....	146			Hole cover, faucet	335
Glaslock interlocking		painting labor.....	476			Hollow core doors.....	207
shingles	130	patching material	135			Hollow metal doors.....	194
Glass		remove and replace	106			Homax	493
jalousie	169	roof caulk.....	136			HomeLine	
measure & cut	170	vinyl	146			circuit breaker.....	437
Glass block, mortar mix... 306		Gutting, demolition	30			indoor main lug load	
Glass cutters	171	Gypboard, painting.... 483, 484				center	437
Glass felt, ply 4.....	134	Gypsum				HomeStyle	
Glass globe ceiling		demolition	34			suspended ceiling.....	256
fixture.....	442	greenboard	71				
Glazing bead	170	Type X.....	71				

H

Hammer, drywall	250	Hampton Bay™.....	441, 443	Hand sander	251	drywall	250	Handle sets	216	double cylinder	202	entry door	202	Handrail	481	painting.....	481	patio deck	455	Handy box		cover, blank	424	drawn.....	424	welded	424	Hanger bracket, lavatory... 369	Hangers, pocket door..... 222	Harbour Collection..... 289	Hardboard		lap siding	112	panel siding	111	Hardboard doors	192,		207, 209	fire-rated	197	Hardboard siding	100	Hardibacker	295	Hardie	112	Hardipanel	112	Hardiplank	112	Hardisoffit	112	Hardware		bi-fold door	221	door, patio	216	garage door	224-225	pocket door.....	222	screen door	203	Hardwood		flooring demolition	315	molding, embossed	259	molding, Victorian base... 259	paneling	251	Hardwood doors	192	fire-rated	192	prehung	197	Hardwood flooring		demolition	35	maple.....	279	molding.....	278, 280	oak.....	278-279	removal.....	278	rosewood.....	279	sanding.....	281	strip.....	278	TapTight	280	trim.....	281	Hardwood molding	259,		278, 280	Bruce parquet.....	282	Harris-Tarkett....	278, 280-281	Hartland cast iron		kitchen sink.....	330	HazMat protection	538	Headers, carpentry.....	68	Headroom kit	224	Heart pine		flooring trim.....	281	plank flooring	280	Heat recovery ventilator		retrofit.....	406	Heat-A-Lamp bulb		heater & fan.....	381	Heat-A-Ventlite heater..... 382	Heaters		baseboard, electric.....	404	water, gas.....	405	whirlpool bath		EZ-Install	354	Heating duct, removal	396	Heating system		component removal.....	396	Heating systems,		electric space heaters ...	392	hot water, radiant		heating	392	Heating systems, warm air		forced-air	391	gravity.....	391	Heating, hydronic	398	Helmsman spar		urethane	488	Hemlock doors	212	Henry	133, 135-137,		254, 285-286, 290	HEPA central air		filtration retrofit.....	398	HEPA vacuum	540	Hevea parquet flooring....	282	High boy threshold, oak ...	195	High early strength		concrete.....	47	High time factors	466	High-gloss enamel.....	493	High-gloss finish sealer ...	307	Hinges		cabinet.....	328	cabinet, Euro	327	door	196	garage door.....	224	solid brass	196	Hip and ridge shingles....	130	Hip shingles.....	131	Hold-down anchor	512	Hole cover, faucet	335	Hollow core doors.....	207	Hollow metal doors.....	194	Homax	493	HomeLine		circuit breaker.....	437	indoor main lug load		center	437	HomeStyle		suspended ceiling.....	256
-----------------------	-----	-------------------	----------	-------------------	-----	---------------	-----	-------------------	-----	-----------------------	-----	------------------	-----	----------------	-----	---------------	-----	------------------	-----	-----------	--	--------------------	-----	------------	-----	--------------	-----	---------------------------------	-------------------------------	-----------------------------	-----------	--	------------------	-----	--------------------	-----	-----------------------	------	-------	----------	------------------	-----	------------------------	-----	-------------------	-----	--------------	-----	------------------	-----	------------------	-----	-------------------	-----	----------	--	--------------------	-----	-------------------	-----	-------------------	---------	------------------	-----	-------------------	-----	----------	--	---------------------------	-----	-------------------------	-----	--------------------------------	----------------	-----	----------------------	-----	------------------	-----	---------------	-----	-------------------	--	------------------	----	------------	-----	--------------	----------	----------	---------	--------------	-----	---------------	-----	--------------	-----	------------	-----	----------------	-----	-----------	-----	------------------------	------	-------	----------	--------------------	-----	--------------------	--------------	--------------------	--	-------------------	-----	-------------------------	-----	-------------------------	----	--------------------	-----	------------	--	--------------------	-----	----------------------	-----	--------------------------	--	---------------	-----	------------------	--	-------------------	-----	---------------------------------	---------	--	--------------------------	-----	-----------------	-----	----------------	--	------------------	-----	-----------------------------	-----	----------------	--	------------------------	-----	------------------	--	----------------------------	-----	--------------------	--	---------------	-----	---------------------------	--	------------------	-----	--------------	-----	-------------------------	-----	---------------	--	----------------	-----	---------------------	-----	-------------	---------------	-------	-------------------	------------------	--	--------------------------	-----	-------------------	-----	----------------------------	-----	-----------------------------	-----	---------------------	--	---------------	----	-------------------------	-----	------------------------	-----	------------------------------	-----	--------	--	--------------	-----	---------------------	-----	------------	-----	------------------	-----	-------------------	-----	----------------------------	-----	-------------------	-----	------------------------	-----	--------------------------	-----	------------------------	-----	-------------------------	-----	-------------	-----	----------	--	----------------------	-----	----------------------	--	--------------	-----	-----------	--	------------------------	-----

Hood	Ingenium Flushing	oak, flush	Joint repair, concrete
range	System	pine	Joint tape
range, quiet	Innovations lavatory	pine louver	drywall
range, vented	faucet	prehung	Joints, expansion
Hooks	Inside corner & cove	prehung	Joists
robe	molding	Interior flat paint	bridging
Hopper gun, ceiling	Inside corner bead	Interior latex	ceiling
finish	metal	eggshell	demolition
Hopper vinyl window	Inside corner molding	flat finish	floor
Hospital grade	polystyrene	paint, semi-gloss	TJI
receptacle GFCI	prefinished	Interior paint	J-trim, metal
Hot mix, spreading	In-Sink-Erator	Interior painting	Jubilee White Ice
Hot water dispenser	Instl-X	Interior sanding, labor	beaded paneling
Hot water heating	Installation kit	Interior trim	Junction box
systems	floating floor	baseboard	Junior basket strainer
Hotmopping, roofing	Pergo	casing	
House wrap	Installation system	molding	
Hub	laminated flooring	Interior wall assemblies	K
bolt-on A type	Insulated grounding	Interlocking shingles	Karnak
universal	bushing, metallic	Intermatic	Key locks, sliding
watertight conduit	Insulating bushing	Intermediate metal	window
Humidifier, central	high-impact	conduit	Keystone
HVAC	thermoplastic	International	Keyway form
central air conditioning	Insulation	Thermocast	Kick plates, door
cleaning	blow-in cellulose	In-wall spring wound	Kicker, garage door
component removal	board	timer	Kickplate channel
hydronic heating	board, demolition	Island sink, polycast	Kickplate coil
hydronic heating	built-up roofing,		Kidde
system	patch		KILZ
radiator, cast iron	ceiling		sealer, primer
removal of	FBX	J	& stainblocker
components	fiberglass	J A Manufacturing	exterior sealer primer
restoration	fiberglass batt		stainblocker
Hydraulic door closers	fiberglass, unfaced	Jack roof	Kitchen
Hydraulic jacks	floor	Jack posts	appliance removal
Hydronic heating	foam	Jackhammer, rental	cabinets, removal
Hydro-X Vacuum	foundation	Jalousie windows	countertop
Hygienist, industrial	masonry	aluminum	Kitchen cabinet doors
	natural fiber	operators	Kitchen cabinets
	polystyrene	replacement glass	base
	pouring	vinyl	wall
	R-Gard	Jamb extension kit	Kitchen countertop
	rockwool	Jamb sets	miter bolt kit
	roof, perlite	finger joint	Kitchen faucet
	SAFB	interior	deck spray
	sill gasket	solid clear pine	pull-out spout
	sound control	with hinges	single-handle
	urethane sheathing	Jamb	two-handle
	vapor barrier	exterior	Kitchen sink
	vermiculite	exterior door	Beaumont
	wall	exterior, remove &	cast iron
	Interior pressure wash	replace	composite
	Interior & exterior stain	interior, remove &	double bowl
	acrylic	replace	Iveness
	Interior acrylic latex	pocket door	Newport
	paint	Jameco	polycast
	Interior doors	James Hardie	single bowl
	birch, flush	Jasco	stainless steel
	cafe	J-bead	Kitchen sink basket
	fire	metal	strainer
	fire-rated	plastic	Spin-N-Lock
	flush	J-channel	washer
	half louver	thermoplastic	Kitchens
	hardboard	vinyl	appliances
	hardboard, colonist	Jeffrey Court	cabinets and counters
	hardboard, flush	Jelly jar fixture	cabinets and counters,
	heater closet	Job Cost Wizard	costs
	hemlock, prehung	Job survey (scope of	cabinets and counters,
	knotty alder	work)	custom-made
	lauan	Joint cement, lightweight	cabinets and counters,
	lauan, flush	Joint compound	refinishing
	oak		

- design..... 309
 electrical service
 checklist..... 315
 remodeling checklist..... 313
 work triangle..... 310
 Klean-Strip..... 487
 Knob and tube wiring..... 411
 Knobs, cabinet..... 324-326
 Knock down door
 frames..... 194
 Knockdown ceiling..... 245
 Knockdown drywall
 texture..... 244
 Knockdown stucco..... 493
 Knockers, door..... 213
 Kohler..... 328-330,
332-333, 353-354, 363,
366-369, 371, 374
 Kool Patch acrylic roof
 patching cement..... 135
 Kool Seal..... 135
 Kraft-faced fiberglass
 roll insulation..... 84
- L**
- Labor costs..... 12
 hourly..... 16
 jobsite conditions..... 13
 Labor
 high time painting..... 466
 Labor, manhours
 apply acoustic ceiling
 texture..... 469
 apply masonry block
 filler on brick masonry..... 476
 burn off paint..... 466
 caulking..... 466
 cutting-in..... 466
 masking..... 466
 paint, stripping..... 467
 painting aluminum..... 482
 painting baseboard..... 468
 painting bookcases and
 shelves..... 468
 painting cabinets..... 469
 painting closet shelf &
 pole..... 470
 painting concrete
 floor..... 474-475
 painting (CMU)..... 477-478
 painting decorative wood
 handrail..... 481
 painting door frame &
 trim..... 471
 painting exterior
 French door..... 471
 painting exterior louver
 door..... 471
 painting exterior panel
 (entry) door..... 471
 painting exterior plaster
 for stucco..... 480-481
 painting flush exterior
 door..... 471
 painting gutters &
 downspouts..... 476
 painting gypsum
 drywall ceiling..... 484
 painting gypsum drywall
 walls..... 483
 painting interior flush
 door..... 471-472
 painting interior French
 door..... 472
 painting interior louver
 door..... 472
 painting interior panel
 door..... 472-473
 painting molding or trim..... 479
 painting roof
 overhang..... 479-480
 painting shutters or
 blinds..... 481-482
 painting smooth brick
 masonry..... 477
 painting tongue &
 groove ceiling..... 469-470
 painting windows..... 486, 487
 painting wood deck or
 floor..... 475
 painting wood paneled
 walls..... 485
 pressure washing
 (waterblasting)..... 468
 repaint home exterior..... 466
 repaint home interior..... 466
 sandblasting..... 467
 sanding, exterior..... 467
 sanding, interior..... 466
 staining fascia..... 473
 staining picket fence..... 474
 staining rough wood
 siding..... 482
 staining tongue-and-groove
 ceiling..... 470
 staining wood deck or
 floor..... 475
 staining wood paneled
 walls..... 485
 wash down..... 467
 waterblasting (pressure
 washing)..... 468
 Lag screws
 drill tip suspension..... 255
 Laminate flooring
 finishing putty..... 283
 glue..... 283
 installation spacer..... 283
 installation system..... 284
 molding..... 284
 Pergo Presto..... 283
 sealant..... 283
 strip..... 284
 TrafficMaster..... 284
 trim..... 284
 underlayment..... 283-284
 Laminate shingles
 architectural..... 130
 Laminated plastic
 countertops..... 322-323
 Laminated plastic
 countertop..... 324
 Lampholder & cover
 dual weatherproof..... 428
 Lantern
 curved glass wall..... 443
 motion sensing..... 443
 outdoor wall..... 443
 Lap
 cement..... 133
 Lap siding
 fiber cement..... 112
 hardboard..... 112
 OSB..... 111
 spruce..... 110
 textured..... 111
 Lasco Bathware..... 356-357
 Lascoat..... 356
 Latch, knob
 passage..... 213
 Latchsets
 privacy lever..... 213
 privacy, egg knob..... 213
 Latex glazing compound..... 170
 Latex paint
 eggshell..... 492
 enamel..... 492-493
 exterior..... 494
 flat finish, interior..... 492
 masonry & stucco..... 494
 semi-gloss..... 493
 waterproofing..... 494
 Latex primer
 PVA..... 491
 resilient flooring..... 285
 Lattice molding..... 269
 Lauan doors..... 206-207, 210
 flush..... 192
 Laundry faucet
 two-handle..... 337
 wall mount..... 337
 Laundry tub
 double bowl..... 337
 overflow tube..... 337
 single bowl..... 336
 Utilatub..... 336
 utility kit..... 336
 Lavatory base..... 367
 Lavatory bowl..... 366
 Lavatory faucet
 adjustable center..... 374
 decorator..... 373
 hands free..... 371
 hi-arc..... 373
 single-handle..... 370-371
 single-handle, zinc..... 370
 two-handle..... 371-374
 two-handle, acrylic..... 371
 two-lever..... 371
 Lavatory hanger bracket..... 369
 Lavatory leg set..... 367
 Lavatory sink..... 367-369
 above counter..... 369
 Cadet..... 368
 drop-in..... 367-368
 Farmington..... 367
 Laurel..... 368
 Magnolia..... 369
 Miami..... 369
 Murro..... 369
 oval..... 368
 Ovalyn..... 368
 pedestal..... 366
 Radiant..... 368
 Reminiscence..... 369
 removal..... 367
 Renaissance..... 367
 round..... 368
 Seychelle..... 367-368
 Summit..... 368
 under counter mount..... 368
 wall hung..... 369
 wall hung, corner..... 369
 Lavatory trap, remove
 & replace..... 352
 Lay-in ceiling panel
 gypsum..... 257
 LB conduit body, PVC,
 Type LB..... 421
 LDR Industries..... 335
 Lead flashing..... 143, 145
 Leak Sentry toilet fill
 valve..... 364
 Leak Stopper rubberized
 roof patch..... 135
 Leaks roof penetrations..... 120
 LED lighting system
 retrofit..... 444
 Ledgers..... 73
 Leg set, pedestal
 lavatory..... 367
 Lenape..... 304-305
 Let-in bracing..... 67
 Let-in ribbons..... 73
 Leveler, embossing..... 285
 Lever locksets..... 202
 Leviton..... 434-435
 Lexan XL-10..... 171
 L-flashing..... 143
 Lift sash..... 166
 Light bar
 beveled..... 384
 medicine cabinet..... 384-385
 Light fixture
 ceiling..... 440
 chandelier..... 442
 chrome bath bar..... 441
 drum, mushroom..... 441
 jelly jar..... 443
 mushroom flush mount..... 442
 outdoor bulkhead..... 443
 remove & replace..... 441
 wave bath..... 441
 Light kit
 mini can..... 440
 mini can recessed
 eyeball..... 440
 recessed..... 440
 recessed non-IC baffle..... 440
 slot aperture..... 440
 Light-emitting diodes..... 444
 Lighting
 motion sensor..... 443
 recessed..... 440
 Lighting fixtures, soffit,
 kitchen..... 316
 Lighting panel
 acrylic..... 258
 styrene..... 258
 Lights, suspended troffer
 fixture..... 258
 Lightweight concrete..... 46
 Linoleum, sheet
 demolition..... 35
 Liquid underlayment..... 285
 Liquid-tight flexible
 conduit, Carflex..... 427
 Listello tumbled marble
 tile..... 300
 Litex..... 493
 Lithonia Lighting..... 441
 Load center
 combination ring type..... 437
 flange kit..... 437
 ground bar kit..... 440

HomeLine indoor	Main lug load center.....	439	light bar.....	384-385	Miter bolt kit.....	324
main lug.....	HomeLine indoor.....	437	lighted.....	383	Mobile home doors.....	222
indoor main lug.....	indoor.....	438	mirrored.....	383	Modified bitumen	
outdoor.....	Mallet, rubber.....	291	octagonal.....	383	adhesive.....	133
Loading trucks.....	Man-O-War marine		oval.....	383	Moen.....	332, 360, 362,
Locknut steel sealing	spar varnish.....	488	single door.....	383		370, 373-374
conduit.....	Maple plank flooring.....	280	sliding door.....	383	Moisturbloc poly-	
Locks	Maple hardwood		swing door.....	383	ethylene film.....	284
deadbolt.....	flooring, solid.....	279	tri-view.....	384	Moisture barrier	
door, folding.....	molding.....	279	Medium density fiberboard		polyethylene.....	284
garage door.....	Maple strip flooring.....	281	molding.....	261	Moisture-resistant	
installation.....	Marble		Megatrade.....	297	drywall.....	243
patio door.....	countertop.....	376	Melard.....	367	Mold	
sash.....	floor tile.....	298	Membrane		abrading.....	537
sliding window.....	Listello tumbled tile.....	300	anti-fracture.....	305	blasting.....	537
window flip.....	mortar mix.....	306	fiberglass reinforcing.....	136	containment structure.....	536
Locksets	polyethylene.....	308	polyethylene.....	308	encapsulation.....	537
and deadbolt.....	setting adhesive.....	306	tile, anti-fracture.....	305	protective equipment.....	538
colonial knob.....	threshold.....	300	Memoirs pedestal		removal.....	537
egg knob.....	tile.....	298	lavatory bowl.....	366-367	sampling.....	535
installation.....	tile flooring.....	275	Mesh, crack repair.....	248	testing.....	535
keyed entry.....	Margin notch trowel.....	291	Metal conduit		Mold and mildew	
lever.....	Marine varnish.....	488	flexible.....	426	sanitizer.....	531
Log cabin siding.....	Markup vs. margin.....	7	galvanized.....	429	Mold inspection.....	535
Log home gloss finish.....	Masco.....	361, 372-373	Metal corner bead.....	247, 249	Mold remediation.....	535
Log lap siding.....	Mask, safety.....	250	Metal doors.....	194	by job size.....	526
Longstrip oak flooring.....	Masonite Corp.....	253	bi-fold.....	220	cleaning methods.....	528
Louver	Masonry		Metal primer.....	496	industrial hygienist.....	526
gable.....	chimneys, repair.....	104	rust converting.....	496	insurance coverage.....	525
roof.....	cleaning.....	115	Metal screen doors.....	203	sampling and protocol.....	527
roofing.....	demolition.....	30	Metallic grounding		Mold remediation	
Louver doors	fireplace demolition.....	115	bushing.....		protocol.....	535
painting.....	fireplaces.....	115	insulated.....	430	Mold Retarder.....	92
Louver windows.....	fireplaces, repair.....	104	Meter main load center.....	437	Molded face closet	
Louvered doors.....	furring.....	72	Meter socket.....	437	doors.....	220
Louvered exterior	insulation.....	87	Metro sheet vinyl		Molded sectional	
window shutters.....	joints.....	115	flooring.....	287	shower stall.....	357
Louvered vents.....	painting labor.....	476-478	Microwave oven		Molding	
Louvers	pointing.....	115	Advantium.....	342	base.....	263-264
midget.....	protective coating.....	495	over-the-range.....	342	base cap.....	260
roof.....	recycling.....	29	Midget louvers.....	91	base corner.....	259
wall.....	repainting.....	115	Milban.....	531	base shoe.....	260, 264
Low voltage wiring.....	veneer.....	103	Milban 1-2-3.....	536	bead.....	260
Low-Boy toilet kit.....	walls, waterproofing.....	130	Mildew resistant drywall.....	243	beaded baseboard.....	259
Low-boy, trash disposal.....	Masonry & concrete		Mineral fiber ceiling		brick.....	195
Low-sound bath fan	waterproofer.....	495	panel.....	257	casing.....	264-265
QuietTTest.....	Masonry & stucco paint.....	494	Mineral siding.....	93	casing paperwrap.....	265
Low-voltage light kit.....	Masterchem.....	492, 494	asbestos cement.....	94	casing polystyrene.....	265
L-straps.....	Mastic, tile.....	294	asbestos testing.....	94	cast.....	262
L-trim, drywall.....	Material costs.....	11	Mineral surface roll		chair rail.....	260, 262, 266
Lug load center	Mayfield sink.....	329	roofing.....	133	chair rail paperwrap.....	266
HomeLine indoor.....	Maytag.....	342	Mini can recessed light		chair rail polystyrene.....	266
Lumber	MDF		kit.....	440	chair rail prefinished.....	266
alternative building	casing.....	261	Miniature circuit breaker		colonial crown	
materials.....	chair rail.....	261	QO.....	439	paperwrap.....	268
deck.....	molding, base corner.....	261	Minwax.....	487-489, 491	cove.....	268
pressure treated.....	molding, colonial base.....	261	pickling stain.....	488	crown.....	259
recycled plastic.....	molding, crown.....	262	polycrylic.....	489	crown embossed	
Thompsonized.....	molding, plinth block.....	262	polyshades.....	488	polystyrene.....	268
Luna ceiling panel.....	molding, ultralite crown.....	262	polyurethane.....	489	crown polystyrene.....	268
	paneling.....	251	spar urethane.....	488	crown prefinished.....	268
	Mechanical systems,		Miracle Sealants Co.....	307	demolition.....	34
	repairing earthquake		Mirror bath light bar.....	441	embossed basswood.....	259
	damage.....	511	Mirrored doors		embossed decorative	
M	Medicine cabinet		bi-fold.....	221	hardwood.....	259
Magna.....	beveled edge.....	383-384	bypass.....	218	extruded polymer.....	263
Magnetic weatherstrip.....	bi-view.....	384	Mirrored sheet.....	171	hardwood.....	259, 280
Magnolia Brick and Tile.....	etched glass.....	383	Mirrors		hardwood floor.....	278
Mahogany doors.....	framed.....	383	frosted.....	382	hardwood parquet.....	282
Main circuit breaker.....	framed door.....	382	oval.....	382	heart pine.....	281
Main load center	frameless.....	383-384	vanity.....	382	inside corner.....	266-267
combination.....			Mission tile roofing.....	139	lamine flooring.....	284

- lattice 269
MDF colonial base 261
MDF ultralite crown 262
MDF, crown 262
medium density
fiberboard 261
oak, unfinished 281
outside corner 267
painting labor 479
panel 253
paperwrap 263-264
polystyrene 263-265
prefinished casing 264
primed finger joint
base 260
quarter round 261
reversible flute & reed 261
rosette block 259
round edge stop 261
spring cove 268
stool 261
stop 195, 269
stop paperwrap 269
stop polystyrene 269
stucco 196
T-astragal 194
Victorian hardwood
base 259
vinyl tileboard 270
wall base 284
wall, suspended
ceiling 255
Molding set, brick 260
Molding, crown 261
Molding, hardwood 279
rosewood 279
Monticello lavatory
faucet 373
Mop, roof 136
Mortar
acrylic admix 307
bedding 306
bonding 305-306
CustomBlend thin-set 306
epoxy 306
flexible bonding 306
porcelain 306
thin-set 306
thin-set tile 293
tile 294
tile repair 306
underwater tile repair 307
Mortar mix
glass block 306
marble & granite 306
Mosaic ceramic tile 304
Motion sensor security
light 443
heavy-duty 443
lantern 443
Moulding, hardwood 259
Mount Vernon paneling 251
Mounting assembly
disposal 340
Mounting bracket non-
metallic low voltage 422
Mounting kit, sink 334
Mud
joint cement 245
wallboard 246
Mullions, window 166
Multi gang switch box 425
Mushroom light fixture 442
- N**
Nail plate, stud 419
Nailer strip, carpentry 73
Nailers 73
Nailite siding 107
Nails
drywall 249
vinyl siding 107
National Electrical Code
(NEC) 410
National Estimator 8
Natural Images floor tile 289
Natural stone floor tile 299
Needle beams 62
Negative air scrubber 539
Neo-angle shower kit 358
Neptune 328
Neptune marble
countertop 376
New wood treatment 490
Nipple, rigid conduit 431
NM-B Romex sheathed cable
indoor & outdoor 418
NM-B Romex sheathed
indoor cable 417
Non-fibered roof and
foundation coating 129
Non-metallic
ceiling fan box 422
conduit fitting 421
low voltage device
mounting bracket 422
old work switch box 422
reducer bushing 420
sheathed cable 418
standard coupling 421
UF compression
connector 419
Non-metallic cable 417
Non-metallic sheathed
cable (Romex) 412
Northwoods hardwood
flooring 278
Notched trowels 291
NuTone 343, 378-382
Nylon carpet 308
Nylon paneling rivets 253
- O**
Oak
counter edge molding 268
hardwood flooring 278
molding, unfinished 281
parquet flooring 282
plank flooring 280
strip flooring 278, 281
Oak doors 192, 206, 210
entry 194
Oak fill strip 321
Oak threshold 195
OakCrest Products 282
Octagon box, drawn 425
Octagonal windows 163
Offset compression
connector, EMT-to-box 424
Offset screw connector,
EMT 423
Oil, Danish 488
Oil fired furnace 397
Oil gloss, polyurethane 495
Oil, teak 491
Oil, tung 491
Oil-based enamel 496
Oil-based floor finish
Varathane 489
Oil-based primer sealer 493
Oil-fired water heater 405
Old work switch box
non-metallic 422
Olefin carpet 308
Opal glass wall light 441
Open light kit 440
Openers, garage door 225
Opening, breakthrough
wall 72
Operators, window 166
Orange peel
ceiling 245
drywall texture 244
Oriental carpet, hang dry 531
Oriented strand board
siding 111
OSB
roof sheathing 77
shear wall 512
sheathing 66, 70
siding 111
subfloor 66
Outdoor ceiling fan 444
Outdoor wall lantern 443
Outlet box
connecting appliance 417
re-connect appliance 417
Outside corner bead,
drywall 248
Outside corner
molding 263, 267
colonial 267
paperwrap 267
polystyrene 267
polystyrene colonial 267
prefinished 267
Outside corner trowel,
drywall 250
Oval light fixture
outdoor bulkhead 443
Oven
double wall 342
microwave 342
microwave, above range 342
wall 342
Overhang, painting 479-480
Overhang painting,
difficulty 480
Overhead doors, garage 223
Owens Corning 130, 144
- P**
Pad, furniture 538
Paint
acrylic latex 492
alkyd 493
barn & fence 496
ceiling 492
elastomeric 494
flat 492, 494
floor & porch 495
gloss 493
house & trim 494
interior 492
latex 494
latex ceiling 492
latex interior 492
masonry & stucco 494
polyurethane oil gloss 495
satin flat 494
semi-gloss 493
semi-gloss latex 493
swimming pool 496
texture 493
wall & trim 492-493
waterproofing 494
Paint additive, Perlite
texturing 493
Paint seal removal 156
Paint stripping
labor 467
Painting
burn off, manhours 466
high-time difficulty
factors 466
Painting and finishing
application methods 464
exterior trim 463
paint color and gloss 462
penetrating stains 463
recoating 461
surface preparation 461
wood preservatives 463
Painting labor, manhours
acid wash 466
baseboard 468
blinds 481-482
bookcases 468
brick masonry 477
burn off paint 466
cabinets 469
caulking 466
ceiling texture 469
ceilings 469-470
closet shelf and pole 470
concrete floor 474-475
CMU 477-478
cutting-in 466
door frame and trim 471
drywall ceiling 484
drywall walls 483
eaves and cornices 480
entry doors 471
exterior doors 471
French doors 471-472
gutters and downspouts 476
handrail 481
house exterior 466
house interior 466
interior doors 471-473
louver doors 471
masking 466
molding 479
paneled walls 485
plaster or stucco 480-481
pressure washing 468
roof overhang 479-480
shutters 481-482
siding 482
stripping paint 467
trim 479
windows 486-487
wood deck 475
Paling, rail 455
Pan, shower 359
Pancake box, ceiling fan 425
Panel molding, FRP 253

Panel siding.....	98	Parquet molding.....	282	Memoirs.....	366	Plank floor clamp.....	281
cedar shingle.....	113	Parquet flooring.....		Memoirs base.....	367	Plank flooring.....	
fiber cement siding.....	112	Hevea.....	282	metal leg set.....	367	bamboo.....	280
fiber-overlaid plywood.....	99	oak.....	282	removal.....	367	heart pine.....	280
hardboard.....	98, 111	oak, self-stick.....	282	Repertoire.....	366	rustic oak.....	280
MDO.....	99	tile.....	282	Seychelle.....	366	wood.....	280
OSB.....	111	Parting stop molding.....	269	Williamsburg.....	366	Plank paneling.....	252-253
particleboard.....	98	Partition walls.....		Peel & Patch water- proofing.....	135	beaded.....	252
plywood.....	98, 111	adding.....	270	Peep sights.....	214	Edge-V.....	252
Panel wallcovering designer.....	252	removal.....	70	Pellets, dry ice.....	537	Plaster demolition.....	34, 242, 316
Panel, ceiling.....	253	Pass & Seymour/ Legrand.....	435	Penetrating stains.....	463	demolition, wet.....	533
acoustical.....	256	Passage latch, knob.....	213	Penetrating wood finish Preserva-Wood.....	487	painting.....	480-481
lay-in.....	257	Paste wax.....	491	Pergo.....	283	repair.....	514
lighting.....	258	Patch built-up roofing.....	131-132	finishing putty.....	283	veneer.....	246
suspended.....	255-257	drywall.....	248	flooring.....	283	Plaster of Paris.....	246
Panel, distribution disconnect & remove.....	437	Elastocaulk roof patch.....	136	flooring sealant.....	283	Plastering pool.....	460
Panel, electric service.....	439	Elastomastic roof patch.....	136	flooring underlayment.....	283	spa.....	460
Paneling beaded.....	251	flashing.....	135	installation.....	283	Plastic conduit.....	420
birch.....	252	Kool Patch cement.....	135	installation kit.....	283	gutters.....	146
demolition.....	252	PondPatch.....	136	lamine glue.....	283	lumber.....	457
fiberboard.....	251	popcorn.....	245	Presto floor molding.....	283	siding.....	107
FRP.....	253	roof caulk.....	136	Presto laminate flooring.....	283	Plasticized concrete.....	47
hardboard.....	251	roof cement.....	135	Pergola patio cover.....	459	Plate service entrance conduit sill.....	432
hardwood.....	252	roofing.....	134-135	Perimeter berm.....	530	single gang Decora wall.....	435
hardwood plank.....	251-252	roofing, cotton.....	136	Perimeter wall insulation.....	86	single gang plastic wall.....	435
MDF.....	251	roofing, wood shingle.....	137	Perlite texturing paint additive.....	493	stud nail.....	419
oak print.....	251	underlayment.....	285-286	Permanent Bond Adhesive.....	133	Plate cover, toilet base.....	364
pine plank.....	252-253	vinyl.....	285	Perma-Shield.....	216	Plate straps.....	513
plywood.....	251-253	Wet Patch roof cement.....	135	Pet doors.....	216	Plate, splash.....	344
prefinished.....	252	Wet Stick roof cement.....	135	Phone wall plate.....	433	Plates carpentry.....	64
rivets.....	253	Patching cement, roof.....	135	Picket fence staining labor.....	474	carpentry piecework rates.....	67
tileboard.....	251-252	concrete.....	50	Pickling stain white wash.....	488	Platinum lavatory faucet.....	373
trim pack.....	252-253	Patio cover, aluminum.....	459	Picture windows.....	162	Plexiglas.....	171
wainscot.....	253	Patio doors.....	214-215	Pier, concrete.....	63	Plinth.....	455
Panelized shingles.....	113	aluminum.....	214-215	Pine door casing.....	195	Plinth block.....	259
Panels fiberglass.....	140	aluminum, double.....	214	door casing, fluted.....	195	MDF primed.....	262
greenhouse.....	140	fiberglass, swinging.....	215	flooring trim.....	281	Plug connecting appliance.....	417
sun.....	140	gliding, vinyl.....	214	plank flooring.....	280	Plug-on circuit breaker, ground fault interrupter.....	440
Panic bar, door.....	226	grille.....	216	screen doors.....	203	Plumb bob.....	291
Panic door hardware.....	226	handles.....	216	siding.....	108-110	Plumb Shop.....	336, 341
Pantry cabinet.....	319-321	hardware.....	216	Pine doors.....	208	Plumbing and HVAC bathtub framing.....	395
doors.....	212	hinged, vinyl-clad.....	214	Pine jamb sets.....	209	framing for improve- ments.....	394
Paper Aquabar.....	87	installation.....	214	Pine planking.....	252-253	repairs, cutting floor joists.....	394
building.....	134	jamb extension kit.....	216	Pine square rosette molding.....	259	repairs, pricing.....	394
Moistop.....	88	locks.....	216	Pipe ABS.....	408	repairs, utility walls.....	395
Pyro-Kure.....	88	roller.....	216	ABS replacement of cast iron.....	408	Plumbing drain, waste and vent lines.....	393
roof flashing.....	88	screen.....	216	copper replacement of cast iron.....	408	Plumbing systems repair earthquake damage.....	511
roof underlay.....	88	screen & track.....	216	copper replacement of galvanized.....	408	Plumbing vent.....	389
Seekure.....	88	swinging, double.....	214	PVC DWV.....	408	relocate.....	389
vapor barrier.....	87	threshold.....	216	PVC replacement of cast iron.....	408	Plus 10 Exterior Stain.....	487
Paper holder toilet tissue.....	304	vinyl.....	215	Pipe flashing.....	143, 145	Ply 4 glass felt.....	134
Paper-faced metal trim.....	247	Patio roof.....	455	tile roof.....	145	Plywood roof sheathing.....	77
Paperwrap molding base.....	263	Patio screens replacement.....	216	Pitch pan.....	129	sheathing.....	66, 70
casing.....	264-265	Pavement concrete.....	46, 49	Pitch pocket.....	129	siding.....	111
chair rail.....	266	demolition.....	32	Pits, excavation.....	40	siding, T 1-11.....	111
colonial cap.....	264	Paver tile.....	299	Place n Press floor tile.....	289	subfloor.....	66
colonial crown.....	268	brick.....	300	Plain end 45-degree elbow.....	421		
inside corner & cove.....	266	Paving asphalt.....	51	Planing concrete.....	513		
outside corner.....	267	concrete.....	46, 49				
stop.....	269	demolition.....	32				
Parabolic troffer fluorescent fixture.....	258	Paving breaker, rental.....	28				
Parisa faucet.....	370	Pea gravel, concrete.....	46				
Parks Corporation.....	489	Pedestal lavatory Bahama.....	366				
		Classic base.....	367				
		leg set.....	367				

Plywood cap molding	263	Porcelain, glazed floor		steel, exterior, with		wire, solid brass.....	327
Plywood siding	99	tile	296	mini-blind	198	Pull bar	281
pre-finished	99	Porch		steel, half lite	198	Pull plates, door.....	213
Pneumatic breaker		columns	455	steel, installation	197	Pulling elbow, 90-degree ..	423
rental	28	columns, aluminum	455	Prelude	255	Pulls, edge, pocket door ..	222
Pocket doors		demolition	452	Premium Plus	495	Pump, water	540
edge pull	222	enclosure screen	458	interior flat paint.....	492	Pump mix concrete.....	46
hangers	222	misting system	458	primer sealer	493	Pumps, sewer.....	389
hardware	222	repair	452	satin flat exterior paint...	494	Purity siding.....	113
jamb	222	roof framing	455	Preserva products	487	Purlins, carpentry	76
kit, converging	222	screen frame	458	Preservative		Push bar, door.....	226
Pointing trowel	291	support posts	455	dock & fence post.....	490	Push plates, door	213
Pointing, masonry.....	115	Porch & floor enamel.....	495	wood.....	490-491	Pushbutton garage door...	224
Points, glazing	170	Porches		Preserva-Wood		Putty, finishing	283
Pole sander	251	additions	446	penetrating finish	487	PVA latex primer	491
Polish, Boston	491	balustrades	448	Pressure wash interior.....	530	PVC faucet supply.....	374
Poly bags	538	columns and posts	447	Pressure washer	540	PVC conduit	
Poly sheeting.....	536	elevated decks	448	Pressure washing		coupling	421
Polyblend ceramic tile		Porches and decks		manhours	468	elbow	421
caulk	307	choices in floor plank.....	450	Price Pfister	332-333,	Schedule 40	420
Polycarbonate sheet.....	171	inspecting for decay	445		337, 360-362,	Schedule 80	420
Polycast kitchen sink	330	maintenance	451		370-371, 373	PVC conduit body.....	421
Polycrylic protective		Portland cement, stucco... 114		Primed finger joint casing		PVC conduit clamp,	
finish	489	Portrait whirlpool bath.....	354	colonial	260	Snap Strap	420
Polyester stress-block		Post base, plinth.....	455	ranch	260	PVC pipe	408
fabric.....	136	Posts		Primed finger joint molding		DWV	408
Polyester carpet	308	basement.....	63	base	260	PVC service entrance	
Polyethylene film	40, 87	cap	456-457	base cap	260	cap.....	422
moisture barrier	284	carpentry	63	base shoe.....	260	Pyro-Kure paper	88
Polyethylene membrane		deck	452-453, 456	bead	260		
Schluter Ditra	308	jack posts	63	brick	260		
Polymer molding.....	263	porch	452, 455	chair rail	260		
Polyshades polyurethane		wood	455	crown	261		
stain	488	Pouring insulation	87	flute and reed	261		
Polystyrene casing ... 264-265		Power attic gable vents	92	quarter round	261		
reversible	266	Power distribution box	540	stool	261		
Polystyrene insulation ... 85, 86		Power massage shower		Primed tilt double-hung			
Polystyrene molding		head	362	windows.....	163		
base	264	Power vent, gas water		Primer			
base embossed	263	heater	407	adhesive	282		
chair rail	266	Power ventilators		bonding.....	493		
crown	268	attic gable	92	clean metal	496		
crown embossed	268	roof-mount	92	concrete.....	493		
embossed	265	Power washing	468	epoxy	496		
inside corner	267	PowerStar	407	flooring	285		
lattice	269	PowerStream	407	gypsum wallboard	246		
outside corner	267	Power-vent		latex	491		
spring cove	268	water heater	405	metal	496		
stop	269	PPE	538	resilient flooring	285		
Polyurethane		Pre-drying	529	rusty metal.....	496		
fast-drying.....	489	Prefinished molding		water-based.....	492		
oil gloss	495	casing	264-265	Primer sealer	494		
stain	488	chair rail	266	oil-based	493		
Polyurethane cast		crown	268	stainblocker	494		
molding	262	inside corner	267	Privacy latchset	213		
chair rail	262	inside corner & cove.....	267	Pro Finisher	489		
corner block.....	262	outside corner	267	Propane water heater.....	405		
cross head	262	Prefinished paneling	252	Propane-fired water			
frieze	262	Prehung doors	209-211	heater	405		
rope	262	double	212	Protection, tile edge.....	303		
PondPatch	136	exterior	198	Protector wood	490		
Pool paint	496	fire-rated	197, 211	ProtectoWrap	307		
Pool replastering	460	French	212-213	Protocol, mold			
Popcorn ceiling		hardboard	197	remediation.....	535		
patch	245	heater closet.....	210	Provisa range hood	343		
spray	244	installation	197	Pro-Wall 3	354		
spray texture.....	244	interior.....	212	P-trap remove &			
Porcelain		oak	212	replace	352		
bath accessory set	305	pantry	212	Pull			
mortar	306	patio, steel	215	brass-plated spoon-foot... 327			
towel bar	305	steel	199-200	cabinet.....	326-327		
				S swirl.....	327		
				wire	327		

Q

QO circuit breaker	
GFI plug-on	440
main.....	438
miniature.....	439
tandem	439
QO load center ground	
bar kit.....	440
QO main lug load	
center	438-439
Quarry tile	299
Quarrybasics	299
Quarter round	
bamboo	280
floor molding... 278-280, 284	
molding	263
primed finger joint.....	261
Quick Roof.....	135
QuickBooks	10
QuietTTest bath fan.....	380
Quietzone	86
Quik-Tape.....	248
Qwik-Gard	440

R

RACO	424-426
RADAR Illusion	
ceiling panel	257
Radiant heating systems...	392
Radiator	
cast iron.....	398
Rafter	
bay vent channel	88
spacing	88
Rafters	
demolition	33
rough carpentry	75
Ragione	296

Rail		floor molding.....278-279	Resilient tile		bow window.....164
deck.....456		lamineate flooring.....284	adhesive.....290		built-up.....132
painting.....481	Reducer floor		demolition.....35		cant strips.....86
sink.....302	molding.....279-280		removal.....278		deck.....455
Rail molding	Reducer strip		Resin siding.....107		demolition.....33
chair.....266	tile.....304		Respirator.....538		flashing.....88
embossed polystyrene...266	vinyl flooring.....292		sanding drywall.....250		flashing, removal...134
embossed prefinished...266	Reducing window		Retaining wall forms.....47		flashing, self-adhesive...134
paperwrap.....266	opening size.....156		Reversible doors.....194		insulation.....86
prefinished chair.....266	Reducing bushing		Reversible flute & reed		louver.....91, 145
Railing	non-metallic.....420		molding		membrane.....132
patio deck.....455	rigid or IMC.....430		primed finger joint.....261		patch.....135
Rain cap, chimney.....400	Redwood		Reversible polystyrene		patch, shingle.....137
Rain gutters.....146	siding.....109		casing.....266		patio.....455
aluminum.....146	vents.....90		R-Gard insulation.....86		patio cover.....459
galvanized steel.....146	Reed & flute molding.....261		RhinoBoard.....295		sagging ridge board.....59
Ranch base paperwrap	Refinishing in-ground		Ribbands.....73		sheathing, OSB.....70, 77
molding.....264	spa.....460		Ribbons, carpentry.....73		sheathing, plywood.....77
Ranch casing.....195, 265	Reinforcing		Ridge and hip shingles...130		silicone coating.....141
Clearwood PS.....265	bars.....44		Ridge shingles.....131		tile, clay.....139
paperwrap.....265	membrane, fiberglass...136		Ridge vent.....144		tile, concrete.....140
polystyrene.....265	slab.....47		aluminum.....90		trusses.....76
primed finger joint.....260	steel.....44		Cobra Rigid.....145		underlay.....88
Ranch door casing	steel, galvanized.....45		coil.....90		urethane spray foam.....140
primed finger joint.....195	Remediation		rigid.....145		Roof and foundation
Ranch stop molding.....269	dry rot.....92		shingle-over.....145		coatingnon-fibered.....129
Random textured	mold.....535		VentSure.....144		Roof apron.....143
ceiling panel.....255	Removal		Rigid conduit		Roof caulk.....136
Range hood.....343	appliance.....530		coupling.....429		Roof cement.....135
Ballista.....343	carpet.....531		strap.....431		wet patch.....135
custom.....344	fixture.....530		Rigid insulation.....85		Wet-Stick.....135
Provisa.....343	glazing putty.....170		Rigid steel conduit		Roof coating
vented.....343	skylight.....172		elbow.....429		acrylic.....137
RCA.....433	window.....156		galvanized.....429		aluminum.....137
Ready-mix concrete.....46	window glass.....170		installation.....429		elastomeric.....137
Rebar.....44	windows.....156		removal.....429		fibered.....137
Rebond.....308	Remover		Ring type meter socket...437		silicone.....137
Receptacle	adhesive.....282		Rings, towel.....385-386, 388		Snow Roof.....137
appliance flush mount...435	flooring adhesive.....285		Rivets.....255		Roof covers.....164
CO/ALR duplex.....435	Rental		paneling.....253		Roof deck
duplex.....435	air mover.....539		Robe hook.....385-386, 388		removal.....129
duplex straight blade...434	dehumidifiers.....538		Roberts.....282		repair.....129
GFCI.....435	dry ice blaster.....537		Rock, recycling.....29		walking.....140
GFCI, hospital grade....435	floor drying system.....539		Rocker switch, Decora		Roof edge flashing...143-144
remove.....434	generator.....540		AC quiet.....434		Roof exhaust vent T-top...145
side-wired single.....435	gypsum panel lift.....250		Rockwool insulation.....87		Roof flashing
Receptacle cover	negative air scrubber...539		Rod clamp, ground.....432		chimney.....400-401
GFCI, wet location.....428	remediation equipment...538		Roll, screen.....168		service entrance.....432
horizontal duplex	wall cavity dryer.....539		Roll flashing		Roof framing.....75
weatherproof.....428	Repainting a home.....466		aluminum.....141		jacking.....75
Recessed bathtub	Repair shingles, tin.....144		copper.....141		Roof jack.....145
Princeton.....353	Repair clips, drywall.....249		Roll roofing.....134		rubber.....145
Recessed light kit.....440	Repair kit		mineral surface.....133		Roof loading.....140
Recessed lighting.....440	drywall.....248		Roll valley flashing.....143		Roof openings, cut
Recoating.....461	toilet.....364		Roller		for skylights.....172
Rectangular weather-	Repair mesh, crack.....248		extendable.....291		Roof overhang
proof box.....427	Repair patch, drywall...248		painting labor.....468		painting.....479-480
Recycler fees.....29	Repairs, door.....191		Roller spline tool.....168		adding.....61
Recycling	Repertoire pedestal		Rollers, door, patio.....216		Roof patch
fees.....29	lavatory bowl.....366		Roll-on		cotton.....136
Red cedar, western,	Replace-A-Vent.....89		texture, acoustic.....493		rubberized.....135
siding.....108	Replacement screen		texture, stucco.....493		Roof patching cement,
Red Dot.....427-428	doors.....203		Rollup doors, garage.....223		white.....135
Red oak	Replacement windows		Roman tub		Roof repair.....58
plank flooring.....280	vinyl.....157		filler.....354		Roof sheathing.....60
strip flooring.....278, 281	vinyl double-hung.....157		trim & rough-in.....354		Roof turbine vents.....91, 146
Red rosin sheathing.....87	vinyl single-hung.....158		Romex.....412		Roof vent
RedGard waterproofing	Replastering		Romex sheathed cable		repair, waterproofing...130
membrane.....305	pool.....460		indoor.....417-418		waterproofing.....130
Reducer	spa.....460		indoor & outdoor.....418		Roof vent kit, bath.....382
bamboo.....280	Resilient flooring, sheet		Roof		Roof ventilation.....83
carpet.....284	vinyl.....274		bay window.....164		

Roof waterproofing	135	Rosewood		Sanded grout	307	Screws & clips, sink	
repair	129	hardwood flooring	279	Sander		mount	329
replace	130	flooring trim	279	drywall	250	Scribing felt	291
Roofing		Roto hammer rental	28	gypsum wallboard	251	Scrubber, negative air	539
asphalt	132	Rough carpentry	53	Sanding hardwood floor	281	Seal, garage door	223
base sheet	133	backing and nailers	73	Sanding sealer,		Seal & tile gloss	308
broom with scraper	136	bracing	67	waterborne	489	Sealant, laminate flooring	283
built-up	132, 134	ceiling joists	73	Sanding sponge	250	Sealer	
built-up, patch	131-132	ceilings and joists	73	Sanding system		concrete	495
built-up, tear-off	129	collar beams	75	drywall	251	exposed aggregate	495
cement trowel	136	collar ties	75	dustless	251	grout	308
clay tile	139	curbs	75	Sanding, paint prep		high-gloss finish	307
concrete tile	140	dormer studs	75	manhours	466-467	oil-based	493
demolition	33	floor joists	64	Sand-Texture wall texture	493	painting	483-484
felt	133	floor trusses	65	Sash		primer	493
fiber-cement slate	139	furring	72	balance	166	sanding	489
fiberglass panels	140	girders	62	cord repair	156	sill	86
flashing, removal	134	joists	68	lift	166	tile	308
flashing, self-adhesive	134	ledger strips	73	locks	166	tile & stone	307
galvanized	138	plates	67	springs, wood window	166	water-based	492
granules	136	posts	63	window, repair	156	waterproofing	495
gravel	132	purlins	76	Saturated cotton roof patch		Sealer primer	
membrane	132	rafters	75	asphalt	136	stainblocker	494
mop	136	ribbons	73	Savannah lavatory faucet	373	water-base	494
patch	135	roof trusses	76	Sawing concrete slab	50	Sealer's Choice 15 Gold	307
roll	133-134	sill plates	64	SBS field adhesive	134	Sealing conduit locknut,	
sheet metal	138	studding	66-67	ScapeWel window	172	steel	430
sheets	138	subflooring	66	Schedule 40 PVC		Seal-Krete	495
shingle remover	136	trimmers	75	conduit	420	Seam coating kit	291
shingle starter strip	131	wall openings	72	Schedule 80 PVC		Seats, toilet	365-366
shingles, algae-		wall studs	66	conduit	420	SEBS styrene-ethylene-	
resistant	130	window openings	72	Schluter Ditra poly-		butylene-styrene	
shingles, architectural	130	Round conduit box		ethylene membrane	308	asphalt	135
shingles, asphalt		non-metallic	428	Schluter Systems	303-304,	Security doors	205
fiberglass	130-131	Round edge stop		Scotchguard	308	heavy-duty	205
shingles, hip and ridge	131	molding	261	Scratch coat, plaster	532	Security doors, Paradise-	
slate	139	Royal Mouldings	263-270	Screed coat, plaster	114	style	205
tar	132	Royelle vinyl sheet		Screed, rental	39	Security gates, folding	205
tear-off	129	flooring	287	Screen		Security light, motion	
tile	140	Rub, carborundum	50	aluminum rolls	168	sensor	443
tile, clay	139	Rubber		fiberglass rolls	168	Security storm doors	205
tools	136	mallet	291	frame kit	167	Seekure paper	88
Roofing cement, built-up	133	roof jack	145	patch	168	Seismic safety standards,	
Roofing fabric, asphalt	131	wall base	292	porch enclosure	458	earthquakes	497
Roofing louver,		wet patch roof cement	135	spline	168, 459	Self-stick	
galvanized	145	Rubber studded tile	290	window	168	parquet flooring, oak	282
Roofing material,		Rubber tile adhesive	290	Screen doors		vinyl wall base	293
for new roof	122	Rubberized roof patch	135	hardware	203	wall base	293
built-up	127	Rust resistant finish	496	installation	202-203	Self-storing storm doors	204
modified bitumen		Rustic oak plank flooring	280	metal	203	Self-tapping screws	141
(APP and SBS)	127	Rustic siding, pine	108, 110	pine	203	Semco	305
shingles, asphalt-		Rust-Oleum	488-489, 496	replacement	203	Semi-gloss	
fiberglass (composition)	124	S		security, steel	203	latex paint	493
shingles, wood	123	Sack finish	50	steel, replacement	203	wall enamel	492
Roofing materials, life		Saddle & sill	300	vinyl	203	Senco	249
expectancy	121	Safety respirator mask	250	wood	203	SensAire wall control	
Roof-mount power		Safety Zone vinyl floor		Screen frame	458	switch	382
ventilator	92	tile	289	Screen vents	89	Sentinel Products	285
Roofs		Sahara ceiling panels	256	Screen wire	458	Sentinel sheet vinyl	
flashing leaks	118	Saltillo		Screens		flooring	287
how to measure area	128	ceramic floor tile	299	patio door	216	Septic disposal cartridge	340
repairs	121	grout mix	307	window	160	Sequentia	253
source of leaks	117	Salvage, demolition	35	Screw gun, drywall	249	Service entrance	
Roof-to-wall flashing	144	Sampling, mold	535	Screwdriver, drywall	249	cap	432
Rope cast molding	262	San Marino ceiling fan	444	Screwdriver bit, drywall	250	cap, PVC	422
Rope crown cast molding	262	Sand, fill	40, 49	Screw-in connector, flex	426	device, combination	438
Roppe	292-293	Sand & Kleen	251	Screws		elbow	432
Rosette molding	259	Sandblasting		deck	459	meter main load center	437
square	259	manhours	467	drywall	249	roof flashing	432
Rosette set	195	masonry	115	drywall to steel	249	Service entrance conduit	
				drywall to wood	249	sill plate	432
				lag, drill tip	255	Service panel, electric	439
				self-tapping	141		

Set screw connector	Shingle starter strip	131	corrugated	113	Single-hung windows	158,
EMT	Shingles	34	demolition	34		160-161
Setting adhesive, marble	algae-resistant	130	fiber cement	112	Single-texture drywall	
& granite stone	architectural	130	fiber cement shingles	113	brush	250
Seychelle pedestal	asphalt	130	hardboard	100	Sink	
lavatory	asphalt, repair	130	hardboard lap	112	bathroom	367-369
bowl	cedar	138	hardboard panel	111	frame	334
Shake felt	demolition	33	lap	110	hardware	329
Shakertown siding	fiberglass asphalt	131	log cabin	110	lavatory	367-369
Shakes	hip and ridge	131	mineral	93-94	mounting kit	334
siding, replacement	interlocking	130	mounting block, fixture	107	removal	315
cedar	lamine	130	Nailite	107	strainer shank nut	336
Shank nut sink strainer	panelized	113	OSB	111	under counter mount	368
Shaping slopes	roofing	130	painting	482	Sink rail, ceramic	302
Shaw HardSurfaces	siding	113	panel	98	Sink trap remove &	
Shear wall	siding, replacement	105	panelized shingles	113	replace	352
Sheathed cable	slate	139	pine	108	Sink, lavatory	
indoor	tin repair	144	pine rustic	108, 110	Hydra	369
indoor & outdoor	wood	137	pine shiplap	110	Magnolia	369
Romex	wood, repair	137	plywood	99, 111	Morning	369
Type NM-B Romex	ShockWave	536	redwood	109	Reminiscence	369
Sheathing	Shoe molding, base	264	removal	106	Sinks	
board	Shower & bathtub		repair	105	bar	337-338
carpentry	units	356-357	resin	107	bowl	337
demolition	Shower & tub faucet		shingle	113	Breckenridge	331
insulated	single control	360	shingle and shake	100	Cambridge	331
plywood	single-knob	360	shingles, replacement	105	cast iron	329-330
roof	Shower base	358	southern yellow		composite	330-331, 338
T 1-11	Shower curtain rod,		pine	109-110	double bowl	328, 330
Sheathing paper	permanent	389	staining	482	double bowl composite	331
Sheet	Shower door	356	T 1-11 plywood	111	entertainment	338
acrylic	bypass	360	thermoplastic	107	kitchen	329-331
mirrored	hinged	359	touch up paint	108	kitchen, basket strainer	335
Plexiglas	pivot	359	trim	114	mounting clips	329
Sheet flooring	swinging	359	vinyl	96, 107	polycast	330
adhesive	Shower faucet	360-362	western red cedar	108	Silhouette polycast	330
removal	lever handle	361	wood	93	single bowl	328, 330
vinyl	single-knob	360	wood, diagonal	97	stainless steel	328-329
Sheet metal	Shower head		wood, horizontal	97	stainless steel kitchen	328
gutters, downspouts	power massage	362	wood, vertical	97	stainless steel single	
roofing	remove & replace	352	Siding & deck stain	487	bowl	328
Sheetrock	sunflower	362	Siding and roofing, metal	247	utility	337
ceiling panel	Shower pan	359	Siding installation,		Skid steer loaders rental	39
demolition	Shower stall	357	removing old siding	95	Skimcoat patch &	
fire code	demolition	357	Siding, estimating		underlayment	286
flexible	smooth wall	357	procedure	104	Skylight removal	172
installation	three-piece	358	Signature kitchen faucet	332	Skylights	
painting	Shower stall kit		SilentStep	283	acrylic	173
repair	neo-angle	358	Silestone countertop	323	cut roof opening	172
water resistant	round	358	Silhouette polycast		fixed	172-173
Sheets, roofing	Showers	356-357	kitchen sink	330	trimmers	75
Shelf	corner entry kit	358	Silicone roof		tubular	172
bath, with glass	fiberglass	357	coating	137, 141	venting	173
bathroom	stall	357	Silicone sealant		Slab doors	192-194, 206-207
corner	stall kit	357	window caulk	157	installation	191
glass	stall kit, add-on	362	Siliconizer crack filler	136	Slab leveling	513
painting	ShowMe	8	Sill		Slabs	
Shellac, amber	Shutters		door, thermal	195	base	49
ShellGard RTU	painting	481-482	window	165	calculating area	42
Shelves, painting labor	remove and replace	106	window, ceramic	301	concrete	46
Sherwin-Williams	window	167	Sill & saddle	300	finishes	49
Shield, ice & water	Sidelites, steel door	198	Sill plate, service		forms	43
Shim shingles	Sidewalk demolition	31	entrance conduit	432	garage	42
Shims	Sidewalks, concrete	46, 49	Sill plate gasket	86	on grade	49
flooring	Side-wired receptacle,		Sill plates	64	repair	37
stud	single	435	removal	63	Slate	
Shingle flashing	Siding	107, 112	Sill sealer	86	floor tile, natural	299
Shingle and shake siding	accessories, mounting	107	Single bowl kitchen sink		roofing	139
furring, estimating	aluminum	93, 114	stainless steel	328	tile, tumbled	300
Shingle panels	aluminum corrugated	113	Single gang wall plate	435	Sleepers, carpentry	73
Shingle siding	cedar	108	Single receptacle			
cedar	cedar T&G	109	side-wired	435		

- Slide dimmer
illuminated 436
incandescent 436
Sliding windows 161-162
Sloan Royal flush valve 363
Slopes, shaping 41
Slot aperture light kit 440
Smart home electrical
management system 444
Smoke alarm, dual
sensing 436
Smoke and CO Alarm 436
Smoke detectors 416
basic 436
dual sensing 436
dual-ionization 436
Snap Strap PVC conduit
clamp 420
Soaker bathtub 353
Soap dish 386-388
ceramic 304
porcelain 305
Soap dispenser 335
Soffit
painting 479-480
wood 73
Soffit vents, louvered 89
Soffits
aluminum 114
demolition 34
fiber cement 112
kitchen 316
pendent lighting 316
refrigerator, under
counter 316
removal 106
stucco 114
vinyl 108
Soil compaction 41
Solar lens 172
Solid core doors
birch exterior 192, 197
entry 193
fir entry 193
hardboard exterior 192, 197
hardboard interior 207
hardwood exterior 192
lauan exterior 192
prehung exterior 197
red oak 192
red oak exterior 192
Solid surface countertop 322
Solitaire bath fan 381
Sound baffle, removable 340
Sound control 86
Soundbloc foam
underlayment 283
Southern yellow pine
siding 109-110
Spa replastering 460
Spacer, laminate flooring 283
Spacing, rafter 88
Spanish tile roofing 139
Spar urethane
Helmman 488
Spar varnish, marine 488
Spatter ceiling 245
Spatter drywall texture 244
Speaker wire 433
Speed-Wall
interior latex enamel 493
PVA latex primer 491
Spider box, electric 540
Spin-N-Lock sink strainer 335
Splash plate 344
Spline
screen, porch 459
tool 168
window screen 168
Split system, remove 398
Sponge, sanding, drywall 250
Spray adhesive 249
Spray painting, labor 468
Spray texture 244-246
ceiling 244
wallboard 244
Spreading soil 41
Spring cove molding 268
Spring wound timer
in-wall 436
Springs
garage door 223
garage, extension 225
window sash 166
Spruce lap siding 110
Square box
surface cover 425
welded 425
Square D 437-440
Square rosette molding 259
Squeeze connector, flex 427
Stain
acrylic interior &
exterior 487
concrete 495
deck 487
deck & siding 487
Deck Plus 487
exterior 487
gel 488
Plus 10 487
polyurethane 488
siding 487
white wash 488
wood 488
Stainblocker
primer sealer 494
water-based 492
Staining labor, manhours
ceiling 470
fascia 473
paneled walls 485
picket fence 474
siding 482
wood deck 475
Stainless steel sink 328-329
double bowl 328
single bowl 328
Stair nose 284
bamboo 280
molding 278-280
Stair stringers, basement 226
Stairs
basement 226
deck 457-458
demolition 35
porch 457-458
stringers 458
Stall kit, shower 357
add-on 362
corner entry 358
neo-angle 358
round 358
Stall, shower 357
fiberglass 358
Stamped concrete 50
Stanadyne 334, 360
Standard coupling
non-metallic 421
Standard radius elbow 421
Starter strip 131
Starter strip, aluminum
siding 114
Steam cleaning, masonry 115
Steel conduit
elbow 429
elbow, rigid or IMC 429
galvanized rigid 429
Steel doors
entry 199-200
exterior 198-199
exterior, with mini-blind 198
frames 194
garage 223
installation 197
screen 203
Steel octagon box cover 426
Steel sealing conduit
locknut 430
Stem wall 48
Step flashing 141, 144
copper 141
Sterling Plumbing 354-355
Stile & rail doors 208
Stilts, drywall 250
Stone
base 49
cleaning 115
countertops 323
floor tile 299
roofing 139
sealer 307
setting adhesive 306
slate 139
tile, travertine 298
tile, tumbled 300
Stonit 139
Stool molding primed
finger joint 261
Stop, gravel 142
Stop fixture supply 364
Stop molding 195
colonial 269
paperwrap colonial 269
parting 269
polystyrene colonial 269
polystyrene ranch 269
ranch 269
round edge 261
Stopper, drain 336
Stops Rust 496
Storage, off site 538
Storage cabinet
bath 383
etched glass 383
Store-in-Door 204
Storm collar
chimney 400-401
Storm doors 204-205
aluminum 205
full-view 205
removal 204
security 205
self-storing 204
triple-track 204
woodcore 205
Storm windows 149, 165
remove and replace 106
StormGuard 88
Straight blade receptacle
duplex 434
Straightening framing 514
Strainer
junior basket 338
sink shank nut 336
Strainer, basin remove
& replace 352
Strap
EMT 424
rigid conduit 431
Straps
framing 512
hardware 513
T 513
tie 513
Stress-block fabric
polyester 136
Stretch wrap 538
Stringers, deck stair 458
Strip, transition 292
Strip flooring
laminate 284
maple, unfinished 281
natural wood 279
red oak 281
white oak 281
Stripping
forms 44
soil 41
Stripping paint labor 467
Strips
asphalt roofing starter 131
cant 137
shingle starter 131
Structoglas 253
Stucco
knockdown 493
molding, redwood 196
paint 494
painting 480-481
plastering 114
portland cement 114
removal 106
repair 103, 105, 514
soffit vents 89
texture 493
wall assembly, wood
framed 71
Stud sensor, electronic 249
Stud straightening 67
Stud wall, demolition 33
Studding 66
Studs
carpentry piecework
rates 66
dormer 76
straps 513
wall assemblies 66
Stump grinder, rental 28
Stump grinding 29
Stylistik II floor tile 289
Styrene suspended
lighting panel 258
Styrene-ethylene-butylene-
styrene asphalt 135

Subfloor	fish.....	417	Tile	Tile accessory set,	
board sheathing.....	tile backer.....	249	accessories, ceramic.....	porcelain.....	305
OSB.....	Tape-on bead.....	247	accessories, toilet	Tile adhesive	
plywood.....	Tapping block.....	281	tissue holder.....	ceramic.....	293
Subflooring	TapTight		accessories,	resilient.....	290
installation.....	hardwood flooring.....	280	toothbrush holder.....	rubber.....	290
piecwork rates.....	hardwood molding.....	280	accessories, towel bar...	stone.....	306
Sump pump.....	Tar, roofing.....	132	acoustic, demolition.....	thin-set.....	306
Sundial vinyl sheet	T-astragal.....	194	anti-fracture membrane...	vinyl.....	290
flooring.....	Teak flooring.....	279	anti-fracture membrane	Tile adhesive caulk,	
Sunflower shower head...	Teak oil.....	491	kit.....	ceramic.....	307
Supply lines.....	Tear-off, roofing.....	129	backerboard.....	Tile backer.....	245
toilet.....	Temporary wall bracing....	67	bullnose, ceramic... 301-302	Tile backer tape.....	249
Supply stop.....	Termin-8 wood		carpet.....	Tile backerboard.....	295
Surface box cover,	preservative.....	490	ceiling.....	Tile cutter, vinyl.....	291
square.....	Terrazzo, demolition.....	35	ceiling, acoustical.....	Tile flooring, cork.....	275
Surface preparation	Testing, mold.....	535	ceiling, tin design.....	Tile forms.....	355
flooring.....	Textolite counters.....	322	ceiling, wood fiber.....	Tile kit, bathtub.....	355
labor.....	Texture		ceramic caulk.....	Tile Perfect.....	307
manhours.....	paint.....	493	ceramic floor.....	Tile repair	
Surface preparation for	paint additive.....	493	ceramic floor & wall.....	mortar.....	306
painting or finishing.....	roll-on.....	493	ceramic wall.....	mortar, underwater.....	307
Surround, bathtub.....	Sand-Texture wall.....	493	ceramic, demolition.....	Tile tool, ceramic.....	291
Surround kit	stucco.....	493	clay, roofing.....	Tile tub wall.....	354
bathtub.....	Texture 1-11 plywood		concrete roof.....	Tile underlayment	
tub wall.....	siding.....	111	demolition.....	Aqua-Tough.....	295
Suspended ceiling	Texture brushes, drywall...	250	edge protection.....	Tile wall kit.....	355
demolition.....	Texture spray, gypsum		finish.....	Tile, ceiling, zero	
installation.....	board.....	244	floor.....	clearance grid system ...	255
installation kit.....	Texture touch-up kit		glazed ceramic.....	Tileboard	
light kit.....	acoustic ceiling.....	244	glazed porcelain.....	batten.....	251
lighting panel.....	Texture, drywall.....	244	gloss & seal.....	embossed.....	251
panel.....	ceiling.....	245	granite.....	Tileboard molding, vinyl...	270
panel, acoustical.....	spray.....	244, 246	granite floor.....	Tilt double-hung windows ...	163
Suspended ceiling	Textured ceiling panels ...	257	grout.....	Timberline Ultra.....	130
panel.....	Textured lap siding.....	111	grout, sanded.....	Timbertex.....	131
systems.....	Texturing paint additive		installation.....	Timer, in-wall, spring	
Suspended ceilings.....	Perlite.....	493	marble.....	wound.....	436
Sweep, door.....	The Association of Bay		marble floor.....	Timer switch.....	382
Swimming pools	Area Governments.....	500	mortar.....	Tin repair shingles.....	144
paint.....	Themes sheet vinyl		mosaic ceramic.....	Tissue holder.....	387-388
refinishing.....	flooring.....	287	natural cork.....	TJI joists.....	65
Switch	Thermal expansion tank...	406	non-sanded dry grout...	T-molding.....	280
AC quiet toggle.....	Thermal sill.....	195	parquet floor.....	bamboo.....	280
Decora AC quiet rocker	Thermoplastic siding.....	107	paver.....	wood floor.....	279
remove.....	Thermostat, floor		Place n Press floor.....	hardwood.....	279
sink top.....	warming system.....	305	polyethylene	Toggle switch, AC quiet ...	434
Switch & cover.....	Thermostat cable.....	433	membrane.....	Toilet base plate cover ...	364
Switch box	THHN copper wire,		quarry.....	Toilet bowl	
drawn 2-device.....	gauge.....	432	reducer strip.....	gasket.....	364
multi gang.....	Thin-set mortar.....	306	repair, mortar.....	reset.....	352
non-metallic old work ...	CustomBlend.....	306	resilient, demolition.....	Toilet fill valve	
Switches	Thompson's.....	490	roofing.....	anti-siphon.....	364
fan control.....	Thompsonized decking		rubber studded.....	remove & replace.....	352
timer, exhaust fan.....	lumber.....	454	Saltillo ceramic floor	Toilet flange, cast iron	364
	Thoro.....	495	sealer.....	Toilet paper holder ... 385-386,	
	Thorseal protective		sealer, high-gloss.....		388
	coating.....	495	setting with adhesive.....	recessed.....	386
	Threaded conduit body....	431	setting with mortar.....	Toilet repair kit.....	364
	Three gang box		slate floor.....	Toilet seat	
	Super Blue, non-		thin-set mortar.....	cushioned vinyl.....	366
	metallic.....	422	travertine floor.....	molded wood.....	365
	Threshold		tumbled marble listello ..	natural maple.....	366
	ceramic.....	301	tumbled slate.....	plastic open-front.....	365
	high boy.....	195	tumbled stone.....	wood.....	365
	marble.....	300	vinyl composition ... 289-290	Toilet supply line.....	364
	patio door.....	216	vinyl floor.....	Toilet tank bolt kit.....	364
	Thru-the-wall utility fan ...	380	wall.....	Toilet tissue paper	
	Thrutone.....	139	wall, ceramic.....	holder.....	304-305
	Thru-wall furnace, gas....	404	wood flooring.....	Toilet To Go Kit.....	362
	Tie straps.....	513			
	Ties, collar.....	75			

T

T 1-11 plywood siding.....	111
T molding.....	284
wood floor.....	278
Tall boy water heater.....	405
Tall Elite.....	355
Tamping, excavation.....	41
Tandem circuit breaker....	439
Tank, thermal expansion...	406
Tape	
acrylic.....	291
corner bead.....	249
drywall.....	246
drywall joint.....	246

- Toilets
 cadet..... 362
 Cadet..... 363
 Champion..... 363
 Comfort Height..... 363
 compact..... 362
 Gabrielle..... 363
 Hamilton..... 363
 hook-up kit for low-boy... 364
 one-piece..... 363
 pressure assist..... 363
 San Raphael..... 363
 urinals..... 364
 wall-mount..... 363
 Williamsburg..... 363
- Tongue and groove
 siding, cedar..... 109
- Tools
 ceramic tile..... 291
 drywall..... 249-251
 glazing..... 171
 roof repair..... 136
 spline..... 168
- Toothbrush & tumbler
 holder..... 305
- Toothbrush holder... 385-386,
 388
 porcelain..... 305
- Top, laminated
 plastic..... 323-324
- Topping compound
 wallboard..... 246
- Topping, concrete..... 50
- Topsoil, excavation..... 41
- Torsion springs..... 223
- Touch control lavatory
 faucet..... 371
- Touch-up kit
 spray texture..... 244
 wood floor..... 278
- Towel bar..... 385-388
 ceramic..... 305
 porcelain..... 305
- Towel ring..... 385-388
- Track, patio door..... 216
- TrafficMaster laminate
 flooring..... 284
- Transit mix concrete..... 46
- Transition reducer strip
 vinyl flooring..... 292
- Transition strip
 carpet to tile..... 292
 oak to tile..... 292
- Trap, lavatory, remove
 & replace..... 352
- Trash bins..... 29
- Trash compactor removal... 315
- Trash pump..... 540
- Travertine
 floor tile..... 299
 stone tile..... 298
- Treads, concrete, finishing... 49
- Treatment, wood..... 490
- Tree removal..... 29
- Trenchers, rental..... 39
- Trenching..... 41
 hand..... 40
- Trim
 aluminum siding..... 114
 bamboo flooring..... 280
 door..... 194
 fiber cement siding..... 112
 hardwood flooring..... 281
 heart pine flooring..... 281
 painting labor..... 471, 479
 window..... 355
 wood flooring..... 279
- Trim & rough-in Roman
 tub..... 354
- Trim enamel, latex satin... 492
- Trim pack wood paneling... 252
- Trim paint..... 492
- eggshell..... 492
 flat..... 494
- Trimmers..... 75
- Trimming, trench bottom... 40
- Trine..... 436
- Triple-track storm
 doors..... 204-205
- Troffer fluorescent
 fixtures..... 258
 parabolic..... 258
- U-lamp..... 258
- Trowel
 drywall..... 250
 outside corner..... 250
- Trowel finishing, concrete... 49
- Troweling machine, rental... 39
- Trowels
 margin notch..... 291
 notched..... 291
 pointing..... 291
- Tru-Glaze 4508 epoxy
 gloss coating..... 496
- Trusses
 fink..... 76
 gable..... 76
 roof..... 76
- T-square, drywall..... 250
- T-straps..... 513
- T-top roof exhaust vent... 145
- Tub
 laundry..... 336
 utility laundry, kit..... 336
- Tub & shower faucet
 single control..... 360
 single-handle..... 360
 single-knob..... 360
- Tub door
 bypass..... 355
 sliding..... 356
- Tub faucet..... 360-362
 lever handle..... 361
 single-knob..... 360
- Tub, bath, removal..... 352
- Tub, laundry
 hose..... 337
 overflow tube..... 337
- Tubular skylights..... 172
- Tuf-Tex spray texture..... 246
- Tumbled tile
 marble listello..... 300
 slate..... 300
 stone..... 300
- Tumbler & toothbrush
 holder..... 305
- Tung oil..... 491
- Turbine vent, roof..... 91, 146
- Turned spindle deck rail... 456
- Twinfast..... 249
- Two-gang box, Super
 Blue, non-metallic..... 422
- Two-handle lavatory
 faucet..... 372
- Type X gypsum board..... 243
- Tyvec suit..... 538
- Tyvek house wrap..... 88
- U**
 U.S. Ceramic
 Tile..... 299, 301-303
- UF compression connector
 non-metallic..... 419
- UF-B sheathed cable..... 419
- U-lamp troffer fluorescent
 fixture..... 258
- Ultra Silent bath fan..... 379
- Ultra Touch..... 87
- Ultra-Hide
 alkyd gloss enamel..... 493
 interior latex eggshell... 492
 interior latex paint..... 492
 interior paint..... 492
- Ultrasonic, Cleaning..... 530
- Undercoater interior
 enamel..... 491
- Undercounter refrigerator... 316
- Underground cable, UF-B
 sheathed..... 419
- Underground feeder
 compression connector,
 non-metallic..... 419
- Underlay, roof..... 88
- Underlayment..... 140, 283
 cement-based..... 285
 fast-setting patch..... 285
 foam..... 283-284
 laminate flooring..... 283-284
 liquid..... 285
 roof..... 134
 tile..... 295
 tile backerboard..... 295
- Underlayment & floor
 patch..... 286
- Underwater tile repair
 mortar..... 307
- Unfaced fiberglass batt
 insulation..... 84
- Universal hub bolt-on
 A type..... 438
- Urethane roof, spray
 foam..... 140
- Urethane sheathing..... 86
- Urinal flush valve, Sloan
 Royal..... 363
- Urinals, Dover..... 364
- USG..... 245, 254
- USG Interiors..... 257, 295
- Utilatub laundry tub..... 336
- Utility access door..... 248
- Utility bowl sink..... 337
- Utility cabinets
 birch..... 317
 finished..... 320
 maple..... 321
 oak..... 319, 321
 red oak..... 318
- Utility fan
 thru-the-wall..... 380
 vertical discharge..... 379
- Utility laundry tub kit..... 336
- Utility sink..... 337
- V**
 V siding, pine..... 108
- Vacuum, HEPA..... 540
- Valance, cabinet..... 316, 319
- Valley flashing
 aluminum..... 141
 roll..... 143
- Valspar..... 488, 491
- ValueTest exhaust fan..... 378
- ValueTest vertical
 discharge bath fan..... 379
- ValuSeries pointing
 trowel..... 291
- Valve lines..... 374
- Valves
 angle..... 364
 flush, Sloan Royal..... 363
 flush, urinal..... 363
 toilet, remove & replace... 352
 wall stop..... 364
- Vance Industries..... 334
- Vanguard hardwood
 flooring..... 280
- Vanity
 Arkansas..... 375
 Charleston..... 374
 Danville..... 375
 Kingston..... 374
 maple..... 375
 Monterey..... 375
 oak..... 374-375
 solid surface sink top.... 377
 Springfield..... 374
 Virginia..... 375
 with drawer..... 375
 with marble top..... 377-378
- Vanity cabinet..... 378
 mirrored with marble
 top..... 378
- Vanity mirror..... 382
- Vanity top
 granite..... 377
 Neptune shell marble.... 376
 Newport cultured
 marble..... 376
- oval bowl cultured
 marble..... 376-377
- rectangular cultured
 marble..... 376
- shell bowl cultured
 marble..... 376-377
- Vanity top and bowl
 cultured marble..... 377
- Vapor barrier..... 40, 81, 283
 blanket insulation..... 82
 paper..... 87
 perm rating..... 82
 vapor-resistant coating... 82
- Vapor retarder..... 92
- Varathane
 exterior classic clear.... 489
 exterior clear finish..... 489
 interior classic clear..... 489
 oil-based floor finish..... 489
- Varnish, marine..... 488
- Velux..... 172-173
- Veneer base board..... 245
- Veneer plaster..... 246
- Vent
 plumbing..... 389
 soffit..... 89

Vent channel, rafter bay 88	Vinyl flooring	Wall kit	Water
Vent kit, bath 382	removal..... 278	bathtub 354	blasting 115
Vent, roof	roll..... 286-287	tile..... 355	extraction 529
dormer..... 144	sheet..... 286-287	tub 354	Water Claw..... 531
ridge 144-145	transition reducer strip... 292	Wall lantern 443	Water closet
T-top exhaust 145	Vinyl flooring tools	Wall light, opal glass 441	flange, cast iron..... 364
turbine 146	roller, extendable..... 291	Wall louvers 91	toilet..... 362-363
waterproofing..... 130	Vinyl sheet flooring..... 287	Wall materials	Water damage
Vented range hood..... 343	Vinyl siding	ceiling tile..... 236	cleanup..... 524
Ventilation	mounting block 96	drywall 227	contaminated flood-
attic..... 83	trim pieces 96	gypsum wallboard 227	water..... 516
crawlspace 82	Vinyl tile	lath and plaster 227	dryout 515
roof 83	adhesive 290	wood paneling 235	restorative drying..... 515
Ventilator, bath 382	cutter..... 291	Wall oven..... 342	Water damage and mold
Ventilator retrofit, heat	Vinyl tile cutter..... 291	double..... 342	remediation..... 515
recovery..... 406	Vinyl tileboard molding ... 270	Wall paint..... 492	insurance coverage 515
Ventilators, power..... 92	Vinyl wall base	eggshell..... 492	(OSHA)..... 516
Venting skylights 173	dryback..... 292	latex..... 492	personal protective
Ventlite doors	self-stick..... 293	Wall plate	gear..... 516
fiberglass exterior..... 201	Vinyl-clad	coaxial cable..... 433	Water damage, dryout
steel exterior..... 199	wood awning windows ... 160	decorator phone 433	air movers..... 518
Vents	wood casement	single gang Decora..... 435	basement..... 520
attic..... 91	windows..... 160	single gang plastic..... 435	concrete block 520
cedar 90	wood windows..... 159	Wall registers,	dehumidifiers 518
continuous 89		installation 397	dessicants 518
dormer..... 90		Wall stop..... 364	electric system..... 521
eave..... 90		Wall surround kit	floor cover..... 520
foundation..... 88		bathtub 355	floors..... 520
gable..... 89-90		tub 355	gas and oil appliances... 521
louvered..... 90		Wall texture	hygrometer 518
redwood..... 90		Sand-Texture..... 493	insulation 519
ridge 90		Wall tile, ceramic 301, 303	paneling..... 520
roof turbine 91		Wallboard	plaster..... 519
screen..... 89		demolition 34, 316	stucco 519
soffit..... 89		L-trim..... 248	wallboard 519
under eave 89		mold resistant..... 243	wallcovering..... 520
VentSure ridge vent..... 144		painting..... 483-484	wood..... 519
Vermiculite insulation 87		primer 246	Water damage, dryout,
Vertical discharge bath		sander 250	structural drying
fan 379		texture spray..... 244	air movers 522
ValueTest 379		Wallboard stilts..... 250	ceilings 522
Vertical discharge utility		Wallcovering, designer	hardwood flooring..... 523
fan 379		panel..... 252	negative air scrubbers... 523
Vibrators, rental..... 39		Wall-mount lantern,	walls..... 522
Victorian base molding,		curved glass 443	Water dispenser 336
hardwood..... 259		Wall-mounted lavatory,	Water extraction 529-531
Victorian lavatory faucet... 373		removal..... 367	carpet 531
Viewer, door 214		Walls	hard surface 531
Villela faucet..... 370		adding..... 241	Water hammer..... 393
Vinyl		concrete..... 47	arrestor 407
bay windows..... 158		demolition 30	Water heaters 394
circular windows..... 159		painting..... 480-485	100-gallon commercial... 405
door bottom 196		partition, adding..... 270	Ariston 407
double-hung		removal..... 239	bracing..... 512
replacement windows... 157		setting with adhesive... 294	connection 512
fascia 108		setting with mortar..... 294	electric 406-407
garden windows 158		staining 485	electric, tankless..... 407
hopper windows 159		tile..... 294	FVIR 405
jalousie windows 159		Warming system	gas..... 405
patch..... 285		ceramic tile floor 305	gas fired..... 405
screen doors..... 203		thermostat 305	gas, tankless 407
siding 107		Wash down, manhours... 467	high altitude 405
siding removal 106		Washer kitchen sink	oil fired..... 405
siding repair..... 105		basket strainer..... 336	point-of-use 407
single-hung windows 158		Washer dryer wall	PowerStream..... 407
soffit..... 108		cabinets 319	power-vent..... 405
Vinyl composition		Washing	propane 405
tile..... 289-290		masonry..... 115	propane fired 405
Vinyl drywall outside		pressure 468	tall boy 405
corner bead 248		Washing, paint prep,	Water pipe, remove &
Vinyl floor tile..... 288-289		manhours 467	replace..... 408
Vinyl floor tile,		Waste disposal..... 29	Water pump..... 540
slip-retardant 289		Watco 488	Water resistant gypsum
			board 243

Water Seal waterproofer ... 490	Whirlpool bath	counterweighted 152	Wood coating, weather-resistant 488
Water shield 88	Cadet Elite 353	cut new opening 156	Wood conditioner 491
Water supply, low water pressure 393	Devonshire 354	double-hung 157, 163	Wood deck
Water surge shock absorber 407	Elite EZ-Install heater 354	egress window 172	patch built-up roofing 132
Water table 38	Portrait 354	energy-efficiency standards 148	staining 475
Water-based primer 493	Renaissance 353	escape wells 172	Wood doors
Water-based wood stain 488	Williamsburg Elite 353	fixed aluminum 162	entry 193
Waterblasting	Whirlpool tub apron 354	fixed octagonal 163	screen 203
manhours 468	White cement 114	garden 158	screen, installation 202
masonry 115	White Diamond bowling alley wax 491	glass setting labor 170	screen, remove & replace 202
Waterborne sanding sealer 489	White oak strip flooring 281	glazing putty replacement 150	Wood filler
Waterfall kitchen faucet 333	White wash pickling stain 488	grille sets, tilt sash 169	acrylic 281
Waterproof, concrete & masonry 495	Whole house fans 91	heat loss and gain 147	Wood finish 487
WaterSeal 490	Williamsburg lavatory faucet 372	humidity 159, 163	penetrating 487
Waterproofing	pedestal lavatory bowl 366	louvered, aluminum 163	Wood flooring 281
masonry walls 130	Roman tub filler 354	Low-E glass 147	adhesive 282
material 135	Wilsonart counters 322	measure & cut glass 170	hardwood 272
membrane 305	Wind clips 140	modern 147	installation tools 281
metal roof 135	Window	octagonal, wood 163	laminate 274
paint, elastomeric 494	demolition, wet 534	picture 162	plank 280
paper 88	drip cap 141	removal 35, 156	softwood 272
roof vent 130	framing 69	replacement 155, 157-158	strip 272
roof, remove & replace 130	screen 168	sash repair 151, 156	strips 279
roof, repair 129	straighten opening 514	sash springs 166	tile 282
sealer 495	Window bolt	sill, ceramic 301	touch-up 278
wood protector 490	double-hung 166	size, reducing 156	trim 279
Watertight conduit hub 430	Window glass, remove & replace 170	storm 149, 165	Wood paneling trim pack 252
Watts Radiant 305	Window grille systems 169	trim removal 156	Wood preservative 463, 490-491
Wave bath light fixture 441	Window guards 167	vinyl bay 158	copper 491
Wax	Window locks	vinyl double hung 157	Termin-8 490
bowling alley 491	flip lock 171	vinyl garden 158	Wood protector
paste 491	key, sliding 171	vinyl hopper 159	clear 490
Wax toilet bowl gasket 364	thumbscrew bar 171	vinyl single hung 158	waterproofing 490
Weather head 432	Window mullions 166	vinyl, custom 157	WaterSeal 490
PVC 422	Window openings	vinyl, replacement 157	Wood shingle, patch 137
Weatherproof blank cover, non-metallic 428	closure, masonry wall 156	vinyl-clad awning 160	Wood siding
Weatherproof conduit box 427	closure, wood frame 156	vinyl-clad casement 160	bevel 93
Weatherproof electrical box, 2 gang 427	cut new 156	vinyl-clad double-hung 159-160	board and batten 98
Weatherproof lampholder & cover 428	Window operators	vinyl-clad wood 159	bungalow 93
Weatherproofing 88	awning 166	weatherstripping 171	clapboard 93
Weather-resistant wood coating 488	jalousie 166	wood 147	decay 93
Weatherstripping	Window painting	wood, repair 149	horizontal 97
aluminum, adjustable 196	labor 486-487	wood, replacement 156	horizontal patterns 97
foam 196	Window roof covers, bay 164	Wire	lap 93
garage door 223	Window roofs 164-165	bell 433	moisture damage 93
magnetic 196	Window screens 160	screen 458	painting 93
vinyl, remove & replace 196	patch 168	speaker 433	repair 93
window seal sets 171	spline 168	thermostat cable 433	vertical 97
Weco 307	Window shutters 167	Type THHN copper 432	vertical patterns 97
Welded handy box 424	Window sill 165	UF cable 419	vertical tongue and groove 97
Welded square box 425	ceramic 301	Wire brush 50	Wood stain
Welded wire mesh 45	Window trim, bath wall 355	Wire mesh, welded 45	water-based 488
Western red cedar siding 108	Window wrap 141	Wireless door bell 436	Wood toilet seat 365
Westminster Ceramics 300	Windows	Wiring residences	Wood treatment 490
Wet location conduit box cover 428	adding or moving 153	adding outlets and switches 414	Wood window repair 149
Wet location receptacle cover, GFCI 428	aluminum 148	aluminum wiring 411	Wood-burning furnace 404
Wet patch roof cement 135	aluminum single hung 160-161	ground wire 413	Woodcore storm doors 205
rubber 135	aluminum sliding 161-162	knob and tube wiring 411	Wool carpet 308
Wet-Stick roof cement 135	aluminum, horizontal 161	low voltage wiring 414	Wrap
Wheel glass cutters 171	awning 160	non-metallic sheathed cable (Romex) 412	window 141
Wheel loader, rental 28, 39	awning, aluminum 162	smoke detectors 416	
Wheelbarrow 540	bay 158	Wonderboard tile backerboard 295	
	bay, angle 164	Wood	
	building codes 148	shakes 137	
	casement 160	shingles 137	
	casement bow 164	siding removal 106	
	casement, bay 158	Wood bleach kit 487	
	caulk 157		
	caulk removal 157		
	circular, vinyl 159		

X - Y - Z

X type gypsum board 243
Zinsser 490
ZPW clear wood preservative 491

Practical References for Builders

National Estimator Cloud



Generate professional construction estimates for all residential and commercial construction from your internet browser. Includes 10 Craftsman construction cost databases, over 40,000 labor and material costs for construction, in an easy-to-use format. Cost estimates are well-organized and thoroughly indexed to speed and simplify writing estimates for nearly any residential or light commercial construction project – new construction, improvement or repair. Convert the bid to an invoice – in either QuickBooks Desktop or QuickBooks Online. Access your estimates from anywhere and on any device with a Web browser. **Just \$9.49 a month.** Visit <http://craftsman-book.com/national-estimator-cloud> for more details.

Construction Contract Writer



Relying on a “one-size-fits-all” boilerplate construction contract to fit your jobs can be dangerous — almost as dangerous as a handshake agreement. *Construction Contract Writer* lets you draft a contract in minutes that precisely fits your needs and the particular job, and meets both state and federal requirements. You just answer a series of questions — like an interview — to construct a legal contract for each project you take on. Anticipate where disputes could arise and settle them in the contract before they happen. Include the warranty protection you intend, the payment schedule, and create subcontracts from the prime contract by just clicking a box. Includes a feedback button to an attorney on the Craftsman staff to help should you get stumped — **No extra charge. \$149.95.** Download the *Construction Contract Writer* at: <http://www.constructioncontractwriter.com>

Construction Forms for Contractors



This practical guide contains 78 useful forms, letters and checklists, guaranteed to help you streamline your office, manage your jobsites, gather and organize records and documents, keep a handle on your subs, reduce estimating errors, administer change orders and lien issues, monitor crew productivity, track your equipment use, and more. Includes accounting forms, change order forms, forms for customers, estimating forms, field work forms, HR forms, lien forms, office forms, bids and proposals, subcontracts, and more. All are also on the CD-ROM included, in Excel spreadsheets, as formatted Rich Text that you can fill out on your computer, and as PDFs. **360 pages, 8½ x 11, \$48.50** **eBook (PDF) also available; \$24.25 at www.craftsman-book.com**

CD Estimator

If your computer has Windows™ and a CD-ROM drive, CD Estimator puts at your fingertips over 150,000 construction costs for new construction, remodeling, renovation & insurance repair, home improvement, framing & finish carpentry, electrical, concrete & masonry, painting, earthwork & heavy equipment and plumbing & HVAC. Quarterly cost updates are available at no charge on the Internet. You'll also have the *National Estimator* program — a stand-alone estimating program for Windows™ that *Remodeling* magazine called a “computer wiz,” and *Job Cost Wizard*, a program that lets you export your estimates to *QuickBooks Pro* for actual job costing. A 60-minute interactive video teaches you how to use this CD-ROM to estimate construction costs. And to top it off, to help you create professional-looking estimates, the disk includes over 40 construction estimating and bidding forms in a format that's perfect for nearly any Windows™ word processing or spreadsheet program. **CD Estimator is \$149.50**

Home Inspection Handbook

Every area you need to check in a home inspection — especially in older homes. Twenty complete inspection checklists: building site, foundation and basement, structural, bathrooms, chimneys and flues, ceilings, interior & exterior finishes, electrical, plumbing, HVAC, insects, vermin and decay, and more. Also includes information on starting and running your own home inspection business. **324 pages, 5½ x 8½, \$29.95** **eBook (PDF) also available, \$14.98 at www.craftsman-book.com**

Craftsman eLibrary



Craftsman's eLibrary license gives you immediate access to 60+ PDF eBooks in our bookstore for 12 full months! **You pay only one low price. \$129.99.** Visit www.craftsman-book.com for more details.

National Appraisal Estimator

An Online Appraisal Estimating Service. Produce credible single-family residence appraisals — in as little as five minutes. A smart resource for appraisers using the cost approach. Reports consider all significant cost variables and both physical and functional depreciation.

Visit www.craftsman-book.com/national-appraisal-estimator-online-software for more information.

Cabinetmaking: From Design To Finish

Every aspect of cabinetmaking, from layout, through joinery, to finishing techniques. Gives illustrated instructions for designing cabinets to fit the kitchen workcenter; create dado, mortise, tenon, lap and dowel joints; make frames and panels; construct cabinets; and install cabinet hardware. **416 pages, 5½ x 8½, \$22.00**

National Painting Cost Estimator

A complete guide to estimating painting costs for just about any type of residential, commercial, or industrial painting, whether by brush, spray, or roller. Shows typical costs and bid prices for fast, medium, and slow work, including material costs per gallon, square feet covered per gallon, square feet covered per manhour, labor, material, overhead, and taxes per 100 square feet, and how much to add for profit. Includes a free download of an electronic version of the book, with *National Estimator*, a stand-alone Windows™ estimating program. Additional information and *National Estimator* ShowMe tutorial video is available on our website under the “Support” dropdown tab.

448 pages, 8½ x 11, \$98.00. Revised annually **eBook (PDF) also available; \$49.00 at www.craftsman-book.com**

National Construction Estimator

Current building costs for residential, commercial, and industrial construction. Estimated prices for every common building material. Provides manhours, recommended crew, and gives the labor cost for installation. Includes a free download of an electronic version of the book with *National Estimator*, a stand-alone Windows™ estimating program. Additional information and *National Estimator* ShowMe tutorial video is available on our website under the “Support” dropdown tab.

672 pages, 8½ x 11, \$97.50. Revised annually **eBook (PDF) also available; \$48.75 at www.craftsman-book.com**

Roofing Construction & Estimating

Installation, repair and estimating for nearly every type of roof covering available today in residential and commercial structures: asphalt shingles, roll roofing, wood shingles and shakes, clay tile, slate, metal, built-up, and elastomeric. Covers sheathing and underlayment techniques, as well as secrets for installing leakproof valleys. Many estimating tips help you minimize waste, as well as insure a profit on every job. Troubleshooting techniques help you identify the true source of most leaks. Over 300 large, clear illustrations help you find the answer to just about all your roofing questions. **448 pages, 8½ x 11, \$38.00**

eBook (PDF) also available, \$19.00 at www.craftsman-book.com

Insurance Replacement Estimator

Insurance underwriters demand detailed, accurate valuation data. There's no better authority on replacement cost for single-family homes than the *Insurance Replacement Estimator*. In minutes you get an insurance-to-value report showing the cost of re-construction based on your specification. You can generate and save unlimited reports. Visit www.craftsman-book.com/insurance-replacement-estimator-online-software for more details.

Profits in Buying & Renovating Homes

Step-by-step instructions for selecting, repairing, improving, and selling highly profitable “fixer-uppers.” Shows which price ranges offer the highest profit-to-investment ratios, which neighborhoods offer the best return, practical directions for repairs, and tips on dealing with buyers, sellers, and real estate agents. Shows you how to determine your profit before you buy, what “bargains” to avoid, and how to make simple, profitable, inexpensive upgrades. **304 pages, 8½ x 11, \$24.75**

Renovating & Restyling Older Homes


Any builder can turn a run-down old house into a showcase of perfection — if the customer has unlimited funds to spend. Unfortunately, most customers are on a tight budget. They usually want more improvements than they can afford — and they expect you to deliver. This book shows how to add economical improvements that can increase the property value by two, five or even ten times the cost of the remodel. Sound impossible? Here you'll find the secrets of a builder who has been putting these techniques to work on Victorian and Craftsman-style houses for twenty years. You'll see what to repair, what to replace and what to leave, so you can remodel or restyle older homes for the least amount of money and the greatest increase in value. **416 pages, 8½ x 11, \$33.50**

Craftsman's Construction Installation Encyclopedia

Step-by-step installation instructions for just about any residential construction, remodeling or repair task, arranged alphabetically, from *Acoustic tile* to *Wood flooring*. Includes hundreds of illustrations that show how to build, install, or remodel each part of the job, as well as manhour tables for each work item so you can estimate and bid with confidence. Also includes a CD-ROM with all the material in the book, handy look-up features, and the ability to capture and print out for your crew the instructions and diagrams for any job. **792 pages, 8½ x 11, \$65.00**

eBook (PDF) also available; \$32.50 at www.craftsman-book.com

National Electrical Estimator



This year's prices for installation of all common electrical work: conduit, wire, boxes, fixtures, switches, outlets, loadcenters, panelboards, raceway, duct, signal systems, and more. Provides material costs, manhours per unit, and total installed cost. Explains what you should know to estimate each part of an electrical system. Includes a free download of an electronic version of the book with *National Estimator*, a stand-alone *Windows™* estimating program. Additional information and *National Estimator ShowMe* tutorial video is available on our website under the "Support" dropdown tab.

552 pages, 8½ x 11, \$97.75. Revised annually

eBook (PDF) also available; \$48.88 at www.craftsman-book.com

Fences & Retaining Walls Revised eBook

Everything you need to know to run a profitable business in fence and retaining wall contracting. Takes you through layout and design, construction techniques for wood, masonry, and chain link fences, gates and entries, including finishing and electrical details. How to build retaining and rock walls. How to get your business off to the right start, keep the books, and estimate accurately. The book even includes a chapter on contractor's math. **400 pages.**

Available only as an eBook (PDF, EPUB & MOBI/Kindle); \$23.00 at www.craftsman-book.com

National Renovation & Insurance Repair Estimator

Current prices in dollars and cents for hard-to-find items needed on most insurance, repair, remodeling, and renovation jobs. All price items include labor, material, and equipment breakouts, plus special charts that tell you exactly how these costs are calculated. Includes a free download of an electronic version of the book with *National Estimator*, a stand-alone *Windows™* estimating program. Additional information and *National Estimator ShowMe* tutorial video is available on our website under the "Support" dropdown tab.

488 pages, 8½ x 11, \$99.50. Revised annually

eBook (PDF) also available; \$49.75 at www.craftsman-book.com

Plumber's Handbook Revised

This new edition explains simply and clearly, in non-technical, everyday language, how to install all components of a plumbing system to comply not only with recent changes in the International Plumbing Code and the Uniform Plumbing Code, but with the requirements of the Americans with Disabilities Act. Originally written for working plumbers to assure safe, reliable, code-compliant plumbing installations that pass inspection the first time, *Plumber's Handbook*, because of its readability, accuracy and clear, simple diagrams, has become the textbook of choice for numerous schools preparing plumbing students for the plumber's exams. Now, with a set of questions for each chapter, full explanations for the answers, and with a 200-question sample exam in the back, this handbook is one of the best tools available for preparing for almost any plumbing journeyman, master or state-required plumbing contracting exam.

384 pages, 8½ x 11, \$44.50

eBook (PDF) also available; \$22.25 at www.craftsman-book.com

Finish Carpenter's Manual

Everything you need to know to be a finish carpenter: assessing a job before you begin, and tricks of the trade from a master finish carpenter. Easy-to-follow instructions for installing doors and windows, ceiling treatments (including fancy beams, corbels, cornices and moldings), wall treatments (including wainscoting and sheet paneling), and the finishing touches of chair, picture, and plate rails. Specialized interior work includes cabinetry and built-ins, stair finish work, and closets. Also covers exterior trims and porches. Includes manhour tables for finish work, and hundreds of illustrations and photos. **208 pages, 8½ x 11, \$22.50**

National Repair & Remodeling Estimator

The complete pricing guide for dwelling reconstruction costs. Reliable, specific data you can apply on every repair and remodeling job. Up-to-date material costs and labor figures based on thousands of jobs across the country. Provides recommended crew sizes; average production rates; exact material, equipment, and labor costs; a total unit cost and a total price including overhead and profit. Separate listings for high- and low-volume builders, so prices shown are specific for any size business. Estimating tips specific to repair and remodeling work to make your bids complete, realistic, and profitable. Includes a free download of an electronic version of the book with *National Estimator*, a stand-alone *Windows™* estimating program. Additional information and *National Estimator ShowMe* tutorial video is available on our website under the "Support" dropdown tab.

528 pages, 8½ x 11, \$98.50. Revised annually

eBook (PDF) also available; \$49.25 at www.craftsman-book.com

Builder's Guide to Accounting Revised

Step-by-step, easy-to-follow guidelines for setting up and maintaining records for your building business. This practical guide to all accounting methods shows how to meet state and federal accounting requirements, explains the new depreciation rules, and describes how the Tax Reform Act can affect the way you keep records. Full of charts, diagrams, simple directions and examples to help you keep track of where your money is going. Recommended reading for many state contractor's exams. Each chapter ends with a set of test questions, and a CD-ROM included FREE has all the questions in interactive self-test software. Use the Study Mode to make studying for the exam much easier, and Exam Mode to practice your skills.

360 pages, 8½ x 11, \$43.00

eBook (PDF) also available; \$21.50 at www.craftsman-book.com

Painter's Handbook

Loaded with "how-to" information you'll use every day to get professional results on any job: the best way to prepare a surface for painting or repainting; selecting and using the right materials and tools (including airless spray); tips for repainting kitchens, bathrooms, cabinets, eaves and porches; how to match and blend colors; why coatings fail and what to do about it. Lists 30 profitable specialties in the painting business.

320 pages, 8½ x 11, \$33.00

Insurance Restoration Contracting: Startup to Success

Insurance restoration — the repair of buildings damaged by water, fire, smoke, storms, vandalism and other disasters — is an exciting field of construction that provides lucrative work that's immune to economic downturns. And, with insurance companies funding the repairs, your payment is virtually guaranteed. But this type of work requires special knowledge and equipment, and that's what you'll learn about in this book. It covers fire repairs and smoke damage, water losses and specialized drying methods, mold remediation, content restoration, even damage to mobile and manufactured homes. You'll also find information on equipment needs, training classes, estimating books and software, and how restoration leads to lucrative remodeling jobs. It covers all you need to know to start and succeed as the restoration contractor that both homeowners and insurance companies call on first for the best jobs.

640 pages, 8½ x 11, \$69.00

eBook (PDF) also available; \$34.50 at www.craftsman-book.com

How to Succeed With Your Own Construction Business

Everything you need to start your own construction business: setting up the paperwork, finding the jobs, advertising, using contracts, dealing with lenders, estimating, scheduling, finding and keeping good employees, keeping the books, and coping with success. If you're considering starting your own construction business, all the knowledge, tips, and blank forms you need are here. **336 pages, 8½ x 11, \$28.50**

eBook (PDF) also available; \$14.25 at www.craftsman-book.com

Home Building Mistakes & Fixes



This is an encyclopedia of practical fixes for real-world home building and repair problems. There's never an end to "surprises" when you're in the business of building and fixing homes, yet there's little published on how to deal with construction that went wrong - where out-of-square or non-standard or jerry-rigged turns what should be a simple job into a nightmare. This manual describes jaw-dropping building mistakes that actually occurred, from disastrous misunderstandings over property lines, through basement floors leveled with an out-of-level instrument, to a house collapse when a siding crew removed the old siding. You'll learn the pitfalls the painless way, and real-world working solutions for the problems every contractor finds in a home building or repair jobsite. Includes dozens of those "surprises" and the author's step-by-step, clearly illustrated tips, tricks and workarounds for dealing with them. **384 pages, 8½ x 11, \$52.50**

eBook (PDF) also available; \$26.25 at www.craftsman-book.com

National Plumbing & HVAC Estimator

Manhours, labor and material costs for all common plumbing and HVAC work in residential, commercial, and industrial buildings. You can quickly work up a reliable estimate based on the pipe, fittings and equipment required. Every plumbing and HVAC estimator can use the cost estimates in this practical manual. Sample estimating and bidding forms and contracts also included. Explains how to handle change orders, letters of intent, and warranties. Describes the right way to process submittals, deal with suppliers and subcontract specialty work. Includes a free download of an electronic version of the book with *National Estimator*, a stand-alone *Windows™* estimating program. Additional information and *National Estimator ShowMe* tutorial video is available on our website under the "Support" dropdown tab.

480 pages, 8½ x 11, \$98.25. Revised annually
eBook (PDF) also available; \$49.13 at www.craftsman-book.com

Writing contracts that comply with law in your state isn't easy. A contract that doesn't comply could leave you with no way to collect.

Construction Contract Writer has you covered. Download a trial today:

www.constructioncontractwriter.com

Craftsman Book Company
6058 Corte del Cedro
Carlsbad, CA 92011



Name _____

e-mail address (for order tracking and special offers) _____

Company _____

Address _____

City/State/Zip _____

☐ This is a residence

Total enclosed _____ (In California add 7.5% tax)

*Free Media Mail shipping, within the US,
when your check covers your order in full.*

10-Day Money Back Guarantee

- ☐ 43.00 Builder's Guide to Accounting Revised
- ☐ 149.50 CD Estimator
- ☐ 22.00 Cabinetmaking: From Design to Finish
- ☐ 48.50 Construction Forms for Contractors
- ☐ 65.00 Craftsman's Construction Installation Encyclopedia
- ☐ 22.50 Finish Carpenter's Manual
- ☐ 52.50 Home Building Mistakes & Fixes
- ☐ 29.95 Home Inspection Handbook
- ☐ 28.50 How to Succeed With Your Own Construction Business
- ☐ 69.00 Insurance Restoration Contracting: Startup to Success
- ☐ 52.50 Markup & Profit: A Contractor's Guide, Revised
- ☐ 97.50 National Construction Estimator w/FREE *Natl Estimator* Download

Basic Plumbing with Illustrations, Revised eBook

This completely-revised edition brings this comprehensive manual fully up-to-date with all the latest plumbing codes. It is the journeyman's and apprentice's guide to installing plumbing, piping, and fixtures in residential and light commercial buildings: how to select the right materials, lay out the job and do professional-quality plumbing work, use essential tools and materials, make repairs, maintain plumbing systems, install fixtures, and add to existing systems. Includes extensive study questions at the end of each chapter, and a section with all the correct answers. **384 pages**

Available only as an eBook (PDF) \$22.37 at www.craftsman-book.com

Markup & Profit: A Contractor's Guide, Revised

In order to succeed in a construction business, you have to be able to price your jobs to cover all labor, material and overhead expenses, and make a decent profit. But calculating markup is only part of the picture. If you're going to beat the odds and stay in business — profitably, you also need to know how to write good contracts, manage your crews, work with subcontractors and collect on your work. This book covers the business basics of running a construction company, whether you're a general or specialty contractor working in remodeling, new construction or commercial work. The principles outlined here apply to all construction-related businesses. You'll find tried and tested formulas to guarantee profits, with step-by-step instructions and easy-to-follow examples to help you learn how to operate your business successfully. Includes a link to free downloads of blank forms and checklists used in this book. **336 pages, 8½ x 11, \$52.50**

eBook (EPUB, MOBI for Kindle) also available; \$39.95 at www.craftsman-book.com



In A Hurry?

We accept phone orders charged to your

☐ Visa, ☐ MasterCard, ☐ Discover or ☐ American Express

Card# _____

Exp. date _____ CVV# _____ Initials _____

Tax Deductible: Treasury regulations make these references tax deductible when used in your work. Save the canceled check or charge card statement as your receipt.

Order online: www.craftsman-book.com
Free on the Internet! Download any of Craftsman's estimating databases for a 30-day free trial! www.craftsman-book.com/downloads

Prices subject to change without notice

- ☐ 97.75 National Electrical Estimator w/FREE *Natl Estimator* Download
- ☐ 98.00 National Painting Cost Estimator w/FREE *Natl Estimator* Download
- ☐ 98.25 National Plumbing & HVAC Estimator w/FREE *Natl Estimator* Download
- ☐ 99.50 National Renovation & Ins. Repair Est. w/FREE *Natl Estimator* Download
- ☐ 98.50 National Repair & Remodeling Est. w/FREE *Natl Estimator* Download
- ☐ 33.00 Painter's Handbook
- ☐ 44.50 Plumber's Handbook, Revised
- ☐ 24.75 Profits in Buying & Renovating Homes
- ☐ 33.50 Renovating & Restyling Older Homes
- ☐ 38.00 Roofing Construction & Estimating
- ☐ 98.75 National Home Improvement Estimator w/FREE *Natl Estimator* Download