



# 2023 NATIONAL PLUMBING & HVAC ESTIMATOR

**\$98.25**

**Edited by James A. Thomson**  
**31st Edition**

---



**The National  
Estimator Cloud**



This manual is also available as a Web app that makes it easy to compile and print estimates, bids and invoices for nearly any type of construction project. As owner of this manual, you're entitled to a substantial discount on a 10-month license to National Estimator Cloud. See details inside the back cover of the print edition of this manual.

Generate professional estimates from your internet browser. Includes 10 Craftsman cost databases. It's never been easier. No disk and no download needed!



**Craftsman Book Company**  
6058 Corte del Cedro, Carlsbad, CA 92011

## Acknowledgments

---

*The sample "Standard Form Subcontract" and "Subcontract Change Order" forms used in the final section of this book are reprinted with the permission of the publisher, the Associated General Contractors of America (National Office), 1957 E Street NW, Washington, District of Columbia 20006.*

**Looking for other construction reference manuals?**

Craftsman has the books to fill your needs. **Call toll-free 1-800-829-8123**

Visit our Web site: <http://www.craftsman-book.com>

Cover design by: *Jennifer Johnson*

Photos: *iStock by Getty Images™*

© 2022 Craftsman Book Company

ISBN 978-1-57218-386-5

Published September 2022 for the year 2023.

# Contents

<b>How to Use This Book</b> .....	<b>5</b>	Fire Protection Equipment.....	174
<b>Plumbing Equipment</b>		Fire Protection Sprinkler Pipe and Fittings (Roll Grooved).....	176
Domestic Hot Water Heaters .....	19	Fire Protection Branch Pipe & Fittings.....	180
Water Softeners .....	22	Fire Protection Sprinkler Pipe and Fittings (CPVC) .....	183
Kitchen Equipment .....	25	<b>HVAC Equipment</b>	
Kitchen Equipment Connections .....	26	Commercial Boilers .....	185
Plumbing Fixtures .....	27	Commercial Boiler Connections.....	190
Plumbing Fixture Rough-In .....	31	Commercial Boiler Components and Accessories.....	192
<b>Piping Systems</b>		Centrifugal Pumps and Pump Connections .....	206
Copper Pipe, Type K with Brazed Joints .....	33	Heat Exchangers and Connections .....	207
Copper Pipe, Type K with Soft-Soldered Joints....	43	Fan Coil Units and Connections .....	208
Copper Pipe, Type L with Brazed Joints.....	53	Reheat Coils and Connections .....	209
Copper Pipe, Type L with Soft-Soldered Joints....	61	Unit Heaters and Connections .....	210
Copper Pipe, Type M with Brazed Joints.....	70	Chillers and Chiller Connections.....	211
Copper Pipe, Type M with Soft-Soldered Joints....	78	Condensing Units and Cooling Towers.....	212
Copper, Pressfit .....	86	Cooling Towers and Cooling Tower Connections .....	213
Copper Pipe, Type K & L with Roll Grooved Joints .....	89	<b>Steel Piping Systems</b>	
PVC, Schedule 40, with Solvent-Weld Joints .....	91	Carbon Steel, Schedule 40 with 150# Fittings & Butt-Welded Joints.....	214
PVC, Schedule 80, with Solvent-Weld Joints .....	101	Carbon Steel, Schedule 40 with 150# M.I. Fittings & Threaded Joints .....	223
Polyethylene-Aluminum Pipe with Crimped Joints.....	111	Carbon Steel, Schedule 5 with Pressfit Fittings.....	234
Polyethylene-Aluminum Pipe with Compression Joints .....	116	Carbon Steel, Schedule 80 with 300# Fittings & Butt-Welded Joints.....	237
Plumbing and Piping Specialties.....	119	Carbon Steel, Schedule 80 with 300# M.I. Fittings & Threaded Joints .....	247
Cast Iron, DWV, Service Weight, No-Hub with Coupled Joints.....	135	Carbon Steel, Schedule 160 with 3,000-6,000# Fittings .....	255
Cast Iron, DWV, Service Weight, Hub & Spigot with Gasketed Joints .....	141	Carbon Steel, Schedule 40 with Roll-Grooved Joints.....	266
Copper, DWV, with Soft-Soldered Joints.....	146	Carbon Steel, Schedule 10 with Roll-Grooved Joints.....	273
ABS, DWV with Solvent-Weld Joints .....	150	Carbon Steel, Schedule 40 with Cut-Grooved Joints .....	280
PVC, DWV with Solvent-Weld Joints .....	154	<b>Residential HVAC Assemblies</b> .....	<b>286</b>
PVC, DWV with Gasketed Bell and Spigot Joints.....	159	<b>Air Handling Unit Accessories</b> .....	<b>290</b>
Polypropylene, Schedule 40, with Heat-Fused Joints.....	164		
<b>Floor, Area, Roof and Planter Drains</b> .....	<b>168</b>		
<b>Cleanouts</b> .....	<b>169</b>		
<b>Fire Protection</b>			
Fire Protection Sprinklers.....	170		

<b>Heat Recovery Ventilators - Commercial</b> .....	<b>291</b>	<b>Fiberglass Pipe Insulation</b> .....	<b>397</b>
<b>Heat Recovery Ventilators - Residential</b> .....	<b>292</b>	<b>Calcium Silicate Pipe Insulation with</b>	
<b>Water Coil Piping</b> .....	<b>294</b>	<b>Aluminum Jacket</b> .....	<b>399</b>
<b>Air Handling Unit Coil Connections</b> .....	<b>297</b>	<b>Closed Cell Elastomeric Pipe Insulation</b> .....	<b>400</b>
<b>Gas-Fired Furnaces</b> .....	<b>299</b>	<b>Thermal Duct Insulation</b> .....	<b>401</b>
<b>Energy Recovery Systems, Enthalpy</b> .....	<b>301</b>	<b>Balancing of HVAC Systems</b> .....	<b>402</b>
<b>Unit Heaters</b> .....	<b>302</b>	<b>Temperature Controls</b> .....	<b>405</b>
<b>Infrared Heaters</b> .....	<b>304</b>		
<b>Heat Pump Systems</b> .....	<b>305</b>	<b>Ductile Iron Pipe Systems</b>	
<b>Water Pump Systems</b> .....	<b>313</b>	Ductile Iron, Class 153, Cement-Lined with	
<b>Geothermal/Domestic Water Wells</b> .....	<b>316</b>	Mechanical Joints.....	<b>407</b>
<b>Biomass-Fired Boilers</b> .....	<b>319</b>	Ductile Iron, Class 153, Double Cement-Lined	
<b>Fans and Blowers</b> .....	<b>324</b>	with Mechanical Joints.....	<b>409</b>
<b>Ventilators &amp; Residential Exhaust Fans</b> .....	<b>326</b>	Ductile Iron, Class 110, Cement-Lined with	
<b>Apparatus Housing</b> .....	<b>331</b>	Mechanical Joints.....	<b>411</b>
<b>Air Devices, Registers &amp; Grilles</b> .....	<b>333</b>	<b>Cast Iron, Class 150 with Mechanical Joints</b> ....	<b>412</b>
<b>Air Devices, Diffusers &amp; Grilles</b> .....	<b>334</b>	<b>Asbestos-Cement, Class 2400 or 3000 with</b>	
<b>Terminal Units (VAV)</b> .....	<b>337</b>	<b>Mechanical Joints</b> .....	<b>413</b>
		<b>Fiberglass Tanks</b> .....	<b>415</b>
<b>Ducting Systems</b>		<b>Plastic Tanks</b> .....	<b>416</b>
Ductwork Specialties.....	<b>339</b>	<b>Trenching</b> .....	<b>418</b>
Galvanized Steel Ductwork.....	<b>344</b>	<b>Equipment Rental</b> .....	<b>420</b>
Installed Ductwork Per Pound.....	<b>346</b>	<b>Close-Out Items</b> .....	<b>421</b>
Galvanized Steel Spiral Ductwork.....	<b>348</b>	<b>HVAC &amp; Plumbing Demolition</b> .....	<b>422</b>
Galvanized Steel Round Spiral Fittings.....	<b>349</b>	<b>Budget Estimating</b> .....	<b>435</b>
Galvanized Steel Rectangular Ductwork .....	<b>351</b>		
Galvanized Steel Rectangular		<b>Forms and Letters</b>	
90 Degree Elbows.....	<b>353</b>	Change Estimates.....	<b>438</b>
Galvanized Steel Spiral Duct.....	<b>356</b>	Subcontract Forms.....	<b>447</b>
Galvanized Steel Spiral Duct Fittings.....	<b>358</b>	Purchase Orders .....	<b>451</b>
Galvanized Steel Spiral Tees.....	<b>360</b>	Construction Schedules .....	<b>453</b>
Galvanized Steel Spiral Crosses .....	<b>366</b>	Letter of Intent.....	<b>456</b>
Galvanized Steel Rectangular Ductwork .....	<b>369</b>	Submittal Data.....	<b>458</b>
Galvanized Steel Rectangular Elbows.....	<b>381</b>	Billing Breakdown Worksheet .....	<b>461</b>
Galvanized Steel Drops and Tees .....	<b>391</b>		
Galvanized Steel Round Ductwork .....	<b>394</b>	<b>Index</b> .....	<b>463</b>
Fiberglass Ductwork.....	<b>395</b>		

# How to Use This Book

This 2023 National Plumbing & HVAC Estimator is a guide to estimating labor and material costs for plumbing, heating, ventilating and air conditioning systems in residential, commercial and industrial buildings.

This manual is also available by subscription on the Web as part of National Estimator Cloud. For only a few dollars a month, you get all ten of Craftsman's 2023 construction cost estimating guides. Each has about 400 pages of current labor and material costs for construction – all neatly organized and indexed. Use these costs to build estimates, bids and invoices for nearly any type of project.

National Estimator Cloud:

- Prints estimates, bids and invoices as Word, Excel or Postscript documents.
- Supports progress billing. National Estimator remembers what work has been billed and what hasn't.
- Runs as a secure app on the Web so you can write estimates anywhere you have a Web connection.
- Exports invoices to QuickBooks, either desktop or online.
- Bids and invoices can show as much or as little detail as you want.
- Material costs are updated regularly as prices change.
- Costs only a few dollars a month. Cancel any time you want.

As the owner of this manual, you're entitled to a substantial discount on a 10- month license to National Estimator Cloud. Details are inside the back cover of this manual.

**Costs in This Manual** will apply within a few percent on a wide variety of projects. Using the information given on the pages that follow will explain how to use these costs and suggest procedures to follow when compiling estimates. Reading the remainder of this section will help you produce more reliable estimates for plumbing and HVAC work.



**Manhour Estimates in This Book** will be accurate for some jobs and inaccurate for others. No manhour estimate fits all jobs because every construction project is unique. Expect installation times to vary widely from job to job, from crew to crew, and even for the same crew from day to day.

There's no way to eliminate all errors when making manhour estimates. But you can minimize the risk of a major error by:

1. Understanding what's included in the manhour estimates in this book, and
2. Adjusting the manhour estimates in this book for unusual job conditions.

**The Craft@Hrs Column.** Manhour estimates in this book are listed in the column headed *Craft@Hrs*. For example, on page 19 you'll see an estimate for installing a 6 gallon hot water heater. In the *Craft@Hrs* column opposite 6 gallon you'll see:

P1@.500

To the left of the @ symbol you see an abbreviation for the recommended work crew.

Page 7 shows the wage rates and craft codes used in this book.

To the right of the @ symbol you see a number. The number is the estimated manhours (not crew hours) required to install each unit of material listed. In the case of a 6 gallon hot water heater, P1@.500 means that .500 manhours are required to install 1 hot water heater.



**Costs in the Labor \$ Column** are based on manhour estimates in the *Craft@Hrs* column. Multiply the manhour estimate by the assumed hourly labor cost to find the installation cost in the *Labor \$* column. For example, .500 manhours times \$39.03 (the average wage for crew P1) is \$19.52.

**Manhour Estimates** include all productive labor normally associated with installing the materials described. These estimates assume normal conditions: experienced craftsmen working on reasonably well planned and managed new construction with fair to good productivity. Labor estimates also assume that materials are standard grade, appropriate tools are on hand, work done by other crafts is adequate, layout and installation are relatively uncomplicated, and working conditions don't slow progress.

All manhour estimates include tasks such as:

- Unloading and storing construction materials, tools and equipment on site.
- Working no more than two floors above or below ground level.

**National Plumbing & HVAC Estimator**

- Working no more than 10 feet above an uncluttered floor.
- Normal time lost due to work breaks.
- Moving tools and equipment from a storage area or truck not more than 200 feet from the work area.
- Returning tools and equipment to the storage area or truck at the end of the day.
- Planning and discussing the work to be performed.
- Normal handling, measuring, cutting and fitting.
- Regular cleanup of construction debris.
- Infrequent correction or repairs required because of faulty installation.

If the work you're estimating won't be done under these conditions, you need to apply a correction factor to adjust the manhour estimates in this book to fit your job.

**Applying Correction Factors.** Analyze your job carefully to determine whether a labor correction factor is needed. Failure to consider job conditions is probably the most common reason for inaccurate estimates.

Use one or more of the recommended correction factors in Table 1 to adjust for unusual job conditions. To make the adjustment, multiply the manhour estimate by the appropriate conversion factor. On some jobs, several correction factors may be needed. A correction factor less than 1.00 means that favorable working conditions will reduce the manhours required.



**Supervision Expense** to the installing contractor is not included in the labor cost. The cost of supervision and non-productive labor varies widely from job to job. Calculate the cost of supervision and non-productive labor and add this to the estimate.

**Hourly Labor Costs** also vary from job to job. This book assumes an average manhour labor cost of \$46.09 for plumbers and \$44.66 for sheet metal workers. If these hourly labor costs are not accurate for your jobs, adjust the labor costs up or down by an appropriate percentage. Instructions on the next page explain how to make these adjustments. If you're using National Estimator Cloud, it's easy to set your own wage rates.

Hourly labor costs in this book include the basic wage, fringe benefits, the employer's contribution to welfare, pension, vacation and apprentice funds, and all tax and insurance charges based on wages. Table 2 at the top of the next page shows how hourly labor

<b>Condition</b>	<b>Correction Factor</b>
Work in large open areas, no partitions	.85
Prefabrication under ideal conditions, bench work	.90
Large quantities of repetitive work	.90
Very capable tradesmen	.95
Work 300' from storage area	1.03
Work 400' from storage area	1.05
Work 500' from storage area	1.07
Work on 3rd through 5th floors	1.05
Work on 6th through 9th floors	1.10
Work on 10th through 13th floors	1.15
Work on 14th through 17th floors	1.20
Work on 18th through 21st floors	1.25
Work over 21 floors	1.35
Work in cramped shafts	1.30
Work in commercial kitchens	1.10
Work above a sloped floor	1.25
Work in attic space	1.50
Work in crawl space	1.20
Work in a congested equipment room	1.20
Work 15' above floor level	1.10
Work 20' above floor level	1.20
Work 25' above floor level	1.30
Work 30' above floor level	1.40
Work 35' to 40' above floor level	1.50

**Table 1 Recommended Correction Factors**

costs in this book were calculated. It's important that you understand what's included in the figures in each of the six columns in Table 2. Here's an explanation:

**Column 1**, the base wage per hour, is the craftsman's hourly wage. These figures are representative of what many contractors are paying plumbers, sheet metal workers and helpers in 2023.

**Column 2**, taxable fringe benefits, includes vacation pay, sick leave and other taxable benefits. These fringe benefits average about 5.61% of the base wage for many plumbing and HVAC contractors. This benefit is in addition to the base wage.

**Column 3**, insurance and employer-paid taxes in percent, shows the insurance and tax rate for the craft workers. The cost of insurance in this column includes workers' compensation and contractor's casualty and liability coverage. Insurance rates vary





Column Number	1	2	3	4	5	6
	Base wage per hour	Taxable fringe benefits (at 5.61% of base wage)	Insurance and employer taxes (%)	Insurance and employer taxes (\$)	Non-taxable fringe benefits (at 4.96% of base wage)	Total hourly cost used in this book
Craft						
Laborer	22.31	1.25	30.97%	7.30	1.11	31.97
Plumber	34.02	1.91	23.57%	8.47	1.69	46.09
Sheet Metal Worker	32.61	1.83	24.97%	8.60	1.62	44.66
Operating Engineer	33.18	1.86	24.19%	8.48	1.64	45.16
Sprinkler Fitter	33.43	1.88	24.22%	8.55	1.66	45.52
Electrician	32.89	1.85	19.34%	6.72	1.63	43.09
Cement Mason	28.04	1.57	22.46%	6.65	1.39	37.65

Craft Code	Crew Composition	Average Hourly Cost per Manhour
ER	4 building plumbers, 2 building laborers, 1 operating engineer	41.92
SN	4 building sheet metal workers, 2 building laborers, 1 operating engineer	41.11
P1	1 building plumber and 1 building laborer	39.03
ST	1 sprinkler fitter	45.52
SK	4 sprinkler fitters, 2 building laborers, 1 operating engineer	41.60
SL	1 sprinkler fitter and 1 laborer	38.75
S2	1 building sheet metal worker, 1 building laborer	38.32
BE	1 electrician	43.09
CF	1 cement mason	37.65
SW	1 sheet metal worker	44.66

**Table 2 Labor Costs Used in This Book**

widely from state to state and depend on a contractor's loss experience. Note that taxes and insurance increase the hourly labor cost by approximately 30%. There is no legal way to avoid these costs.

**Column 4**, insurance and employer taxes in dollars, shows the hourly cost of taxes and insurance. Insurance and taxes are paid on the costs in both columns 1 and 2.

**Column 5**, non-taxable fringe benefits, includes employer paid non-taxable benefits such as medical coverage and tax-deferred pension and profit sharing plans. These fringe benefits average 4.96% of the base wage for many plumbing and HVAC contractors. The employer pays no taxes or insurance on these benefits.

**Column 6**, the total hourly cost in dollars, is the sum of columns 1, 2, 4, and 5. The labor costs in Column 6 were used to compute costs in the Labor \$ column of this book.

**Adjusting Costs in the Labor \$ Column.** The hourly labor costs used in this book may apply within a few percent on many of your jobs. But wage rates may be much higher or lower in some areas. If the hourly costs shown in Column 6 of Table 2 are not accurate for your work, adjust labor costs to fit your jobs.

For example, suppose your hourly labor costs are as follows:

Plumber	\$29.00
Laborer	\$19.00
Total hourly crew cost	\$48.00

Your average cost per manhour would be \$24.00 (\$48.00 per crew hour divided by 2 because this is a crew of two).

A labor cost of \$24.00 is about 61% of the \$39.03 labor cost used for crew P1. Multiply costs in the Labor \$ column by .615 to find your estimated cost.

Adjusting the labor costs in this book will make your estimates much more accurate. Making adjustments to labor costs is both quick and easy if you use National Estimator Cloud.

**Equipment Cost** will vary according to need and application. It is typically \$36.00 per day for a 2-ton chain hoist.

**Material Costs** in this manual are intended to reflect what medium- to low-volume contractors will be paying in 2023 after applying normal discounts. These costs include charges for delivery to within 25 to 30 miles of the supplier.

## National Plumbing & HVAC Estimator

**Overhead and Profit** for the installing contractor are not included in the costs in this manual unless specifically identified in the text. Markup can vary widely with local economic conditions, competition and the installing contractor's operating expenses. Add the markup that's appropriate for your company, the job and the competitive environment.

**How Accurate Are These Figures?** As accurate as possible considering that the editors don't know your material suppliers, haven't seen the plans or specifications, don't know what building code applies or where the job is, had to project material costs at least six months into the future, and had no record of how much work the crew that will be assigned to the job can handle.

You wouldn't bid a job under those conditions. And I don't claim that all plumbing and HVAC work is done at these prices.

**Estimating Is an Art**, not a science. There is no one price that applies on all jobs. On many jobs the range between high and low bid will be 10% or more. There's room for legitimate disagreement on what the correct costs are, even when complete plans and specifications are available, the date and site are established, and labor and material costs are identical for all bidders.

No estimate fits all jobs. Good estimates are custom made for a particular project and a single contractor through judgment, analysis and experience. This book is not intended as a substitute for judgment, analysis and sound estimating practice. It's an aid in developing an informed opinion of cost, not an answer book.

### **Additional Costs to Consider**

---

Here's a checklist of additional costs to consider before submitting any bid.

1. Sales taxes
2. Mobilization costs
3. Payment and performance bond costs
4. Permits and fees
5. Storage container rental costs
6. Utility costs
7. Tool costs
8. Callback costs during warranty period
9. Demobilization costs

### **Exclusions and Clarifications**

---

Neither the job specifications nor the contract may identify exactly what work should be included in the plumbing and HVAC bid. Obviously, you have to identify what work is included in the job.

The most efficient way to define the scope of the work is to prepare a list of tasks not normally performed by your company and attach that list to each bid submitted. Here's a good list of work that should be excluded from your bid.

#### **Your Bid Should Exclude**

- Final cleaning of plumbing fixtures
- Backings for plumbing fixtures
- Toilet room accessories
- Electrical work, including motor starters
- Electrical wiring and conduit over 100 volts
- Temporary utilities
- Painting, priming and surface preparation
- Structural cutting, patching or repairing
- Fire protection and landscape sprinklers
- Equipment supports
- Surveying and layout of control lines
- Removal or stockpiling of excess soil
- Concrete work, including forming and rebar
- Setting of equipment furnished by others
- Equipment, unless shown, and personnel hoisting
- Wall and floor blockouts
- Pitch pockets
- The costs of performance or payment bonds
- Site utilities
- Asbestos removal or disposal
- Contaminated soil removal or disposal
- Major increases in copper material prices
- Fire dampers not shown on the plans

#### **Your Bid Should Include**

- Trash sweep-up only. Others haul it away
- Site utilities from building to property line only
- Piping to 5 feet outside the building only
- Plumbing & HVAC permits for your work only



## **Beware of Price Changes**

---

There's no way to be sure what prices will be in three to six months. All labor, equipment, material and subcontract prices in a bid should be based on costs anticipated when the project is expected to be built, not when the estimate is compiled. That presents a problem. Except for the installation of underground utilities, most plumbing and HVAC work is done six months to a year after the bid is submitted. When possible, get price protection in writing from your suppliers and subcontractors. If your suppliers and subs won't guarantee prices, include an escalation allowance in your bid to cover anticipated price increases.

## **Material Pricing Conditions**

---

All equipment and material prices quoted by your vendors will be conditional. They usually don't include sales tax and are subject to specific payment and shipping terms. Every estimator should understand the meaning of common shipping terms. They define who pays the freight and who has responsibility for processing freight-damage claims. Here's a summary of important conditions you should understand.

**F.O.B. Factory** (Free On Board at the Factory): Title passes to the buyer when the goods are delivered by the seller to the freight carrier. The buyer pays the freight and is responsible for freight-damage claims.

**F.O.B. Factory F.F.A.** (Free On Board at the Factory, Full Freight Allowed): The title passes to the buyer when the goods are delivered by the seller to the freight carrier. The seller pays the freight charges, but the buyer is responsible for freight-damage claims.

**F.O.B. (city of destination)** (Free On Board to your city): The title passes to the buyer when the goods are delivered by the seller to the freight terminal in the city, or nearest city, of destination. The seller pays the freight and is responsible for freight-damage claims to the terminal. The buyer pays the freight charge and is responsible for freight-damage claims from the terminal to the final destination.

**F.O.B. Job Site** (Free On Board at job site, or contractor's shop): The title passes to the buyer when the goods are delivered to the job site (or shop). The seller pays the freight and is responsible for freight-damage claims.

**F.A.S. Port** [of a specific city] (Free Alongside Ship at the nearest port): The title passes to the buyer when goods are delivered to the ship dock or port terminal. The seller pays the freight and is responsible for

freight-damage claims to the ship dock or port terminal only. The buyer pays the freight and is responsible for freight-damage claims from the ship dock or port terminal to the designated delivery point.

Obviously, it's to your advantage to instruct all vendors to quote costs F.O.B. the job site or your shop.

## **Reducing Costs**

---

Most construction specifications allow the use of alternative equipment and materials. It's the estimator's responsibility to select the most cost-effective products. Research and compare your costs before making any decisions. Avoid selecting any material or equipment simply because that's what you've always done.

Don't recommend plastic products such as ABS, PVC, or polypropylene pipe or corrugated flexible ducts until you've checked local code requirements. Most building codes prohibit use of these materials inside public buildings such as schools, care centers and hospitals.

It's wise to select 100% factory-packaged equipment. Beware of equipment labeled "Some assembly required." Field labor costs for mounting loose coils, motors and similar equipment are very high.

## **Value Engineering**

---

Let's suppose you've submitted a combined plumbing and HVAC bid for \$233,000. Your cutthroat competitor put in a bid at \$4,000 less, \$229,000. Obviously there's no way you're going to get the job. Right?

Not so fast! Maybe value engineering can help you win that contract — while fattening your profit margin.

Suppose the proposal you submitted had two parts. Part I is the bid for \$233,000, based entirely on job plans and specs, just the way they were written. But appended to your proposal is Part II, a list of suggestions for saving money without sacrificing any of the capacity or quality designed into the system. Here's an example of what might be in Part II:

1. Deduct for providing pipe hanger spacings per UPC in lieu of specified spacings: \$1,750.00
2. Deduct for reducing heating hot water pipe sizes by using 40 degrees F Delta T in lieu of specified 20 degrees F Delta T: \$4,600.00
3. Deduct for providing pressure/temperature taps at air handling units, pumps and chillers in lieu of specified thermometers and pressure gauges: \$875.00

## National Plumbing & HVAC Estimator

- |  |            |
|--|------------|
| 4. Deduct for eliminating water treatment in closed piping systems:  | \$1,800.00 |
| 5. Deduct for piping chilled and heating hot water pumps in parallel in lieu of providing 100% stand-by pumps: | \$2,900.00 |

**Total deductions: \$11,925.00**

Adopting these suggestions would make you low bidder by nearly \$8,000. A saving like that will be tempting to most owners, especially if the owner understands that your suggestions result in a system that is every bit as good and maybe better than the system as originally designed.

You're not offering to undercut the competition. Far from it. You're using knowledge and experience to create better value for the owner. That's called value engineering and it's likely to win the respect of nearly all cost-conscious owners.

Notice that reducing costs is only part of what value engineering is all about. You don't cut costs at the expense of system quality, integrity, capacity or performance.

Don't waste your time, and your client's, by offering to substitute cheaper or lower-quality fixtures or equipment. Any cutthroat contractor with a price list can do that. Recommend the use of inferior materials and you'll be associated with the inferior goods you promote. Some owners consider even the suggestion to be insulting.

The recommendations you make (like most of those in the example) will require design changes. You can expect to be examined (or even challenged) on these points. Be ready to explain and defend each of your suggestions. Convince the client (or the design engineer) that your ideas are based on sound engineering principles and you're well on the way to winning the owner's confidence and the contract.

Now, let's go back to the list and see how we might justify the five value engineering recommendations.

**1. Pipe Hanger Spacing.** The pipe hanger spacings recommended in the Uniform Plumbing Code (UPC) are calculated by experienced, professional structural engineers. The safety factors used in these calculations are very conservative. They've been widely used for many years and have proved to be more than adequate. There's no need for more hangers than the UPC requires.

**2. Changing HHW Delta T.** In hydronic heating systems, heat measured in Btus is pumped to terminal units. The proposed change of the Delta T, from 20 degrees F to 40 degrees F, has no effect whatsoever on how many Btus the system delivers. You're not changing anything but the volume of water being pumped. At lower volume levels, the size of the pump, the pipe and the pipe insulation can all be reduced. Not one of these changes will affect the system's ability to transmit heat. Furthermore, operating costs will also drop, since less pump horsepower will be needed to run the smaller pump.

**3. Thermometers/Pressure Gauges.** Thermometers and pressure gauges installed on or near vibrating machinery have a very short life expectancy. Gauges quickly lose accuracy under harsh conditions. Readings will become less and less reliable. That's potentially dangerous. You can avoid this problem by using insertion-type pressure/temperature taps instead. Store these sensitive gauges in a desk drawer or a tool crib when not in use. Safely stored, they're protected from damage. They'll give accurate readings longer and won't need to be replaced as often. And they're simple to use. Just insert a gauge in one of the conveniently located taps. Make the reading, then remove the gauge and put it away.

**4. Water Treatment.** ITT Bell & Gossett has done studies on corrosion in closed hydronic systems that have a make-up water rate of no more than 5% per year. These studies show that corrosion virtually stops when entrained air is either removed or depleted. No water treatment is needed in this closed system.

**5. 100% Standby Pumps.** Two pumps piped and operated in parallel are more economical. Even if one pump fails, the other pump can maintain delivery at 75 to 80% of the designed flow rate. That's usually adequate for emergency operation.

These cost-saving ideas are small, but could tip the balance in your favor. I hope they demonstrate the potential that value engineering has when bidding jobs. Any time you're compiling an estimate, keep an eye out for ways to save money or reduce the owner's cost. Jot a note to yourself about each potential saving you identify. Before submitting the bid, make a list of your alternate suggestions. Maybe best of all, markup on your value engineering suggestions can be higher than your normal markup. If value engineering can cut costs by \$10,000, maybe as much as \$4,000 of that should end up in your pocket!

## Value Engineering: Surplus Materials

Value engineering doesn't begin and end with job plans and specs. Value engineering means getting the most value at the least cost, no matter whether it's value to the owner or value to the contractor. Smart mechanical contractors learn to build extra value into their jobs by controlling shrinkage of materials. Nearly every significant plumbing and HVAC job ends with at least some surplus material on hand. Material left over when the job is done tends to be discarded as waste or hauled off the job in the back of a truck that doesn't have your company name on the door. And why not? It's surplus — not needed. The owner didn't need it. So now it's up for grabs.

Not quite. Let's consider who actually owns that surplus material. When your company has been paid, every piece of material your crew installed belongs to the building owner. But what about those fittings, hangers and valves delivered to the job site but never actually used? Almost certainly, those materials were included in your bid. So aren't they the property of the owner? Not in my opinion. The owner contracted for a mechanical system and (presumably) has one. Unless it's a cost-plus job or a labor-only job, the owner didn't buy materials delivered to the job site. The owner bought a mechanical system and has one — completely separate and apart from any surplus materials. In my mind, the property owner has no more claim to left-over materials than the same owner would have claim to labor hours not expended or equipment not used on the same job.

Unless there's some provision in your contract to the contrary, surplus material belongs to the installing contractor. But your right to that material and the chance of actually getting it back to your shop are two very different propositions. I see recovery of surplus material as a training issue. As a matter of company policy, make it clear to your crews that surplus material belongs to your company. The supervisor on every job should be accountable for recovery of excess material. Every significant job will have at least some surplus. Accounting for that surplus should be part of your routine close-out procedure. Fortunately, it's not difficult. I'll explain.

Control of surplus materials begins with a good checklist, or form. I recommend the Materials, Equipment and Tool form, "MET" for short. A blank MET form appears following this section. Your MET should show both what's delivered to the job site (material, equipment and tools) and surplus "drops" returned to your shop at project close-out. A MET

ensures that the estimator, the shop inventory manager and your field supervisor are on the same page. Your MET establishes accountability. Nothing falls through the cracks. Job input equals job output plus returns. Everything delivered to the job and not expended should be returned to your shop.

Here's how it works:

1. Based on the estimate that won you the job, the items needed are purchased for the job and staged for delivery to the job site.
2. As materials, equipment and tools are delivered to the job site, your supervisor completes the first three columns of the MET form: Description, Quantity and Date.
3. As work is completed, the same supervisor completes the four columns under Returned to Inventory: Quantity Returned, Date, Status Code and Value. The status code will be either "RS" (Returned and Salvaged) or "RN" (Returned New).
4. Back at your shop, both RS and RN materials should be restored to inventory.
5. If your company has an inventory manager, have that manager assign the return value to each item returned. If you're using QuickBooks Pro, the "Adjust Inventory" feature can handle this task quite easily. Add two new categories under "Inventory Stock on Hand by Vendor." The first new category is Returned Salvage. The second is Returned New. Be sure the value of RS materials includes the cost of any reconditioning done to restore salvaged materials (such as pumps and boilers) to serviceable condition.
6. Comparing MET deployed to the job site with MET returned to inventory yields MET actually used on the job. That's a very important number to every plumbing and HVAC estimator. Be sure actual usage gets entered on the Project Summary form.
7. When the take-off on your next estimate is complete, compare that materials list with a summary of RS and RN materials on hand from prior jobs.
8. Evaluate which returned materials can be redeployed on the new job.
9. It's a management decision to either (1) charge the new job for the cost of RS and RN materials already on hand, or (2) consider materials on hand as "free" and a competitive advantage in winning the new bid. Either way, RN and RS materials are an asset to your company.

## National Plumbing & HVAC Estimator

Plumbing and HVAC materials are expensive. Every mechanical contractor has an interest in MET tracking. Everyone in your company should be aware of the need for good materials management. Used correctly, the MET form in this book can help engineer more value into your jobs.

### Maximizing the Value of Old Estimates

There should be two profits in every job. The first is money in the bank — a return on time and expenses. The second is what you learn from the job — primarily by comparing the estimate you made with what turns out to be your actual cost. On some jobs, the value of lessons learned may outweigh net revenue.

Every plumbing and HVAC contractor has marginal jobs. That's normal. What *shouldn't* be normal is repeating mistakes. The best way to avoid trouble in your future is to keep track of your past. Keeping old estimates available for reference can help prevent errors on new estimates.

As your file of completed estimates grows, organization becomes more important. You need an easy way to find similar projects with the same components and comparable scope of work. If your estimating file is in QuickBooks Pro, searching by keyword may be enough. Otherwise, I recommend creating a short summary for each completed job, and an index that references all summaries available for comparison. You'll find a blank Project Summary form at the end of this section. To make reference easier, create an index by type of job and equipment used. You may choose to use an alphabetical index based on client name or project ID.

How to complete the Project Summary form is obvious. The many ways to use this form may not be so obvious, so here are a few pointers.

1. Use your index of Project Summary forms to find completed jobs most similar to the job you're bidding. Believe it or not, Project Summary forms with the widest margin of error will be most useful. Ask yourself: Who worked on those projects? Who was the field superintendent? Who were the vendors? Did the errors result from poor estimating or the poor performance of vendors, supervisors or crews? The most common estimating errors occur when (a) inspecting the job site, (b) examining the plans or (c) reading the specifications. What did you miss and why? Look for pitfalls to avoid in the job now being estimated. Identify the biggest two or three mistakes made when bidding that job. Make a notation about each on the Project Summary form.
2. Now look at your bid for the current job. Which mistakes made on a prior job might you expect on this job? Concentrate on the big three oversights to avoid: Inspecting the job site; examining the plans; and reading the specifications.
3. Unless there's a major error in take-off, your estimate of material costs should be within about 5 percent of the actual costs of materials. However, it's common for labor cost estimates to vary 20 percent or more from actual labor costs. This is precisely where data from old jobs comes in handy. If your Project Summary files show that some project types are consistent money-losers, either shift your company's focus to another class of work, factor more contingency into your bids, or find some way to wring inefficiencies out of the labor component. Poor staging, delivery and retrieval procedures drag down labor productivity on any job.
4. Use your file of Project Summary forms to spot any common thread that runs through either money-making jobs or money-losing jobs. For example, if the names of certain subcontractors or vendors are prominent on low-margin jobs, maybe there's a relationship between your profit margin and choice of subs and suppliers. Even the best and most reliable vendors can become complacent if not challenged occasionally.
5. Project Summary forms should note changes and extras identified after the contract was signed — both for which your company was paid and changes done without additional compensation. Projects with changes and extras that exceed about 4 percent of the contract price deserve special scrutiny. Jobs with changes beyond about 4 percent aren't good for business, at least in my opinion. Nearly all changes have a negative impact on your job schedule and require a disproportionate investment of management resources. Too many changes can antagonize the owner and design staff, even if they were responsible for the altered plans. You may know of a mechanical contractor with a reputation for capitalizing on change orders. But I've rarely seen a job plagued with changes that turned into a money-maker for anyone — except the attorneys. Your file of Project Summary forms will show job types that carry change order risk. Before finalizing and submitting any bid, consider whether the job will get mired in disputes over changes and extras. If similar jobs have ended on the courthouse steps, factor that risk into your estimate.



Utility of a Project Summary forms file is limited only by your ingenuity. The important point is to keep and organize the source of your second profit available on every job. What you learn can be more valuable than what you earn.

## **The Estimating Procedure**

Every plumbing and HVAC estimator works under deadline pressure. You'll seldom have the luxury of spending as much time as you would like on an estimate. Estimators who aren't organized waste valuable time and tend to make careless errors. Try to be well-organized and consistent in your approach to estimating. For most projects, I recommend that you follow the procedures listed below and in the order listed:

1. Get a second set of project drawings and specifications for use by your suppliers and subcontractors. Remember that your subs and suppliers need access to the plans and specs and time to prepare their quotes.
2. Study the plans and specs carefully. Highlight important items. Make a list of specific tasks that require labor unit correction factors. The estimate is never complete until you're totally familiar with the project and the applicable construction codes.
3. Get the general contractor or owner to identify the proposed construction schedule and subcontractor lay-down (storage) area. Work schedule and site conditions always affect your costs.
4. Contact all potential suppliers and subcontractors as early as possible. Set a time when each can come to your office to make their take-offs from the spare set of contract documents.

When this important preliminary work is done, or in progress, it's time to begin your detailed take-off.

## **Guidelines for Good Estimating**

You can compile estimates on a legal pad, a printed estimating form or on a computer. Regardless of the method, these guidelines will apply:

**List Each Cost Separately** on your take-off sheet. Don't combine system estimates, even if the materials are the same type. A combined system estimate may have to be completely redone if materials for one system are changed at a later date. Use the Estimate Detail Sheet on page 16 if you don't already have a good material take-off form.

**Use Engineer's Identification Numbers** when listing equipment. The word pump without any other description is ambiguous when there are several pumps included in the project.

**Don't Forget Labor Adjustment** factors if your labor costs are significantly higher or lower than the costs used in this book. See instructions on page 7 for adjusting labor costs.

**Use Colored Pencils** or highlighters to mark the items you've taken off and listed. Use a different color for each piping or ducting system.

**Log Telephone Quotes** and other important phone conversations on a telephone quote form. See the sample on page 18.

**Project Estimated Costs** for labor, material and equipment to the time when the work is expected to be done, not when the job is being estimated.

The only good estimate is a complete estimate. You've probably heard this saying, "He who makes the most mistakes is likely to be low bidder, and live to regret it."

## **Preparing the Proposal**

It's both common courtesy and good business practice to deliver an unpriced copy of your bid or proposal letter to the general contractor three or four days before the bid deadline date. This gives the contractor time to study your proposal and obtain alternate pricing for items you may have excluded. To avoid misunderstandings, make sure your proposals include, as a minimum, the following elements:

1. The complete name and address of the proposed project.
2. Specification title and issue date.
3. A complete listing of drawings and their issue or revision date.
4. A complete list of addenda and their dates of issue.
5. A list of specification section numbers covered by your proposal.
6. A list of exclusions, clarifications and assumptions.

Your final bid can be phoned in or sent by fax, but it should reach the general contractor or owner no more than five or ten minutes before the bid deadline. Prices submitted too early may have to be revised because of last-minute price changes by subcontractors or suppliers.

### MET Worksheet

#### Material, Equipment and Tool Delivery and Surplus Return Record

Project ID \_\_\_\_\_  
 Supervisor \_\_\_\_\_

Job Location \_\_\_\_\_  
 Start Date \_\_\_\_\_

Description of Material, Equipment or Tool Delivered or Returned	Delivered to Job Site		Returned to Inventory			
	Quantity Delivered	Date Delivered	Quantity Returned	Date Returned	Status Code RN or RS	Value at Return



## PROJECT SUMMARY

Project ID \_\_\_\_\_ Job Location \_\_\_\_\_

Short description \_\_\_\_\_

Supervisor \_\_\_\_\_

Index ID \_\_\_\_\_ Start Date \_\_\_\_\_

Estimator \_\_\_\_\_ Client \_\_\_\_\_

Major vendors \_\_\_\_\_ Subcontractors \_\_\_\_\_

\_\_\_\_\_

Sources of cost deviation \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

Related Projects by ID Number \_\_\_\_\_


	Thumbnail Summary	Labor	Material	Equipment	Subcontract	Deployed RN/RS	Total
<b>Actual cost</b>							
Estimate Over/(Under)							
<b>Full Summary</b>							
Bid amount							
Estimated cost							
Projected profit							
Cost overrun							
Bid profit							
Change orders							
Cost of changes							
Total profit							
Total profit with RN/RS							
Redeployment							

### Estimate Detail Sheet

Data carried forward from Take-Off Quantity Survey Sheet(s)

Company/Department \_\_\_\_\_ Estimator \_\_\_\_\_ Date \_\_\_\_\_  
 Project \_\_\_\_\_ Checked by \_\_\_\_\_ Date \_\_\_\_\_  
 Address \_\_\_\_\_ Notes: \_\_\_\_\_  
 Job description \_\_\_\_\_ Estimate # \_\_\_\_\_  
 CSI Division/Account \_\_\_\_\_ Estimate due \_\_\_\_\_

Item Description	Quantity	Unit	Crew @ MH/Unit	Manhours Ext.	Materials		Labor		Equipment		Subcontract		Total \$
					Unit \$	Ext. \$	Unit \$	Ext. \$	Unit \$	Ext. \$	Unit \$	Ext. \$	
<b>Totals This Sheet</b>						<b>Material \$</b>	<b>Labor \$</b>	<b>Equipment \$</b>	<b>Subcontract \$</b>	<b>Total \$</b>			

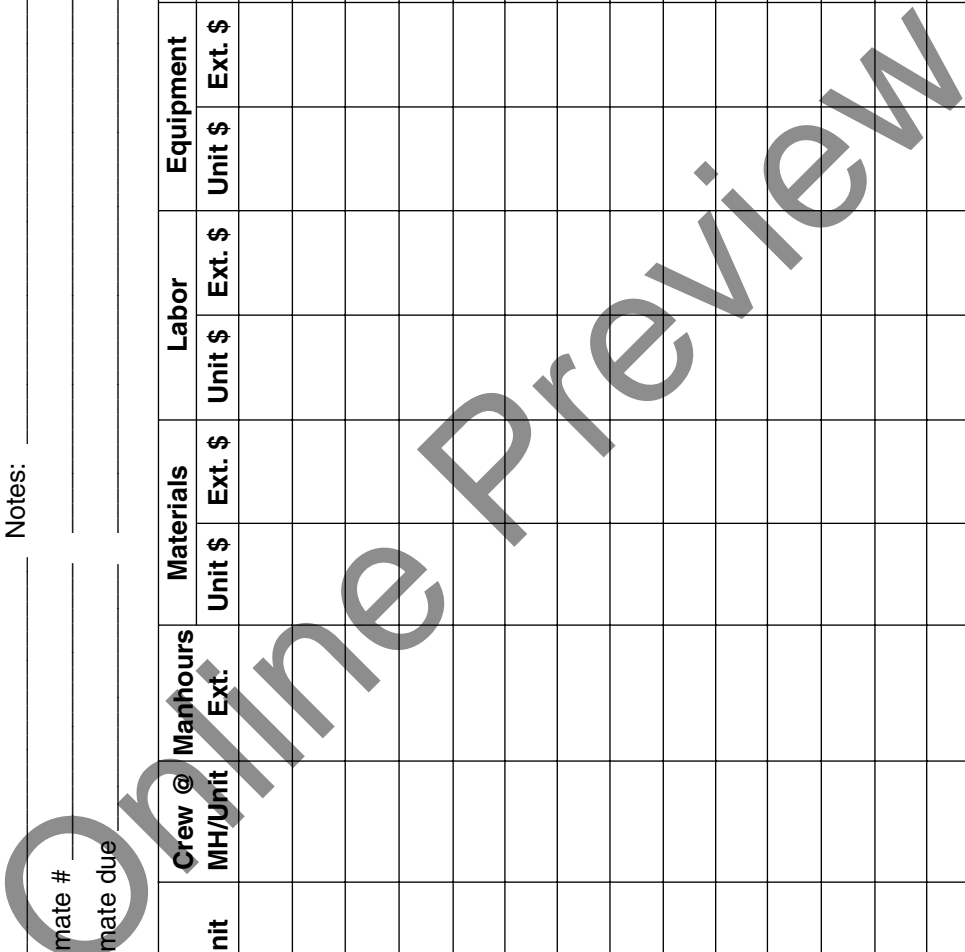

Carry totals forward to Estimate Summary Sheet Estimate # \_\_\_\_\_ of \_\_\_\_\_ Estimate Detail Sheet

## Quotation Sheet

Job: \_\_\_\_\_

Supplier: \_\_\_\_\_

Salesperson: \_\_\_\_\_ Phone No: \_\_\_\_\_

Per Plans/Specs: \_\_\_\_\_ Freight: \_\_\_\_\_ Terms: \_\_\_\_\_

Description	Delivery Time	Price

By: \_\_\_\_\_




## Domestic Hot Water Heaters

Description	Craft@Hrs	Unit	Material \$	Labor \$	Equipment \$	Total \$
-------------	-----------	------	-------------	----------	--------------	----------

**Electric domestic hot water heater (residential).** Set in place only (floor models). Make additional allowances for pipe and electrical connections. (See below)

6 gallon						
1.5 KW/110V	P1@.500	Ea	480.00	19.50	—	499.50
10 gallon						
1.5 KW/110V	P1@.500	Ea	538.00	19.50	—	557.50
15 gallon						
1.5 KW/110V	P1@.750	Ea	565.00	29.30	—	594.30
20 gallon						
1.5 KW/110V	P1@.750	Ea	531.00	29.30	—	560.30
30 gallon						
1.5 KW/110V	P1@1.00	Ea	545.00	39.00	—	584.00
40 gallon						
1.5 KW/110V	P1@1.20	Ea	570.00	46.80	—	616.80
50 gallon						
3 KW/110V	P1@1.30	Ea	615.00	50.70	—	665.70
12 gallon						
3 KW/220V	P1@.500	Ea	473.00	19.50	—	492.50
20 gallon						
3 KW/220V	P1@.750	Ea	518.00	29.30	—	547.30
30 gallon						
3 KW/220V	P1@1.00	Ea	592.00	39.00	—	631.00
40 gallon						
3 KW/220V	P1@1.20	Ea	644.00	46.80	—	690.80
50 gallon						
3 KW/220V	P1@1.30	Ea	690.00	50.70	—	740.70




**Electric domestic hot water heater (commercial), 208/240 volt.** Set in place only. Make additional allowances for pipe and electrical connections. (See below)

96 gallon, 12 kw	P1@1.50	Ea	2,720.00	58.50	—	2,778.50
96 gallon, 18 kw	P1@1.50	Ea	3,690.00	58.50	—	3,748.50
96 gallon, 36 kw	P1@1.50	Ea	3,830.00	58.50	—	3,888.50
120 gallon, 18 kw	P1@2.00	Ea	3,920.00	78.10	—	3,998.10
120 gallon, 36 kw	P1@2.00	Ea	4,040.00	78.10	—	4,118.10
120 gallon, 54 kw	P1@2.00	Ea	4,780.00	78.10	—	4,858.10
120 gallon, 63 kw	P1@2.00	Ea	5,160.00	78.10	—	5,238.10

**Gas-fired domestic hot water heater (residential).** Set in place only, Make additional allowances for pipe and combustion venting connections. (See below)

30 gallon	P1@1.00	Ea	559.00	39.00	—	598.00
40 gallon	P1@1.00	Ea	904.00	39.00	—	943.00
50 gallon	P1@1.50	Ea	1,030.00	58.50	—	1,088.50



## Domestic Hot Water Heaters

Description    Craft@Hrs    Unit    Material \$    Labor \$    Equipment \$    Total \$

**Gas-fired domestic hot water heater (commercial), standard efficiency.** Set in place only, Make additional allowances for pipe and combustion venting connections. (See below)

50 gal./ 95 gph	P1@2.00	Ea	2,710.00	78.10	—	2,788.10
67 gal./106 gph	P1@2.00	Ea	3,210.00	78.10	—	3,288.10
76 gal./175 gph	P1@2.00	Ea	4,290.00	78.10	—	4,368.10
91 gal./291 gph	P1@2.00	Ea	5,190.00	78.10	—	5,268.10

**Gas-fired domestic hot water heater (commercial), energy miser.** Set in place only, Make additional allowances for pipe and combustion venting connections. (See below)



50 gal./ 95 gph	P1@2.00	Ea	6,690.00	78.10	—	6,768.10
67 gal./106 gph	P1@2.00	Ea	6,990.00	78.10	—	7,068.10
76 gal./175 gph	P1@2.00	Ea	8,660.00	78.10	—	8,738.10
91 gal./291 gph	P1@2.00	Ea	10,300.00	78.10	—	10,378.10

**Tankless natural gas water heaters.** Ambient pressure. DOE and UL rated. For residential, multi-dwelling and light commercial potable water applications. Add the cost of piping, tempering valve, circulating pump, controls, and electrical connection, post-installation inspection by both the fire marshal and the mechanical inspector to validate federal, state and local energy tax credits or energy tax credit offsets. For larger arrays (laundries, institutional facilities, food processing plants), develop an estimate based on the required capacity and multiply these costs by the number of heaters required. Rated in Btus and gallons per minute capacity. (1 Mbh = 1,000 Btus)

19.5-140 Mbh, .75-5.8 Gpm	P1@16.0	Ea	1,950.00	624.00	—	2,574.00
11-199 Mbh, .5-7 Gpm	P1@20.0	Ea	2,310.00	781.00	—	3,091.00
25-235 Mbh, .75-9.6 Gpm	P1@20.0	Ea	3,000.00	781.00	—	3,781.00

**Tankless electric point-of-use water heaters.** Ambient pressure, DOE and UL rated. For residential, multi-dwelling and light commercial potable water applications. Cost does not include piping, tempering valve, circulating pump, controls, storage tank, electrical connection. Add the cost of post-installation inspection by the mechanical inspector to validate federal, state and local energy tax credits or energy tax credit offsets. In rated gallons per minute capacity.

5.5 Kw/40 Amp, .75-2 Gpm	P1@4.00	Ea	492.00	156.00	—	648.00
9.5 Kw/50 Amp, .75-2.5 Gpm	P1@4.25	Ea	582.00	166.00	—	748.00
19 Kw/100 Amp, 1-3.5 Gpm	P1@4.50	Ea	969.00	176.00	—	1,145.00
28 Kw/120 Amp, 1.5-5 Gpm	P1@4.75	Ea	1,770.00	185.00	—	1,955.00





## Domestic Hot Water Heater Connections

Description	Craft@Hrs	Unit	Material \$	Labor \$	Equipment \$	Total \$
-------------	-----------	------	-------------	----------	--------------	----------

**Domestic hot water heater connection assembly.** Includes supply, return, recirculation and relief piping and fittings (copper), relief and isolation valves. Make additional allowances for gas and venting connections where applicable.

¾" residential	P1@1.75	Ea	305.00	68.30	—	373.30
¾" commercial	P1@2.25	Ea	409.00	87.80	—	496.80
1" commercial	P1@2.75	Ea	716.00	107.00	—	823.00
1¼" commercial	P1@3.50	Ea	877.00	137.00	—	1,014.00
1½" commercial	P1@3.75	Ea	913.00	146.00	—	1,059.00
2" commercial	P1@4.50	Ea	973.00	176.00	—	1,149.00
2½" commercial	P1@5.75	Ea	2,020.00	224.00	—	2,244.00
3" commercial	P1@6.50	Ea	3,100.00	254.00	—	3,354.00

**Domestic water heater combustion vent connection.** Make additional allowances for piping distances greater than 25'.

2" B-vent	P1@.090	LF	6.61	3.51	—	10.12
3" B-vent	P1@.100	LF	8.17	3.90	—	12.07
4" B-vent	P1@.110	LF	10.80	4.29	—	15.09
6" B-vent	P1@.130	LF	13.30	5.07	—	18.37
Tankless heater vent kit	P1@2.50	Ea	626.00	97.60	—	723.60
Power vent kit	P1@2.00	Ea	1,540.00	78.10	—	1,618.10

Online Preview

## Water Softeners and Controllers

Description	Craft@Hrs	Unit	Material \$	Labor \$	Equipment \$	Total \$
-------------	-----------	------	-------------	----------	--------------	----------

**Water softener, time clock controller.** Including brine tank, brine well and pick-up tube. Labor includes setting in place, connecting the unit to an existing domestic water distribution system, start up and testing.

20,000 grain water softener, TCC	P1@4.50	Ea	607.00	176.00	—	783.00
30,000 grain water softener, TCC	P1@4.50	Ea	647.00	176.00	—	823.00
45,000 grain water softener, TCC	P1@4.50	Ea	719.00	176.00	—	895.00
50,000 grain water softener, TCC	P1@4.75	Ea	811.00	185.00	—	996.00
60,000 grain water softener, TCC	P1@4.75	Ea	959.00	185.00	—	1,144.00
75,000 grain water softener, TCC	P1@5.00	Ea	1,030.00	195.00	—	1,225.00
90,000 grain water softener, TCC	P1@5.50	Ea	1,400.00	215.00	—	1,615.00
120,000 grain water softener, TCC	P1@5.75	Ea	1,500.00	224.00	—	1,724.00

**Water softener, mechanically-metered controller.** Including brine tank, brine well and pick up tube. Labor includes setting in place, connecting the unit to an existing domestic water distribution system, start up and testing.

20,000 grain water softener, MMC	P1@4.50	Ea	788.00	176.00	—	964.00
30,000 grain water softener, MMC	P1@4.50	Ea	823.00	176.00	—	999.00
45,000 grain water softener, MMC	P1@4.50	Ea	896.00	176.00	—	1,072.00
50,000 grain water softener, MMC	P1@4.75	Ea	986.00	185.00	—	1,171.00
60,000 grain water softener, MMC	P1@4.75	Ea	1,150.00	185.00	—	1,335.00
75,000 grain water softener, MMC	P1@5.00	Ea	1,230.00	195.00	—	1,425.00
90,000 grain water softener, MMC	P1@5.50	Ea	1,580.00	215.00	—	1,795.00
120,000 grain water softener, MMC	P1@5.75	Ea	1,680.00	224.00	—	1,904.00

## Water Softeners and Controllers

Description	Craft@Hrs	Unit	Material \$	Labor \$	Equipment \$	Total \$
-------------	-----------	------	-------------	----------	--------------	----------

**Water softener, electronically-metered controller.** Including brine tank, brine well and pick up tube. Labor includes setting in place, connecting the unit to an existing domestic water distribution system, start up and testing.

20,000 grain water softener, EMC	P1@4.50	Ea	836.00	176.00	—	1,012.00
30,000 grain water softener, EMC	P1@4.50	Ea	861.00	176.00	—	1,037.00
45,000 grain water softener, EMC	P1@4.50	Ea	945.00	176.00	—	1,121.00
50,000 grain water softener, EMC	P1@4.75	Ea	1,030.00	185.00	—	1,215.00
60,000 grain water softener, EMC	P1@4.75	Ea	1,210.00	185.00	—	1,395.00
75,000 grain water softener, EMC	P1@5.00	Ea	1,280.00	195.00	—	1,475.00
90,000 grain water softener, EMC	P1@5.50	Ea	1,620.00	215.00	—	1,835.00
120,000 grain water softener, EMC	P1@5.75	Ea	1,730.00	224.00	—	1,954.00

### Water softener accessories

By-pass valve Manifold	P1@.400	Ea	79.50	15.60	—	95.10
adapter kit	P1@.200	Ea	21.40	7.81	—	29.21
Turbulator	P1@.400	Ea	39.20	15.60	—	54.80

**Iron filter, electronically-metered controller.** Manganese green sand filter. Labor includes setting in place, connecting the unit to an existing domestic water distribution system, start-up and testing.

42,000 iron filter (1.5 cf media), 5 gpm	P1@4.00	Ea	791.00	156.00	—	947.00
65,000 iron filter (2.0 cf media), 6 gpm	P1@4.50	Ea	935.00	176.00	—	1,111.00
84,000 iron filter (2.5 cf media), 8 gpm	P1@4.75	Ea	999.00	185.00	—	1,184.00
Replacement green sand media	P1@1.20	CF	45.80	46.80	—	92.60

### Iron filter accessories

By-pass valve	P1@.400	Ea	80.50	15.60	—	96.10
Air vent	P1@.200	Ea	63.90	7.81	—	71.71
Air controller	P1@.400	Ea	72.10	15.60	—	87.70

## Water Softener Accessories

Description	Craft@Hrs	Unit	Material \$	Labor \$	Equipment \$	Total \$
-------------	-----------	------	-------------	----------	--------------	----------

**Combination iron filter/water softener.** Zeolite resins soften water and remove iron and manganese. Controller automatically controls PH level. Labor includes setting in place, connecting the unit to an existing domestic water distribution system, start-up and testing.

40,000 iron filter, 1.3 cf media	P1@4.00	Ea	1,530.00	156.00	—	1,686.00
60,000 iron filter, 1.7 cf media	P1@4.50	Ea	1,650.00	176.00	—	1,826.00
80,000 iron filter, 2.5 cf media	P1@4.75	Ea	2,400.00	185.00	—	2,585.00

**Hot water softener, time clock controller.** Brass valve construction. Designed for 150 F. maximum operating temperature. Includes brine tank, brine well and pick-up tube. Labor includes setting in place, connecting the unit to an existing domestic water distribution system, start-up and testing.

20,000 grain hot water softener	P1@4.50	Ea	1,920.00	176.00	—	2,096.00
30,000 grain hot water softener	P1@4.50	Ea	2,040.00	176.00	—	2,216.00
40,000 grain hot water softener	P1@4.50	Ea	2,130.00	176.00	—	2,306.00
60,000 grain hot water softener	P1@4.75	Ea	2,520.00	185.00	—	2,705.00

**Pressure tank, fiberglass wound.** Labor includes setting in place, connecting the tank to a domestic water distribution system and testing.

Fiberglass pressure tank, 20 gallon	P1@2.00	Ea	258.00	78.10	—	336.10
Fiberglass pressure tank, 30 gallon	P1@2.00	Ea	291.00	78.10	—	369.10
Fiberglass pressure tank, 80 gallon	P1@2.75	Ea	471.00	107.00	—	578.00
Fiberglass pressure tank, 120 gallon	P1@3.50	Ea	621.00	137.00	—	758.00
Brass tank tee assembly, ¾"	P1@3.50	Ea	41.60	137.00	—	178.60
Brass tank tee assembly, 1"	P1@3.50	Ea	77.50	137.00	—	214.50
Brass tank tee assembly, 1¼"	P1@3.50	Ea	132.00	137.00	—	269.00

Description	Craft@Hrs	Unit	Material \$	Labor \$	Equipment \$	Total \$
-------------	-----------	------	-------------	----------	--------------	----------

**Ultra-violet water disinfection unit.** Stainless steel reactor, audible and visible alarm, lamp end-of-life indicator and 7-day override. Gpm rating at 30,000 mj/m<sup>2</sup> output. Labor includes setting in place, connecting to the water system and testing.

UV system, 1 gpm, ¼" in/out	P1@3.00	Ea	268.00	117.00	—	385.00
UV system, 6 gpm, ½" in/out	P1@3.00	Ea	521.00	117.00	—	638.00
UV system, 8 gpm, ¾" in/out	P1@4.00	Ea	603.00	156.00	—	759.00
UV system, 12 gpm, ¾" in/out	P1@4.00	Ea	773.00	156.00	—	929.00
UV replacement lamp, 20W, 1 gpm	P1@.750	Ea	60.00	29.30	—	89.30
UV replacement lamp, 32W, 6 gpm	P1@.750	Ea	68.00	29.30	—	97.30
UV replacement lamp, 39W, 8-12 gpm	P1@.750	Ea	87.00	29.30	—	116.30
UV replacement ballast, 420 Mv/110V	P1@1.00	Ea	263.00	39.00	—	302.00

### Kitchen equipment booster heater

1,000 watt	P1@4.00	Ea	851.00	156.00	—	1,007.00
------------	---------	----	--------	--------	---	----------

### Dishwasher

Built-in	P1@5.00	Ea	939.00	195.00	—	1,134.00
----------	---------	----	--------	--------	---	----------


### Garbage disposal

½ HP	P1@2.00	Ea	186.00	78.10	—	264.10
¾ HP	P1@2.00	Ea	310.00	78.10	—	388.10




### Grease and oil interceptor

4 GPM	P1@4.00	Ea	379.00	156.00	—	535.00
10 GPM	P1@5.00	Ea	618.00	195.00	—	813.00
15 GPM	P1@7.00	Ea	922.00	273.00	—	1,195.00
20 GPM	P1@8.00	Ea	1,110.00	312.00	—	1,422.00



### Hair and lint interceptor

1½"	P1@.650	Ea	216.00	25.40	—	241.40
2"	P1@.750	Ea	308.00	29.30	—	337.30



### All bronze ¾" to 1½" in-line NPT pump

1/12 HP	P1@1.50	Ea	629.00	58.50	—	687.50
1/6 HP	P1@1.50	Ea	939.00	58.50	—	997.50
1/4 HP	P1@1.50	Ea	1,100.00	58.50	—	1,158.50

## Kitchen Equipment Connections

Description	Craft@Hrs	Unit	Material \$	Labor \$	Equipment \$	Total \$
-------------	-----------	------	-------------	----------	--------------	----------

### Kitchen appliance gas trim

1/2"	P1@1.15	Ea	46.20	44.90	—	91.10
3/4"	P1@1.30	Ea	84.50	50.70	—	135.20
1"	P1@1.60	Ea	98.00	62.40	—	160.40
1 1/4"	P1@2.10	Ea	162.00	82.00	—	244.00
1 1/2"	P1@2.50	Ea	205.00	97.60	—	302.60
2"	P1@3.00	Ea	273.00	117.00	—	390.00

### Hot and cold water supply

1/2"	P1@1.10	Ea	50.50	42.90	—	93.40
3/4"	P1@1.55	Ea	71.60	60.50	—	132.10
1"	P1@1.90	Ea	97.50	74.20	—	171.70
1 1/4"	P1@2.50	Ea	137.00	97.60	—	234.60
1 1/2"	P1@3.00	Ea	171.00	117.00	—	288.00

### Continuous waste

2-part	P1@.250	Ea	64.30	9.76	—	74.06
3-part	P1@.350	Ea	109.00	13.70	—	122.70
4-part	P1@.450	Ea	140.00	17.60	—	157.60

### Indirect waste

1/2"	P1@1.05	Ea	16.80	41.00	—	57.80
3/4"	P1@1.50	Ea	28.50	58.50	—	87.00
1"	P1@1.90	Ea	45.70	74.20	—	119.90
1 1/4"	P1@2.15	Ea	67.40	83.90	—	151.30
1 1/2"	P1@2.60	Ea	88.80	101.00	—	189.80
2"	P1@3.00	Ea	135.00	117.00	—	252.00

### Kitchen fixture waste tailpiece

1 1/2"	P1@.100	Ea	16.10	3.90	—	20.00
--------	---------	----	-------	------	---	-------

### Kitchen fixture trap with solder bushing

1 1/2"	P1@.250	Ea	54.20	9.76	—	63.96
2"	P1@.300	Ea	75.10	11.70	—	86.80



**Description      Craft@Hrs      Unit      Material \$      Labor \$      Equipment \$      Total \$**

**Water closet, floor-mounted, flush tank, white vitreous china, lined tank.** Complete with trim. Make additional allowances for rough-in. Based on American Standard Cadet series. ADA means American Disabilities Act compliant. (Wheelchair accessible)

Round bowl	P1@2.10	Ea	288.00	82.00	—	370.00
Elongated bowl	P1@2.10	Ea	348.00	82.00	—	430.00
ADA, 18" high	P1@2.10	Ea	474.00	82.00	—	556.00



**Water closet, floor-mounted, flush valve, white vitreous china.**

Complete with trim. Make additional allowances for rough-in. Based on American Standard. ADA means American Disabilities Act compliant. (Wheelchair accessible)


Elongated bowl	P1@2.60	Ea	451.00	101.00	—	552.00
Elongated bowl, ADA 18" high	P1@2.60	Ea	537.00	101.00	—	638.00
Elongated bowl with a bedpan cleanser	P1@4.10	Ea	779.00	160.00	—	939.00
Elongated bowl, ADA 18" high with a bedpan cleanser	P1@4.10	Ea	843.00	160.00	—	1,003.00

**Water closet, wall-hung, flush valve, white vitreous china.** Complete with fixture carrier and all trim. Make additional allowances for rough-in. Based on American Standard Afdwall series.

Elongated bowl	P1@3.55	Ea	714.00	139.00	—	853.00
Elongated bowl with electronic flush valve	P1@3.80	Ea	1,280.00	148.00	—	1,428.00
Elongated bowl with bedpan cleanser	P1@5.05	Ea	1,040.00	197.00	—	1,237.00
Electronic flush valve, add	P1@.600	Ea	565.00	23.40	—	588.40

**Urinal, wall-hung, flush valve, white vitreous china.** Complete with trim. Make additional allowances for rough-in.

Siphon-jet type	P1@3.15	Ea	714.00	123.00	—	837.00
Wash-out type	P1@3.10	Ea	583.00	121.00	—	704.00
Wash-down type	P1@3.00	Ea	412.00	117.00	—	529.00
Urinal carrier, add	P1@.600	Ea	128.00	23.40	—	151.40
Electronic flush valve, add	P1@.600	Ea	457.00	23.40	—	480.40



**Urinal, stall-type, flush valve, white vitreous china.** Complete with trim. Make additional allowances for rough-in.

Stall urinal	P1@5.00	Ea	1,360.00	195.00	—	1,555.00
--------------	---------	----	----------	--------	---	----------

## Plumbing Fixtures

Description    Craft@Hrs    Unit    Material \$    Labor \$    Equipment \$    Total \$

**Lavatory, wall-hung, white vitreous china.** Complete with trim and fixture carrier. Make additional allowances for rough-in. ADA means American Disabilities Act compliant. (Wheelchair accessible)




Wall-hung lav	P1@2.70	Ea	587.00	105.00	—	692.00
Wall-hung, ADA	P1@2.70	Ea	854.00	105.00	—	959.00
Fixture carrier	P1@.500	Ea	121.00	19.50	—	140.50

**Countertop lavatory, white.** Complete with trim. Make additional allowances for rough-in.



Vitreous china	P1@2.00	Ea	426.00	78.10	—	504.10
Enameled steel	P1@2.00	Ea	360.00	78.10	—	438.10
Acrylic	P1@2.00	Ea	262.00	78.10	—	340.10

**Bathtub, white, 60" x 32".** Complete with trim, including shower head. Make additional allowances for rough-in.



Enameled steel	P1@2.50	Ea	611.00	97.60	—	708.60
Cast iron	P1@3.50	Ea	882.00	137.00	—	1,019.00
Fiberglass	P1@2.50	Ea	564.00	97.60	—	661.60
Acrylic	P1@2.50	Ea	603.00	97.60	—	700.60

**Tub and shower combination, fiberglass, white.** Complete with trim. Make additional allowances for rough-in.

One-piece	P1@4.50	Ea	1,270.00	176.00	—	1,446.00
Two-piece (reno)	P1@5.50	Ea	1,630.00	215.00	—	1,845.00
Four-piece (reno)	P1@6.25	Ea	1,720.00	244.00	—	1,964.00

**Shower stall, white, 36" x 36".** Complete with trim. Make additional allowances for rough-in.



Fiberglass one-piece	P1@3.50	Ea	803.00	137.00	—	940.00
Fiberglass three-piece	P1@4.25	Ea	1,040.00	166.00	—	1,206.00
Acrylic one-piece	P1@3.50	Ea	1,210.00	137.00	—	1,347.00
Acrylic three-piece	P1@4.25	Ea	1,590.00	166.00	—	1,756.00

**Shower basin, 36" x 36".** Complete with trim (faucet, shower head and strainer). Make additional allowances for rough-in.

Fiberglass	P1@2.50	Ea	543.00	97.60	—	640.60
Acrylic	P1@2.50	Ea	583.00	97.60	—	680.60
Molded stone	P1@2.65	Ea	565.00	103.00	—	668.00

**Description    Craft@Hrs    Unit    Material \$    Labor \$    Equipment \$    Total \$**

**Kitchen sink, double compartment.** Complete with trim. Make additional allowances for rough-in.

Stainless steel	P1@2.15	Ea	448.00	83.90	—	531.90
Cast iron	P1@2.50	Ea	584.00	97.60	—	681.60
Acrylic	P1@2.15	Ea	530.00	83.90	—	613.90



**Kitchen sink, single compartment.** Complete with trim. Make additional allowances for rough-in.

Stainless steel	P1@2.00	Ea	378.00	78.10	—	456.10
Cast iron	P1@2.10	Ea	437.00	82.00	—	519.00
Acrylic	P1@2.00	Ea	394.00	78.10	—	472.10

**Bar sink.** Complete with trim. Make additional allowances for rough-in.

Stainless steel	P1@2.00	Ea	321.00	78.10	—	399.10
Acrylic	P1@2.00	Ea	216.00	78.10	—	294.10



**Exam room sink.** Complete with trim. Make additional allowances for rough-in.

Stainless steel	P1@2.10	Ea	467.00	82.00	—	549.00
Acrylic	P1@2.10	Ea	399.00	82.00	—	481.00

**Laboratory sink.** Complete with trim. Make additional allowances for rough-in.

Stainless steel	P1@2.25	Ea	536.00	87.80	—	623.80
Acrylic	P1@2.25	Ea	467.00	87.80	—	554.80

**Laundry sink, double compartment.** Complete with trim. Make additional allowances for rough-in.

Cast iron	P1@3.50	Ea	626.00	137.00	—	763.00
Acrylic	P1@2.25	Ea	275.00	87.80	—	362.80

**Laundry sink, single compartment.** Complete with trim. Make additional allowances for rough-in.

Cast iron	P1@2.75	Ea	542.00	107.00	—	649.00
Acrylic	P1@2.00	Ea	190.00	78.10	—	268.10



**Mop sink, floor-mounted, 36" x 24".** Complete with trim. Make additional allowances for rough-in.

Molded stone	P1@2.65	Ea	762.00	103.00	—	865.00
Terrazzo	P1@2.65	Ea	840.00	103.00	—	943.00
Acrylic	P1@2.35	Ea	588.00	91.70	—	679.70

## Plumbing Fixtures

Description    Craft@Hrs    Unit    Material \$    Labor \$    Equipment \$    Total \$



**Slop sink, enameled cast iron with P-trap, standard.** Complete with trim. Make additional allowances for rough-in.


Slop sink with P-trap, std.	P1@3.50	Ea	1,280.00	137.00	—	1,417.00
-----------------------------	---------	----	----------	--------	---	----------

**Floor sink, recessed, enameled steel, white.** Add 40% to material prices for acid-resisting finish. Complete with strainer. Make additional allowances for rough-in.




9" x 9"	P1@1.00	Ea	112.00	39.00	—	151.00
12" x 12"	P1@1.00	Ea	131.00	39.00	—	170.00
15" x 15"	P1@1.15	Ea	89.30	44.90	—	134.20
18" x 18"	P1@1.25	Ea	117.00	48.80	—	165.80
24" x 24"	P1@1.50	Ea	159.00	58.50	—	217.50

**Drinking fountain, refrigerated, stainless steel.** Complete with trim. Make additional allowances for rough-in. ADA means American Disabilities Act compliant. (Wheelchair accessible)



Free-standing	P1@2.00	Ea	1,310.00	78.10	—	1,388.10
Semi-recessed	P1@2.50	Ea	1,750.00	97.60	—	1,847.60
Fully-recessed	P1@2.50	Ea	3,020.00	97.60	—	3,117.60
Wall-hung	P1@2.00	Ea	1,230.00	78.10	—	1,308.10
Wall-hung, ADA	P1@2.50	Ea	3,020.00	97.60	—	3,117.60

**Drinking fountain, non-refrigerated.** Complete with trim. Make additional allowances for rough-in. ADA means American Disabilities Act compliant. (Wheelchair accessible) S.S. means stainless steel.



Recessed, china	P1@2.50	Ea	1,040.00	97.60	—	1,137.60
Wall-hung, china	P1@2.00	Ea	591.00	78.10	—	669.10
Recessed, S.S.	P1@2.50	Ea	1,180.00	97.60	—	1,277.60
Wall-hung, S.S.	P1@2.00	Ea	629.00	78.10	—	707.10
ADA, S.S.	P1@2.50	Ea	1,070.00	97.60	—	1,167.60

**Plumbing Fixtures Rough-in**

Description	Craft@Hrs	Unit	Material \$	Labor \$	Equipment \$	Total \$
<b>Commercial plumbing fixture rough-in.</b> Includes type L copper supply pipe and DWV copper (to 2½") or cast iron (MJ) DWV (over 2½") drain and vent piping. Make additional allowances for plumbing fixtures and trim. Use these costs for preliminary estimates.						
Water closet, wall-hung, flush valve, with carrier	P1@2.25	Ea	945.00	87.80	—	1,032.80
Water closet, wall-hung, flush valve, no carrier	P1@1.95	Ea	866.00	76.10	—	942.10
Water closet, floor-mounted, flush valve	P1@2.75	Ea	765.00	107.00	—	872.00
Water closet, floor-mounted, tank type	P1@2.25	Ea	587.00	87.80	—	674.80
Bidet	P1@2.00	Ea	408.00	78.10	—	486.10
Urinal, wall-hung, flush valve, with carrier	P1@3.10	Ea	1,030.00	121.00	—	1,151.00
Urinal, wall-hung, flush valve, without carrier	P1@2.35	Ea	587.00	91.70	—	678.70
Lavatory, wall-hung, with carrier	P1@2.40	Ea	850.00	93.70	—	943.70
Lavatory	P1@1.90	Ea	408.00	74.20	—	482.20
Sink	P1@1.90	Ea	440.00	74.20	—	514.20
Bath tub	P1@2.35	Ea	628.00	91.70	—	719.70
Shower	P1@2.60	Ea	736.00	101.00	—	837.00
Mop sink	P1@2.40	Ea	522.00	93.70	—	615.70
Slop sink	P1@2.60	Ea	373.00	101.00	—	474.00
Laundry tub	P1@1.95	Ea	444.00	76.10	—	520.10
Wash fountain	P1@2.10	Ea	478.00	82.00	—	560.00
Lab sink, glass drainage	P1@3.80	Ea	1,890.00	148.00	—	2,038.00
Lab sink, acid resistant plastic drainage	P1@2.65	Ea	300.00	103.00	—	403.00
Drinking fountain	P1@2.20	Ea	325.00	85.90	—	410.90
Emergency eyewash and shower	P1@1.75	Ea	123.00	68.30	—	191.30
Washing machine	P1@2.25	Ea	477.00	87.80	—	564.80

## Plumbing Fixtures Rough-in

Description	Craft@Hrs	Unit	Material \$	Labor \$	Equipment \$	Total \$
-------------	-----------	------	-------------	----------	--------------	----------

**Commercial plumbing fixture group rough-in.** Includes Type L copper supply pipe and DWV copper (to 2½") or cast iron (MJ) DWV (over 2½") drain and vent piping. Make additional allowances for plumbing fixtures and trim. Use these costs for preliminary estimates.

3-piece washroom group	P1@5.50	Ea	1,120.00	215.00	—	1,335.00
3-piece washroom group back to back	P1@9.75	Ea	2,080.00	381.00	—	2,461.00
Kitchen sink, back to back	P1@2.15	Ea	606.00	83.90	—	689.90
Battery of water closets, floor-mounted, tank type, per water closet	P1@1.75	Ea	472.00	68.30	—	540.30
Battery of water closets, floor-mounted, flush valve, per water closet	P1@2.20	Ea	617.00	85.90	—	702.90
Battery of water closets, wall-hung, flush valve, with carrier, per water closet	P1@1.80	Ea	811.00	70.30	—	881.30
Battery of water closets, wall-hung, flush valve, without carrier, per water closet	P1@1.50	Ea	238.00	58.50	—	296.50
Battery of urinals, wall-hung, flush valve with carrier, per urinal	P1@2.45	Ea	975.00	95.60	—	1,070.60
Battery of urinals, wall-hung, flush valve without carrier, per urinal	P1@1.90	Ea	503.00	74.20	—	577.20
Battery of lavatory basins, wall-hung, with carrier, per lavatory	P1@2.00	Ea	759.00	78.10	—	837.10
Battery of lavatory basins, without carrier, per lavatory	P1@1.50	Ea	343.00	58.50	—	401.50

**Residential plumbing fixture rough-in.** Includes polyethylene (PE) supply pipe and ABS DWV drain and vent piping. Make additional allowances for plumbing fixtures and trim. Use these costs for preliminary estimates.

Water closet, floor-mounted, tank type	P1@2.00	Ea	131.00	78.10	—	209.10
Bidet	P1@1.85	Ea	98.20	72.20	—	170.40
Lavatory	P1@1.75	Ea	98.20	68.30	—	166.50
Counter sink	P1@1.75	Ea	108.00	68.30	—	176.30
Bathtub	P1@2.10	Ea	98.20	82.00	—	180.20
Shower	P1@2.45	Ea	144.00	95.60	—	239.60
Laundry tub	P1@1.75	Ea	89.60	68.30	—	157.90
Washing machine	P1@2.00	Ea	111.00	78.10	—	189.10



# Index

<b>A</b>	
ABS, DWV pipe .....	150
1/8 bend.....	150
1/4 bend.....	150
adapters.....	152
bushings .....	152
cleanouts .....	152
closet bend .....	150
closet flanges.....	150
combinations .....	151
couplings .....	153
hanger assemblies .....	153
P-traps .....	151
reducers.....	153
riser clamps .....	153
solvent-weld joints .....	152-153
tees.....	151
wyes .....	151-152
ABS, DWV, test cap .....	152
A/C systems .....	286
Access doors, steel .....	121
Accessories	
iron filter.....	23
water softener.....	23
Acid DWV systems .....	164
Actuator, damper.....	404
Adapters	
copper, DWV, soldered .....	148
copper, press fit.....	88
CPVC sprinkler pipe .....	184
F.I.P., ABS.....	152
PE-AL pipe .....	113
PEX-AL pipe .....	113
polypropylene pipe .....	166
PVC, DWV.....	156
PVC, Schedule 40 .....	94
PVC, Schedule 80 .....	104
PVC sewer, bell & spigot.....	163
Schedule 5 steel, pressfit .....	236
Schedule 10 steel, roll-grooved.....	275
Schedule 40 steel, cut-grooved.....	281
Schedule 40 steel, roll-grooved.....	268
Type K copper, brazed.....	37
Type K copper, soldered .....	47-48
Type L copper, brazed .....	56
Type L copper, soldered.....	64
Type M copper, brazed .....	73
Type M copper, soldered.....	81
Additional costs .....	8
Adjusting costs .....	7
Air admittance valve .....	328
Air balance software.....	338
Air balancing	
air handling units .....	402
centrifugal fans .....	403
diffusers .....	402
fan coil units .....	403
fume hoods.....	403
grilles .....	403
terminal boxes .....	402
Air compressor .....	406
rental.....	420
Air conditioning	
budget estimates .....	435
residential .....	286
Air conditioning condensate systems	
PVC, Schedule 40 .....	91
PVC, Schedule 80 .....	101
Type K copper, brazed.....	33
Type K copper, soldered .....	43
Type L copper, brazed .....	53
Type L copper, soldered.....	61
Type M copper, brazed .....	70
Type M copper, soldered.....	78
Air conditioning units.....	288
Air cooled condenser.....	426
condensing unit .....	212
Air grilles, return .....	333
Air handling equipment	
air conditioner.....	288
exhaust fans .....	326
housings .....	331
ventilators .....	326
Air handling units.....	289
accessories.....	290
air balancing .....	402
coil connection.....	297-298
removal.....	424
Air mixing box, removal.....	423
Air separators, Rolaitrol type.....	201
Air vents .....	121
Alarm valves.....	171
Apartments, HVAC estimates.....	437
Area drains .....	168
installation costs .....	435
Arresters, water hammer.....	133
As-built drawings .....	421
Assemblies	
air conditioning .....	286
forced air heating.....	287
Auditoriums, HVAC estimates .....	437
<b>B</b>	
Backfill costs, trenching.....	418
Backflow preventers	
double check .....	120
reduced pressure.....	119
Backhoes, rental.....	420
Balancing valves PEX-AL pipe... 114, 118	
Ball valves	
copper, press fit.....	88
PEX-AL pipe.....	114, 118
pipe and plumbing specialty... 126-127	
PVC, Schedule 40 .....	97
PVC, Schedule 80 .....	107
PVC, Solid body, EDPM.....	97, 107
PVC, Solid body, threaded.....	97, 107
PVC, Tru-union, threaded .....	97, 107
PVC, Union type, Solvent	
weld .....	98, 107
Schedule 40 steel, threaded.....	230
Schedule 80 steel, threaded.....	252
Type K copper, brazed.....	40
Type K copper, soldered .....	50
Type L copper, brazed .....	59
Type L copper, soldered.....	67
Type M copper, brazed .....	76
Type M copper, soldered.....	84
Banks, HVAC estimates .....	437
Bar sinks.....	29
estimating .....	435
Barber shops, HVAC estimates .....	437
Base wage.....	6
Baseboard fins .....	204
Bathroom	
fans.....	328-329
fixtures .....	28
heaters.....	328
Bathroom sink, disconnect .....	433
Bathtubs .....	28
disconnect .....	433
estimating .....	435
Beauty shops, HVAC estimates .....	437
Bell & spigot pipe, PVC.....	159
Benders, hydraulic, rental.....	420
Bends	
ABS, DWV pipe .....	150
cast iron, no-hub.....	136-138
class 110 DI, cement lined .....	411
class 150 cast iron.....	412
class 153 DI, cement lined .....	407
class 153 DI, double cement	
lined.....	409
class 2400 or 3000 asbestos	
cement.....	413
copper, DWV, soldered .....	147
polypropylene pipe .....	164
PVC, DWV.....	159-160
PVC sewer, bell & spigot.....	160
Bevel machines, rental .....	420
Billing breakdown worksheet... 461-462	



Biomass fired			
boilers.....	319-320	Type M copper, brazed.....	77
central airspace heater.....	321	Type M copper, soldered.....	85
Black steel pipe.....	177	Boom lifts, rental.....	420
assemblies.....	176	Booster heaters.....	25
Blowers, centrifugal.....	324	Bore holes, geothermal.....	317
Boiler		Bowling alleys, HVAC estimates.....	437
blowdown.....	203	Branch pipe and fittings, sprinkler...	182
burners.....	195	Brazed joint pipe	
stack.....	203	Type K copper.....	33
trim.....	204	Type L copper.....	53
Boiler connections.....	190	Type M copper.....	70
boiler pumps.....	205	Bucket steam trap.....	126
Boilers		Budget estimating.....	435
biomass fired.....	319-320	Buildings, HVAC estimates.....	437
pulse type.....	322	Burners, dual fuel.....	195
removal.....	425	Bushings	
steam heating.....	189	ABS.....	152
Boilers, commercial		PVC, DWV.....	156
accessories.....	204	PVC, Schedule 40.....	94
adjusting.....	198	PVC, Schedule 80.....	104
cast iron.....	185	Type K copper, brazed.....	38
chemical feed pump.....	202	Type K copper, soldered.....	48
combustion controls.....	197-198	Type L copper, brazed.....	57
combustion train.....	192	Type L copper, soldered.....	65
components.....	204	Type M copper, brazed.....	74
deaerator/condenser.....	201	Type M copper, soldered.....	82
electrical service.....	196	Butterfly valves	
feedwater pumps.....	197	pipe and plumbing specialty.....	127
firebox.....	187	PVC, Schedule 40.....	96
firetube.....	186-187	PVC, Schedule 80.....	106
fuel train piping.....	193-194	Schedule 10 steel, roll-grooved....	277
packaged, feedwater systems.....	202	Schedule 40 steel, cut-grooved....	283
pumping unit.....	201	Schedule 40 steel, roll-grooved....	270
refractory.....	197	Schedule 40 steel, threaded.....	230
stacks.....	203	Schedule 40 steel, welded ..	219-220
water softening systems.....	198	Schedule 80 steel, threaded..	251-252
watertube.....	188	Schedule 80 steel, welded.....	243
Boilers, gas fired		Type K copper, brazed.....	39
cast iron.....	189	Type K copper, soldered.....	50
steel.....	188	Type K & L copper, roll grooved ...	90
Bolt and gasket sets		Type L copper, brazed.....	58
pipe and plumbing specialty.....	122	Type L copper, soldered.....	66
polypropylene pipe.....	167	Type M copper, brazed.....	75
PVC, Schedule 40.....	99	Type M copper, soldered.....	83
PVC, Schedule 80.....	109		
Schedule 10 steel, roll-grooved....	279	<b>C</b>	
Schedule 40 steel, cut-grooved....	284	Calcium silicate pipe insulation.....	399
Schedule 40 steel, roll-grooved....	271	California Code, 2010.....	199
Schedule 40 steel, threaded.....	232	Can washers, installation costs.....	435
Schedule 40 steel, welded.....	222	Caps	
Schedule 80 steel, threaded.....	253	cast iron, no-hub.....	139
Schedule 80 steel, welded.....	245	cast iron, threaded.....	181
Schedule 160 steel, full face.....	264	CPVC sprinkler pipe.....	184
Schedule 160 steel, ring face.....	264	PE-AL pipe.....	114, 117
Type K copper, brazed.....	41	PEX-AL pipe.....	114, 117
Type K copper, soldered.....	52	PVC sewer, bell & spigot.....	163
Type L copper, brazed.....	60	PVC, Schedule 40.....	95
Type L copper, soldered.....	68	PVC, Schedule 80.....	105
		roll grooved, Victaulic.....	178
		Schedule 10 steel, roll-grooved....	276
		Schedule 40 steel, cut-grooved....	282
		Schedule 40 steel, roll-grooved....	269
		Schedule 40 steel, threaded.....	226
		Schedule 40 steel, welded.....	217
		Schedule 80 steel, threaded.....	250
		Schedule 80 steel, welded.....	241
		Schedule 160 steel, welded.....	261
		Type K copper, brazed.....	38
		Type K copper, soldered.....	48
		Type L copper, brazed.....	57
		Type L copper, soldered.....	65
		Type M copper, brazed.....	74
		Type M copper, soldered.....	82
		Carbon steel fittings.....	214-265
		Carbon steel pipe	
		Schedule 40.....	180
		Schedule 80.....	238
		Cast iron class 150.....	412
		Cast iron DWV pipe, hub & spigot...	141
		1/16 bend.....	142
		1/8 bend.....	141
		1/4 bend.....	141
		bends.....	142
		closet flanges.....	142
		combinations.....	143
		gaskets.....	145
		hanger assemblies.....	145
		P-traps.....	142
		reducers.....	144
		riser clamps.....	145
		sanitary tees.....	142
		tees.....	142
		wyes.....	143-144
		Cast iron DWV pipe, mechanical	
		joint.....	135
		Cast iron DWV pipe, no-hub.....	135
		1/8 bend.....	135-136
		1/4 bend.....	136
		caps.....	139
		closet bends.....	136
		closet flanges.....	136
		combinations.....	138
		couplings.....	139
		crosses.....	139
		hanger assemblies.....	140
		horizontal assembly.....	135
		P-traps.....	136
		reducers.....	139
		riser clamps.....	140
		tees.....	138-139
		wyes.....	136-138
		Cast iron sprinkler pipe fittings	
		cap.....	181
		couplings.....	181
		cross.....	181
		ells.....	180
		plugs.....	181

reducers.....	180	Closed loop heat pump .....	306	Computer rooms, HVAC estimates ...	437
reducing tee.....	180	Close-out items .....	421	Condenser units .....	205
Ceiling diffusers.....	334-335	Closet bends, ABS, DWV pipe.....	150	Condenser water systems	
Central air space heater,		Closet flanges		Schedule 40 steel, cut-grooved....	280
biomass fired.....	321	ABS, DWV pipe .....	150	Schedule 40 steel, roll-grooved....	266
Central dehumidification.....	300	cast iron, hub & spigot.....	142	Condensing units, air cooled.....	212
Centrifugal blowers.....	324	cast iron, no-hub.....	136	Condominiums, HVAC estimates....	437
Centrifugal fans, air balancing.....	403	copper, DWV, soldered .....	147	Configurable controller .....	338
Centrifugal pumps, HVAC .....	206	PVC, DWV.....	155-156	Connections	
Centrifugal water-cooled chiller.....	211	Clothes dryers, exhaust.....	327	air handling unit, HVAC .....	297-298
Ceramic heater .....	304	Cocktail lounges, HVAC estimates...437		continuous waste.....	26
Chain hoists, rental.....	420	Coil connection, air handling		fire department .....	174
Change estimates .....	438-448	unit.....	297-298	flexible duct.....	343
change order log .....	443	Coil, duct mounted, removal .....	429	hot and cold water supply .....	26
example .....	439	Coils, reheat, HVAC .....	209	indirect waste.....	26
summary .....	442, 446	Cold water connections.....	26	kitchen equipment .....	26
take-off.....	440, 444	Collars, galvanized steel .....	343	Siamese.....	174
worksheet .....	441, 445	Combinations		water heaters.....	21
Check valves.....	171	ABS .....	151	Connectors, pipe .....	123
Chemical feed pump, boiler .....	202	cast iron, hub & spigot.....	143	flexible .....	124
Chemical feed system .....	202	cast iron, no-hub.....	138	Construction schedule.....	453-455
Chemical systems		copper, DWV, soldered .....	147	Contents .....	3
polypropylene, DWV.....	164	polypropylene pipe .....	165	Continuous waste connections.....	26
PVC, Schedule 40 .....	91	Combustion controls, boiler.....	197-198	Control modules, pollution.....	199
PVC, Schedule 80 .....	101	Combustion monitoring .....	205	Control valves	
Chilled water systems		Combustion train, boiler .....	192	2 way .....	405-406
Schedule 10 steel, roll-grooved...273		Come-alongs, rental.....	420	3 way .....	405-406
Schedule 40 steel, cut-grooved...280		Commercial boilers.....	186-189	electric .....	405
Schedule 40 steel, roll-grooved...266		combustion trains .....	192	pipe and plumbing specialty ...	132-133
Schedule 40 steel, threaded.....223		components and accessories.....204		pneumatic .....	406
Schedule 80 steel, threaded.....247		connections .....	190	PVC, Schedule 40 .....	99
Type K copper, brazed.....	33	Commercial fans and blowers.....	324	PVC, Schedule 80 .....	109
Type K copper, soldered .....	43	Commercial fixture rough-ins .....	31	Schedule 10 steel, roll-grooved...278	
Type L copper, brazed .....	53	group .....	32	Schedule 40 steel, cut-grooved...284	
Type L copper, soldered.....	61	Commercial water heaters .....	19, 20	Schedule 40 steel, roll-grooved...271	
Type M copper, brazed .....	70	Compaction, trenching .....	418	Schedule 40 steel, threaded.....231	
Type M copper, soldered.....	80	Compactors, rental.....	420	Schedule 40 steel, welded .....	221
Chillers		Companion flanges		Schedule 80 steel, threaded.....253	
centrifugal.....	211	150 pound, threaded .....	122	Schedule 80 steel, welded ...	244-245
drinking fountain .....	30	300 pound, threaded .....	122	Schedule 160 steel, flanged... 263-264	
reciprocating .....	211	PVC .....	122	Schedule 160 steel, threaded.....263	
removal.....	426	PVC, Schedule 40 .....	99	Type K copper, brazed .....	41
water cooled, connection.....211		PVC, Schedule 80 .....	109	Type K copper, soldered .....	51
Chlorinated polyvinyl chloride pipe...183		Schedule 40 steel, threaded.....232		Type L copper, brazed .....	60
Churches, HVAC estimates.....	437	Type K copper, brazed.....	41	Type L copper, soldered.....	68
Circuit balance valves .....	127	Type K copper, soldered .....	51	Type M copper, brazed .....	77
Circulating pumps		Type L copper, brazed .....	60	Type M copper, soldered.....	85
all bronze .....	120	Type L copper, soldered.....	68	Controllers .....	338
iron body.....	121	Type M copper, brazed .....	77	Controls	
Clarifications.....	8	Type M copper, soldered.....	85	boiler.....	203
Classrooms, HVAC estimates .....	437	welding type.....	121	HVAC.....	404
Cleanouts		Composite pipe .....	111	Cooling systems, residential.....	286
ABS .....	152	compression fittings.....	116	Cooling towers	
ABS/PVC .....	169	compression joint fittings.....	117	connection assembly.....	213
copper, DWV, soldered .....	147	compression joints.....	116	demolition .....	427
end-of-line.....	169	crimped joint .....	111	forced draft .....	213
floor.....	169	crimped joint fittings.....	111-112	galvanized steel.....	212
installation costs .....	435	Compressed air systems		induced draft.....	212
PVC, DWV.....	157	Type K copper, brazed.....	33	removal.....	427
wall .....	169	Type L copper, brazed .....	53	Cooling units, variable volume .....	337

Copper fittings, roll grooved .....	89	thermometers with wells .....	52	Copper pipe, Type M soldered....	78-79
Copper pipe .....	89	unions .....	48	adapters .....	81
ball valve, press fit .....	88	valves .....	49-51	bolt and gasket sets .....	85
coupling, press fit .....	86	Copper pipe, Type K & L .....	89-90	bushings .....	82
ells, press fit .....	86	coupling .....	90	caps .....	82
female adapter, press fit .....	88	ells .....	89	companion flanges .....	85
male adapter, press fit .....	88	flange adapter .....	90	couplings .....	82
tee, press fit .....	87	reducers .....	90	ells .....	79-80
tee, reducing, press fit .....	87	roll grooved .....	89	maximum working pressure .....	78
union, press fit .....	87	tees .....	89	pressure gauges .....	85
Copper pipe, DWV, soldered .....	146	valves .....	90	reducers .....	81
1/8 bend .....	146	Copper pipe, Type L brazed .....	53-54	strainers .....	84
1/4 bend .....	147	adapters .....	56	tees .....	80
adapters .....	148	bolt and gasket sets .....	60	thermometers with wells .....	85
assembly with riser .....	146	bushings .....	57	unions .....	82
cleanouts .....	147	caps .....	57	valves .....	83-85
closet flanges .....	147	companion flanges .....	60	Copper piping, removal .....	430
combinations .....	147	couplings .....	57	Correction factors .....	6
couplings .....	148	ells .....	54-55	Countertop sinks/lavatories .....	28
crosses .....	147	pressure gauges .....	60	Couplings	
hanger assemblies .....	149	reducers .....	56	ABS .....	153
horizontal assemblies .....	146	strainers .....	59	cast iron, no-hub .....	139
P-traps .....	147	tees .....	55	cast iron, threaded .....	181
reducers .....	148	thermometers with wells .....	60	copper, DWV, soldered .....	148
riser clamps .....	149	unions .....	57	copper, press fit .....	86
tees .....	147	valves .....	58-60	CPVC sprinkler pipe .....	183
test caps .....	148	Copper pipe, Type L soldered....	61-62	galvanized steel spiral duct .....	359
test tees .....	148	adapters .....	64	PE-AL pipe .....	112-113, 117
wyes .....	147	bolt and gasket sets .....	68	PEX-AL pipe .....	113, 117
Copper pipe, Type K brazed .....	33-34	bushings .....	65	polypropylene pipe .....	166
adapters .....	37	caps .....	65	PVC, DWV .....	156
bolt and gasket sets .....	41	companion flanges .....	68	PVC, Schedule 40 .....	95
bushings .....	38	couplings .....	65	PVC, Schedule 80 .....	105
caps .....	38	ells .....	62-63	PVC sewer, bell & spigot .....	160
companion flanges .....	41	hanger assemblies .....	69	roll grooved, Victaulic .....	179
couplings .....	38	maximum working pressure .....	61	Schedule 5 steel, pressfit .....	235-236
ells .....	34-35	pressure gauges .....	68	Schedule 10 steel, roll-grooved .....	276
hanger assemblies .....	42	reducers .....	64	Schedule 40 steel, cut-grooved .....	282
pressure gauges .....	41	riser clamps .....	69	Schedule 40 steel, roll-grooved .....	269
reducers .....	37	strainers .....	67	Schedule 40 steel, threaded .....	226
riser clamp .....	42	tees .....	63	Schedule 80 steel, threaded .....	251
strainers .....	40	thermometers with wells .....	68	Type K copper, brazed .....	38
tees .....	35-36	unions .....	65	Type K copper, soldered .....	49
thermometers with wells .....	41	valves .....	66-68	Type K & L copper, roll grooved .....	90
unions .....	38	Copper pipe, Type M brazed .....	70-71	Type L copper, brazed .....	57
valves .....	39-41	adapters .....	73	Type L copper, soldered .....	65
Copper pipe, Type K soldered ....	43-44	bolt and gasket sets .....	77	Type M copper, brazed .....	74
adapters .....	47-48	bushings .....	74	Type M copper, soldered .....	82
bolt and gasket sets .....	52	caps .....	74	CPVC sprinkler pipe .....	183
bushings .....	48	companion flanges .....	77	adapters .....	184
caps .....	48	couplings .....	74	cap .....	184
companion flanges .....	51	ells .....	71	coupling .....	183
couplings .....	49	maximum working pressure .....	70	elbows .....	183
ells .....	44-45	pressure gauges .....	77	fittings .....	184
hanger assemblies .....	52	reducers .....	73	flange .....	184
pressure gauges .....	52	strainers .....	76	head adapter .....	184
reducers .....	47	tees .....	72	reducing tees .....	183
riser clamps .....	52	thermometers with wells .....	77	tees .....	183
strainers .....	51	unions .....	74	Craft codes .....	7
tees .....	45-46	valves .....	75-77	Craft@hrs .....	5

Cranes, rental.....	420	removal.....	432	CPVC sprinkler.....	183
Crew composition.....	7	Drinking water tank.....	415-416	Electric water heaters.....	19
Crimp rings		Drops and tees, ductwork .....	391-393	Electrical service for boilers .....	196
PE-AL pipe .....	115, 118	Dry valves.....	171	Ells	
PEX-AL pipe .....	115, 118	Dryers, exhaust.....	327	cast iron, threaded.....	180
Croll-Reynolds.....	199	Dual-fuel burners.....	195	copper, press fit.....	86
Cross linked PEX-AL.....	111	Duct insulation		PE-AL pipe .....	111-112, 116-117
Cross linked Polyethylene-		calcium silicate .....	399	PEX-AL pipe.....	111-112, 116-117
Aluminum pipe .....	116	fiberglass .....	401	PVC, DWV.....	154
removal.....	434	removal.....	434	PVC, Schedule 40.....	92
Crosses		Duct lining		PVC, Schedule 80.....	102-103
cast iron, no-hub.....	139	calcium silicate .....	399	Schedule 5 steel, pressfit .....	234-235
cast iron, threaded.....	181	fiberglass .....	401	Schedule 10 steel, roll-grooved....	274
copper, DWV, soldered .....	147	Duct markers.....	421	Schedule 40 steel, cut-grooved....	280
Schedule 40 steel, threaded.....	225	Ductwork		Schedule 40 steel, roll-grooved....	267
Schedule 80 steel, threaded.....	250	correction factors.....	340	Schedule 40 steel, threaded.....	224
		demolition .....	422	Schedule 40 steel, welded .....	215
		removal.....	422	Schedule 80 steel, threaded.....	248
		Ductwork specialties		Schedule 80 steel, welded .....	238
<b>D</b>		collars.....	343	Schedule 160 steel,	
Daily rental, equipment.....	420	connections .....	343	threaded .....	257-258
Dampers		dampers.....	339-340	Schedule 160 steel, welded ...	257-258
actuator.....	404	flexible connections .....	343	Type K copper, brazed .....	34-35
correction factors .....	340	turning vanes .....	342	Type K copper, soldered .....	44-45
fire.....	340	Ductwork, fiberglass		Type K & L copper, roll grooved ...	89
fusible plug .....	341	fabrication labor .....	395	Type L copper, brazed .....	54-55
rectangular.....	339	installation costs .....	396	Type L copper, soldered.....	62-63
round .....	339	vinyl cover.....	396	Type M copper, brazed .....	71
Deaerator/condenser, boiler.....	201	Ductwork, galvanized steel		Type M copper, soldered.....	79-80
Deck drains, installation costs.....	435	per pound installed .....	346-347	Emissions reduction module .....	199
Deep well jet pump.....	313	rectangular.....	380	Emissions sensing.....	205
dehumidification.....	300	rectangular 20 gauge .....	378-380	Energy recovery	
Dehumidifiers.....	291-292	rectangular 22 gauge .....	373-377	ventilators .....	291-292
Demolition.....	422	rectangular 24 gauge .....	371-373	wheel .....	301
Department stores, HVAC		rectangular 26 gauge .....	369-370	Engraved nameplates .....	421
estimates .....	437	rectangular fittings .....	381-393	Enthalpy energy and heat recovery...301	
Dielectric unions .....	38, 122	round fittings.....	394	Equipment	
Diffusers		spiral .....	356-357	nameplates .....	421
air balancing .....	402	spiral fittings.....	358-368	plumbing.....	19
ceiling .....	334-335	DWV pipe		rental costs .....	420
removal.....	423	ABS .....	150	Equipment costs.....	7
Dishwashers.....	25	cast iron .....	135	Estimate detail sheet.....	16
Disinfection unit.....	25	cast iron, hub & spigot.....	141	Estimates, budget.....	435
Disposals, garbage.....	25	copper.....	146	Estimating	
Domestic water iron filter.....	23	polypropylene .....	164	accuracy .....	8
Domestic water softeners.....	22-24	polypropylene heat-fused .....	164	guidelines .....	13
Doors.....	121	PVC .....	154	Exclusions .....	8
Double check detector valves .....	171			Exhaust.....	327
Downblast ventilation .....	329			clothes dryer.....	327
Drain, waste, vent pipe				fans.....	325-329
cast iron, hub & spigot.....	141			wall hood .....	327
cast iron, no-hub.....	135	<b>E</b>		Exhauster arrays .....	330
copper.....	146	EDPM valves.....	97, 107	Exhausters.....	329
polypropylene .....	164	Elastomeric gaskets .....	159	Expansion tanks .....	123
PVC .....	154	Elastomeric pipe insulation.....	400		
Drains.....	168	Elbows, ductwork			
Drawings, as-built.....	421	galvanized steel spiral duct .....	358		
Drilling wells .....	316	rectangular, galvanized steel... 381-390			
Drinking fountains.....	30	round, galvanized steel .....	394		
disconnect .....	433	Elbows, pipe			
refrigerated .....	30	black steel.....	177-178		
				<b>F</b>	
				F.O.B. ....	9
				Fabrication, fiberglass ductwork.....	395



Fan coil units		Fittings		Floor sinks .....	30, 168
air balancing .....	403	ductwork .....	359	estimating .....	435
HVAC equipment .....	208	roll grooved .....	89	Flues, water heater .....	21
Fan coils .....	427	Fittings, pipe		Foot valve .....	314
Fan controls .....	327	copper, DWV, soldered .....	146	Forced air heating, residential .....	287
Fans		expansion tank .....	123	Forced-draft cooling tower .....	213
attic .....	326	M.I., 150 pound .....	224	Forklifts, rental .....	420
bathroom .....	326-328	malleable iron, Schedule 40 .....	266	Forms and letters .....	438
ceiling exhaust .....	326-327	polypropylene .....	164	Fringe benefits .....	6
ceiling mounted .....	326	PVC, DWV .....	154	Front-end loaders, rental .....	420
centrifugal air foil .....	324	PVC sewer, bell & spigot .....	159	Fuel train piping .....	193-194
centrifugal utility .....	324	PVC, Schedule 40 .....	92	Fume hoods, air balancing .....	403
commercial .....	326	PVC, Schedule 80 .....	101-102	Furnace removal .....	425
exhaust .....	326, 328-329	Schedule 10 steel, roll-grooved .....	274	Furnaces, residential .....	299
exhaust, roof .....	325	Schedule 40 steel, cut-grooved .....	280	high efficiency .....	299
humidistat .....	327	Schedule 40 steel, roll-grooved .....	267	wall .....	300
kitchen .....	327	Schedule 40 steel, threaded .....	224	with A/C .....	299
roof .....	326	Schedule 40 steel, welded .....	215	Fusible plug dampers .....	341
room ventilation .....	326	Schedule 80 steel, threaded .....	248		
speed controller .....	327	Type K copper, brazed .....	42		
thru-wall .....	326	Type L copper, brazed .....	54	<b>G</b>	
timer .....	327	Type L copper, soldered .....	62	Galvanized steel collars .....	343
tube-axial .....	325	Type M copper, brazed .....	71	Galvanized steel cooling tower .....	212
vane-axial .....	324	Type M copper, soldered .....	79	Galvanized steel ductwork	
ventilation .....	326-327	Fixtures		installation costs .....	345
wall exhaust .....	326	bathroom .....	28	per pound installed .....	346-347
wall mounted .....	326	disconnect .....	433	rectangular .....	369-380
washroom .....	326-327	estimating costs .....	435	rectangular 20 gauge .....	377-380
Feedwater pumps, boiler .....	197	removal .....	432	rectangular 22 gauge .....	373-377
feedwater systems .....	205	Flange adapter, Type K & L		rectangular 24 gauge .....	371-373
Fiberglass		copper, roll grooved .....	90	rectangular 26 gauge .....	370
blanket .....	401	Flanges		rectangular fittings .....	381-393
ductwork .....	396	CPVC sprinkler pipe .....	184	round .....	394
pipe insulation .....	397-398	polypropylene pipe .....	167	round elbow .....	394
pressure tank .....	23	roll grooved, Victaulic .....	179	round snap-lock .....	394
rigid board .....	401	Schedule 10 steel, roll-grooved .....	276	spiral .....	356-357
tank .....	24, 415	Schedule 40 steel, cut-grooved .....	282	spiral coupling .....	359
Filter, iron .....	24	Schedule 40 steel, roll-grooved .....	269	spiral crosses .....	366-368
Fire dampers .....	340	Schedule 40 steel, threaded .....	232	spiral elbows .....	358
Fire department connection .....	174	Schedule 40 steel, welded .....	218	spiral tees .....	360-365
Fire extinguisher .....	175	Schedule 80 steel, threaded .....	253	Galvanized steel pipe sleeves .....	153
Fire extinguishing systems .....	322	Schedule 80 steel, welded .....	242	Garbage disposals .....	25
Fire hydrant .....	175	Schedule 160 steel, slip on .....	262	Gas furnaces	
Fire protection		Schedule 160 steel, weld neck .....	262	high efficiency .....	299
CPVC sprinkler pipe .....	183	Flanges, companion		residential .....	299
fire hose cabinets .....	173	150 pound, threaded .....	122	wall .....	300
plastic sprinkler pipe .....	183	150 pound, welding type .....	121	with A/C .....	299
pumps .....	174	300 pound, threaded .....	122	Gas heaters .....	303
Siamese connections .....	174	PVC .....	122	Gas trim connections .....	26
sprinkler fittings .....	177-181	Flashing		Gas valves .....	133
sprinkler heads .....	172	pipe .....	167	Gas water heaters .....	19-20
sprinkler pipe .....	176-177	roof .....	123, 153, 158	tankless .....	20
steel pipe nipples .....	182	Flat panel water heater .....	323	Gaskets	
switches .....	172	Flexible connections, ductwork .....	343	cast iron, hub & spigot .....	145
valves .....	171	Flexible fiberglass duct .....	396	elastomeric .....	159
Fire pumps .....	174	Flexible pipe connectors .....	124	Gate valves	
Firebox boilers .....	187	Floor drains .....	168	pipe and plumbing specialty .....	129-130
Fire-rated doors .....	121	estimating .....	435	PVC, Schedule 40 .....	96
Firetube boilers .....	186-187				

PVC, Schedule 80.....106	Schedule 10 steel, roll-grooved....279	Help.....5
Schedule 10 steel, roll-grooved....276	Schedule 40 steel, cut-grooved....285	High rise offices, HVAC estimates ...437
Schedule 40 steel, cut-grooved....283	Schedule 40 steel, roll-grooved....272	Holding tank ..... 415-416
Schedule 40 steel, roll-grooved....269	Schedule 40 steel, threaded.....232	Hood, duct kit .....327
Schedule 40 steel, threaded... 229-230	Schedule 40 steel, welded .....222	Hooks, pipe .....125
Schedule 40 steel, welded .....219	Schedule 80 steel, threaded.....254	Hose bibbs .....133
Schedule 80 steel, threaded.....251	Schedule 80 steel, welded .....246	Hot and cold water connections.....26
Schedule 80 steel, welded .....242	Schedule 160 steel.....265	Hot water boilers
Schedule 160 steel, flanged... 262-263	Type K copper, brazed .....42	biomass fired ..... 319-320
Type K copper, brazed.....39	Type K copper, soldered .....52	connections, HVAC ..... 190
Type K copper, soldered .....49	Type L copper, soldered.....69	gas fired..... 185-187
Type L copper, brazed .....58	Hangers, pipe .....124	gas fired, cast iron ..... 189
Type L copper, soldered.....66	PE-AL .....115, 118	gas fired, steel .....188
Type M copper, brazed .....75	PEX-AL.....115, 118	high pressure.....188
Type M copper, soldered.....83	steel band .....124	oil fired .....187
Geothermal	Hard water softener..... 22-24	Hot water reheat coils .....209
bore holes.....317	Head adapter, CPVC.....184	Hot water softener.....24
heat pump..... 306-308	Headers, PEX-AL pipe .....114	Hot water systems
wells.....316	Heads, sprinkler .....172	piping .....214
Globe valves	Heat/cool thermostat .....405	Schedule 40 steel, cut-grooved....280
pipe and plumbing specialty... 130-131	Heat exchangers	Schedule 40 steel, roll-grooved....266
PVC, Schedule 40 .....96	demolition .....429	Type K copper, brazed .....33
PVC, Schedule 80 .....106	HVAC.....207	Type K copper, soldered .....43
Schedule 10 steel, roll-grooved....277	removal.....429	Type L copper, brazed .....53
Schedule 40 steel, cut-grooved....283	Heat pumps ..... 307-311	Type L copper, soldered.....61
Schedule 40 steel, roll-grooved....270	accessories .....312	Type M copper, brazed .....70
Schedule 40 steel, threaded.....230	air to air .....309	Type M copper, soldered.....78
Schedule 40 steel, welded .....219	demolition .....428	Hot water tank
Schedule 80 steel, threaded.....251	geothermal.....306	disconnect .....433
Schedule 80 steel, welded ... 242-243	removal.....428	removal.....432
Schedule 160 steel, flanged.....263	split system .....309	Hourly labor costs.....6
Type K copper, brazed.....39	supplemental electric heating	How to use this book.....5
Type K copper, soldered .....49	coil .....312	HRV (heat recovery
Type L copper, brazed .....58	thermostats .....312	ventilators)..... 291-292
Type L copper, soldered.....66	Heat reclaimers .....204	Hub & spigot C.I. pipe, DWV.....141
Type M copper, brazed .....75	Heat recovery ..... 203, 205, 301	Humidistat control.....327
Type M copper, soldered.....83	Heat recovery systems	HVAC
Grease and oil interceptors.....25	continuous blowdown .....202	boiler connections.....190
Green sand filter.....23	stack waste.....199	controls .....404
Greywater tank .....417	Heat recovery ventilators.....292	demolition .....422
Grilles	Heat transfer equipment.....210	HVAC balancing
air balancing .....403	Heat-A-Lamp®.....329	air.....403
removal.....423	Heaters	wet.....404
return air .....333	bathroom .....328	HVAC equipment
Ground source heat pump .....306	biomass fired .....321	air conditioning units.....288
	ceramic .....304	air handling equipment .....331
	commercial .....304	air handling units ..... 289-290
	gas fired.....304	boilers ..... 185-189
	infrared .....304	centrifugal blowers.....324
	infrared bulb.....328	connections, air handling
	infrared tube .....304	unit..... 297-298
	residential furnaces .....299	fan coil units .....208
	resistance .....329	heat exchangers .....207
	unit.....303	heat transfer equipment .....210
	Heat-fused joint pipe,	pumps.....206
	polypropylene .....164	reheat coils .....209
	Heating systems.....287	unit heaters.....210
	estimating .....435	variable-air volume units .....337
	residential .....287	
<b>H</b>		
Hair and lint interceptors .....25		
Hanger assemblies		
ABS .....153		
cast iron, hub & spigot.....145		
cast iron, no-hub.....140		
copper, DWV, soldered .....149		
polypropylene pipe .....167		
PVC, DWV .....157		
PVC, Schedule 40 .....100		
PVC, Schedule 80 .....110		



HVAC systems  
 Type K copper, brazed .....33  
 Type K copper, soldered .....43  
 Type L copper, brazed .....53  
 Type L copper, soldered.....61  
 Type M copper, brazed .....70  
 Type M copper, soldered.....78  
 Hydrant, fire .....175  
 Hydraulic benders, rental .....420

**I**

Indicator post.....175  
 Indirect waste connections .....26  
 Indirect water heater.....203  
 Induced-draft cooling tower .....212  
 Infrared  
 bulb heater.....328  
 heater .....304  
 tube heater .....304  
 Injector.....314  
 Installation costs, ductwork .....396  
 Instructing, operating personnel.....421  
 Instructions for this book .....5  
 Insulation, pipe  
 calcium silicate .....399  
 elastomeric .....400  
 fiberglass ..... 397-398  
 Insulation removal .....434  
 Insurance.....6  
 Interceptors.....25  
 Iron filter ..... 23-24  
 accessories.....23  
 Iron removal .....23  
 Irrigation systems  
 PVC, Schedule 40 .....91  
 PVC, Schedule 80 .....101

**J**

Jet pump.....313

**K**

Kitchen equipment.....25  
 connections .....26  
 Kitchen fixtures  
 tailpiece connections .....26  
 trap connections .....26  
 Kitchen sinks .....29  
 disconnect .....433

**L**

Labor costs.....6  
 Laboratories, HVAC estimates .....437  
 Laboratory DWV pipe systems.....164

Laundry sinks .....29  
 disconnect .....433  
 Lavatories .....28  
 estimating .....435  
 Lead flashing ..... 123, 153, 158  
 LEED certification .... 185-186, 187-189,  
 .....286, 305, 308, 312, 319-320, 322  
 Letter of intent ..... 456-457  
 Libraries, HVAC estimates .....437  
 Line voltage thermostat .....405  
 Lined ductwork, installed ..... 346-347  
 Low voltage thermostat .....405

**M**

Makeup air units .....336  
 Malleable iron fittings  
 150 pound.....214  
 300 pound.....237  
 Schedule 10 steel pipe .....274  
 Schedule 40 steel, roll-grooved.....266  
 Manganese filters  
 green sand.....23  
 iron.....23  
 Manhours.....5  
 Manifolds, PEX-AL pipe .....114  
 Manufacturing plants, HVAC  
 estimates .....437  
 Markers, pipe and duct.....421  
 Markets, HVAC estimates .....437  
 Material costs .....7  
 Material pricing conditions.....9  
 Materials, Equipment, and  
 Tool form .....10  
 Maximum working pressures  
 Type K copper, brazed .....33  
 Type K copper, soldered .....43  
 Type L copper, brazed .....53  
 Type L copper, soldered.....61  
 Type M copper, brazed .....70  
 Type M copper, soldered.....78  
 Mechanical joint coupling .....139  
 Mechanical tee, roll grooved,  
 Victaulic.....179  
 Medical buildings, HVAC estimates..437  
 MET .....10  
 worksheet .....14  
 Miscellaneous tools  
 PE-AL pipe .....115, 118  
 PEX-AL pipe .....115, 118  
 MJ coupling .....139  
 Molded stone  
 mop sinks .....29  
 shower basins.....28  
 Monthly rental, equipment .....420  
 Mop sink, disconnect.....433  
 Motels, HVAC estimates .....437  
 Museums, HVAC estimates .....437

**N**

Nail clips  
 PE-AL pipe .....115, 118  
 PEX-AL pipe.....115, 118  
 Nameplates, equipment .....421  
 Nipples  
 Schedule 40 steel, threaded... 227-229  
 steel pipe, fire protection .....182  
 Non-taxable fringe benefits .....6  
 NPT pump, in-line..... 25, 120-121  
 Nursing homes, HVAC estimates....437

**O**

Office buildings, HVAC estimates ...437  
 Office trailers, rental .....420  
 Oil fuel train piping .....205  
 Old estimates .....12  
 Open loop heat pump..... 307-308  
 O-rings  
 PE-AL pipe .....115, 118  
 PEX-AL pipe .....115, 118  
 Overflow drains .....168  
 estimating .....435  
 Overhead and profit.....7

**P**

Packaged boiler feedwater  
 systems .....202  
 PE-AL pipe ..... 111-115  
 PEX-AL pipe..... 116-118  
 adapters.....113  
 brass fittings .....111  
 caps .....114, 117  
 compression brass fittings.....116  
 couplings ..... 112-113, 117  
 crimp rings.....115, 118  
 crimped brass fittings .....111  
 ells ..... 111-112, 116-117  
 hangers.....115, 118  
 miscellaneous tools .....115, 118  
 nail clips.....115, 118  
 O-rings.....115, 118  
 tees.....112, 117  
 valves .....114, 118  
 Pipe  
 connector..... 123-124  
 flashing ..... 123, 153, 158, 167  
 hangers.....124  
 hooks .....125  
 markers.....421  
 sleeves ..... 125, 153, 158, 167  
 sleeves, cut-grooved .....285  
 Pipe insulation  
 calcium silicate .....399  
 elastomeric .....400

fiberglass .....	397-398, 415	fixtures .....	32	Schedule 40 steel, roll-grooved.....	271
removal.....	434	specialties .....	134	Schedule 40 steel, threaded.....	232
Pipe machines, rental.....	420	Plumbing fixture		Schedule 40 steel, welded .....	222
Pipe sizes		disconnect .....	433	Schedule 80 steel, threaded.....	254
Type K copper, brazed.....	33	removal.....	432	Schedule 80 steel, welded .....	245
Type K copper, soldered .....	43	Pollution control modules .....	199	Type K copper, brazed .....	41
Type L copper, brazed .....	53	Pollution control stack retrofit ...	319, 321	Type K copper, soldered .....	52
Type L copper, soldered.....	61	Polyethylene sewage pit.....	417	Type L copper, brazed .....	60
Type M copper, brazed .....	70	Polyethylene sump pit .....	417	Type L copper, soldered.....	68
Type M copper, soldered.....	78	Polyethylene-aluminum pipe ...	111-116	Type M copper, brazed .....	77
Piping		Polypropylene DWV pipe .....	164	Type M copper, soldered.....	85
air handling unit coil.....	297-298	adapters.....	166	Pressure pump .....	174
cast iron .....	141	bends.....	164	Pressure reducing valves .....	133
class 110 DI, cement lined .....	411	bolt and gasket sets .....	167	Pressure switches .....	172, 314
class 150 cast iron.....	412	combinations .....	165	Pressure tank .....	23-24, 314
class 153 DI, cement lined .....	407	couplings .....	166	Pressure/temperature taps	
class 153 DI, double cement		fittings .....	164	Schedule 10 steel, roll-grooved....	279
lined.....	409	flanges .....	167	Schedule 40 steel, cut-grooved....	285
class 2400 or 3000 asbestos		hanger assemblies .....	167	Schedule 40 steel, roll-grooved....	272
cement.....	413	heat-fused joint pipe .....	164	Schedule 40 steel, threaded.....	232
copper.....	146	plugs .....	166	Schedule 40 steel, welded .....	222
CPVC sprinkler .....	183	P-traps .....	164	Schedule 80 steel, threaded.....	254
polypropylene .....	164	reducers.....	167	Schedule 80 steel, welded .....	245
PVC .....	154	riser clamps .....	167	Schedule 160 steel.....	264
PVC, DWV.....	154	tees.....	165	Price updates .....	5
Schedule 10 steel,		wyes .....	165-166	Pricing, HVAC systems .....	435
roll-grooved .....	273-274	Polyvinyl chloride pipe		Process systems	
Schedule 40 steel, cut-grooved....	280	Schedule 40.....	91	PVC, Schedule 40 .....	91-92
Schedule 40 steel, roll-grooved....	266	Schedule 80.....	101	PVC, Schedule 80 .....	101-102
Schedule 40 steel, threaded.....	223	Potable water storage tank .....	416	Project summary .....	12
Schedule 40 steel, welded .....	214	Potable water systems		Project summary worksheet.....	15
Schedule 80 steel, threaded.....	248	PVC, Schedule 40 .....	91	Proposal, preparing .....	13
Schedule 80 steel, welded ...	237-238	PVC, Schedule 80 .....	101	P-traps	
Piping, removal.....	430	Type K copper, brazed .....	33	ABS .....	151
Piping specialties.....	134	Type K copper, soldered .....	43	cast iron, hub & spigot.....	142
Piping systems		Type L copper, brazed .....	53	cast iron, no-hub.....	136
chilled water.....	214	Type L copper, soldered.....	61	copper, DWV, soldered .....	147
hot water.....	214	Type M copper, brazed .....	70	polypropylene pipe .....	164
recirculating water .....	246	Type M copper, soldered.....	78	PVC, DWV.....	156
Planter drains .....	168	Pressfit		Pulse type boilers .....	322
Plastic		ball valve, copper .....	88	Pumping unit for boilers .....	201
sewage pit .....	417	coupling, copper .....	86	Pumps	
sprinkler pipe .....	183	ells, copper .....	86	boiler.....	205
sump pit.....	417	female adapter, copper .....	88	centrifugal .....	206
tank.....	416	fittings .....	234	heat.....	306-308
Plug dampers, fusible.....	341	male adapter, copper .....	88	in-line .....	25
Plugs		tee, copper.....	87	in-line circulating.....	120-121
cast iron, threaded.....	181	tee, reducing, copper.....	87	removal.....	431
polypropylene pipe .....	166	Type O o-rings.....	234	submersible .....	313
PVC, Schedule 40 .....	95	union, copper.....	87	sump, installation costs .....	435
PVC, Schedule 80 .....	105	Pressure controller .....	338	well water.....	313
Schedule 40 steel, threaded.....	226	Pressure fiberglass tank.....	24	Purchase order.....	451-452
Schedule 80 steel, threaded.....	250	Pressure gauges		PVC	
Plumbing		dial-type .....	125	valves, EDPM.....	97, 107
budget estimates .....	435	PVC, Schedule 40 .....	100	valves, threaded .....	97, 107
equipment.....	26	PVC, Schedule 80 .....	109	valves, Tru-union.....	97, 107
fixture costs .....	435	Schedule 10 steel, roll-grooved....	279	valves, union type, solvent	
fixture rough-in.....	31-32	Schedule 40 steel, cut-grooved....	285	weld.....	98, 107

PVC, DWV pipe.....	154	1/4 bend.....	160	Type M copper, soldered.....	81
adapters.....	156	adapters.....	163	Reducing costs.....	9
bushings.....	156	caps.....	163	Reducing ells, Schedule 5 steel,	
cleanouts.....	157	couplings.....	160	pressfit.....	235
closet flanges.....	155-156	gasket joints.....	159	Reducing tees	
couplings.....	156	reducers.....	163	cast iron.....	180
ells.....	154	tees.....	162	CPVC sprinkler pipe.....	183
fittings.....	154	test plugs.....	163	roll grooved, Victaulic.....	178
hanger assemblies.....	157	wyes.....	160-162	Schedule 5 steel, pressfit.....	236
P-traps.....	156			Schedule 10 steel, roll-grooved.....	275
reducers.....	157			Schedule 40 steel, cut-grooved.....	281
riser clamps.....	157	<b>Q</b>		Schedule 40 steel, roll-grooved.....	268
solvent-weld joints.....	154	Quotation sheet.....	17	Schedule 40 steel, threaded.....	225
tees.....	155			Schedule 80 steel, threaded.....	249
wyes.....	155			Reducing valves, pressure.....	133
PVC, Schedule 40 pipe.....	92	<b>R</b>		Refractory, boiler.....	197
adapters.....	94	Rainwater systems, PVC.....	159	Refrigeration systems	
assembly.....	91	Reciprocating water-cooled chiller.....	211	Type K copper, brazed.....	33
bolt and gasket sets.....	99	Recirculating water systems.....	246	Type L copper, brazed.....	53
bushings.....	94	Record of telephone conversation.....	18	Registers	
caps.....	95	Recorder, digital.....	405	return.....	334
companion flange.....	99	Recording equipment.....	205	supply.....	333
control valves.....	99	Rectangular duct, galvanized		Reheat coils.....	209
couplings.....	95	steel.....	345, 380	Reheat units, variable volume.....	337
ells.....	92	Rectangular elbow, galvanized		Removal costs	
hanger assemblies.....	100	steel.....	390	air cooled condensers.....	426
plugs.....	95	Reducers		air handling units.....	424
pressure gauges.....	100	ABS.....	153	air mixing box.....	423
pressure/temperature taps.....	100	cast iron, hub & spigot.....	144	boilers.....	425
riser clamps.....	100	cast iron, no-hub.....	139	chillers.....	426
solvent-weld joints.....	91	cast iron, threaded.....	180	cooling towers.....	427
strainers.....	98-99	class 110 DI, cement lined.....	411	copper piping.....	430
tees.....	93	class 150 cast iron.....	412	diffusers.....	423
thermometers with wells.....	100	class 153 DI, cement lined.....	408	duct insulation.....	434
unions.....	95	class 153 DI, double cement		duct mounted coils.....	429
valves.....	96-99	lined.....	410	ductwork.....	422-423
PVC, Schedule 80 pipe.....	101-102	class 2400 or 3000 asbestos		fan coils.....	427
adapters.....	104	cement.....	414	furnaces.....	425
assembly.....	101-102	copper, DWV, soldered.....	148	grilles.....	423
bolt and gasket sets.....	109	galvanized steel spiral duct.....	359	heat exchangers.....	429
bushings.....	104	polypropylene pipe.....	167	heat pumps.....	428
caps.....	105	PVC.....	163	hot water tank.....	432
companion flanges.....	109	PVC, DWV.....	157	pipe insulation.....	434
couplings.....	105	roll grooved, Victaulic.....	178	plastic piping.....	430
ells.....	102-103	Schedule 10 steel, roll-grooved.....	275	plumbing fixtures.....	432
hanger assemblies.....	110	Schedule 40 steel, cut-grooved.....	282	pumps.....	431
plugs.....	105	Schedule 40 steel, roll-grooved.....	268	roof top unit.....	424
pressure gauges.....	109	Schedule 40 steel, threaded.....	225	steel piping.....	430
pressure/temperature taps.....	110	Schedule 40 steel, welded.....	217	unit heaters.....	428
riser clamps.....	110	Schedule 80 steel, threaded.....	249	valves.....	431
solvent-weld joints.....	101	Schedule 80 steel, welded... 240-241		Rental costs, equipment.....	420
strainers.....	108	Schedule 160 steel, welded... 260-261		Residences, HVAC estimates.....	437
tees.....	103	Type K copper, brazed.....	37	Residential fixture rough-ins.....	32
thermometers with wells.....	109	Type K copper, soldered.....	47	Residential furnaces.....	299-300
unions.....	105	Type K & L copper, roll grooved....	90	Residential water heaters.....	19-20
valves.....	106-109	Type L copper, brazed.....	56	Resistance heater.....	329
PVC sewer pipe, bell & spigot.....	159	Type L copper, soldered.....	64	Retail shops, HVAC estimates.....	437
1/16 bend.....	159	Type M copper, soldered.....	64	Retrofit pollution control stack... 319-321	
1/8 bend.....	159-160			Return air grilles.....	333

Return registers.....	334	Schedule 10 carbon steel pipe,	tees.....	267
Riser clamps		roll-grooved.....	thermometers with wells.....	271
ABS.....	153	adapters.....	valves.....	269-271
cast iron, hub & spigot.....	145	bolt and gasket sets.....	vertical assembly.....	266
cast iron, no-hub.....	140	caps.....	Schedule 40 carbon steel pipe,	
copper, DWV, soldered.....	149	couplings.....	threaded.....	224
pipe and plumbing specialty.....	125	ells.....	bolt and gasket sets.....	232
polypropylene pipe.....	167	flanges.....	caps.....	226
PVC, DWV.....	157	hanger assemblies.....	companion flanges.....	232
PVC, Schedule 40.....	100	horizontal assembly.....	control valves.....	231-232
PVC, Schedule 80.....	110	pressure gauges.....	couplings.....	226
Schedule 10 steel, roll-grooved.....	279	pressure/temperature taps.....	crosses.....	225
Schedule 40 steel, cut-grooved.....	285	reducers.....	ells.....	224
Schedule 40 steel, roll-grooved.....	272	reducing tees.....	fire protection.....	180
Schedule 40 steel, threaded.....	233	riser clamps.....	hanger assemblies.....	232
Schedule 40 steel, welded.....	222	strainers.....	horizontal assembly.....	223
Schedule 80 steel, threaded.....	254	tees.....	nipples.....	227-229
Schedule 80 steel, welded.....	246	thermometers with wells.....	plugs.....	226
Schedule 160 steel.....	265	valves.....	pressure gauges.....	232
Type K copper, brazed.....	42	vertical assembly.....	pressure/temperature taps.....	232
Type K copper, soldered.....	52	Schedule 40	reducers.....	225
Type L copper, soldered.....	69	threadolet.....	reducing tees.....	225
Rolairtrol type air separators.....	201	weldolet.....	riser clamps.....	233
Roll-grooved fittings.....	179	Schedule 40 carbon steel pipe.....	strainers.....	231
Roll-grooved joint, Schedule 40		Schedule 40 carbon steel pipe,	tees.....	224
carbon steel.....	266	cut grooved.....	thermometers with wells.....	232
Roof		adapters.....	unions.....	226
drains.....	168	bolt and gasket sets.....	valves.....	227, 229-231
exhaust fan.....	325	caps.....	vertical assembly.....	223
fans.....	326	couplings.....	Schedule 40 carbon steel pipe,	
flashing.....	123, 153, 158	ells.....	welded.....	214
Roof exhauster.....	326	flanges.....	bolt and gasket sets.....	222
Roof top unit, removal.....	424	hanger assemblies.....	caps.....	217-218
Rough-ins		pipe sleeves.....	companion flanges.....	218
commercial fixture.....	31	pressure gauges.....	ells.....	215
commercial group.....	32	pressure/temperature taps.....	pressure gauges.....	222
residential.....	32	reducers.....	pressure/hanger assemblies.....	222
Round galvanized steel ductwork.....	394	reducing tees.....	pressure/temperature tap.....	222
Roustabouts, rental.....	420	riser clamps.....	reducers.....	217
Run and branch, tees, galvanized		strainers.....	riser clamp.....	222
steel.....	365	tees.....	strainers.....	220-221
		thermometers with wells.....	tees.....	216
		valves.....	thermometers with wells.....	222
		283-284	threadolets.....	218
<b>S</b>		Schedule 40 carbon steel pipe,	valves.....	219-221
Saddle tee, roll grooved, Victaulic... 179		roll-grooved.....	vertical assembly.....	214
Safety, trenching.....	418	adapters.....	weldolets.....	218
Sandstone, trenching.....	418	bolt and gasket sets.....	Schedule 40 polypropylene pipe.....	164
Sanitary tees		caps.....	Schedule 40 PVC pipe.....	91-92
cast iron DWV pipe.....	142	couplings.....	Schedule 80	
polypropylene pipe.....	165	ells.....	PVC pipe.....	101
Schedule, construction.....	453-455	flanges.....	threadolet.....	134
Schedule 5 carbon steel pipe,		hanger assemblies.....	weldolet.....	134
pressfit.....	234	horizontal assembly.....	Schedule 80 carbon steel pipe,	
adapters.....	236	pressure gauges.....	threaded.....	247-248
couplings.....	235-236	pressure/temperature taps.....	bolt and gasket sets.....	253
ells.....	234-235	reducers.....	caps.....	250
reducing ells.....	235	reducing tees.....	couplings.....	251
reducing tees.....	236	riser clamps.....		
tees.....	236	strainers.....		



crosses .....	250	threadolets .....	262	Skip loaders, rental.....	420
ells .....	248	unions .....	260	Sleeves	
flanges .....	253	valves .....	262-264	galvanized steel pipe .....	153, 158
hanger assemblies .....	254	weldolets.....	261	polypropylene pipe .....	167
horizontal assembly.....	247	Schedule 80 PVC pipe.....	102	Slop sink, disconnect.....	433
plugs .....	250	Scissor-lifts, rental.....	420	Slope, trench .....	418
pressure gauges.....	254	Scotch marine firetube boilers...	186-187	Softener, water .....	22
pressure/temperature taps .....	254	Self-sticking markers .....	421	Software .....	338
reducers.....	249	Sensor		Solar water heater.....	323
reducing tees .....	249	CO2 .....	405	Solder, soft .....	33, 43
riser clamps .....	254	HVAC controls.....	404	Soldered joint fittings	
strainers.....	252-253	Septic tank.....	415	Type K copper .....	43
tees.....	249	Service sinks .....	29	Type L copper .....	61
thermometers with wells.....	254	estimating .....	435	Soldered joint pipe.....	43, 78
unions .....	250	Sewage lift tank.....	417	copper, DMV.....	146
valves .....	251-253	Sewage tank.....	415	Type K copper.....	43
vertical assembly.....	247	Sewer pipe, PVC bell & spigot.....	159	Type L copper .....	61
Schedule 80 carbon steel pipe,		Shale, trenching .....	418	Type M copper .....	78
welded.....	238	Shallow well water pump.....	313	Solenoid valves .....	204
bolt and gasket sets .....	245	Sheet metal .....	346-347	Solvent-weld joint pipe	
caps .....	241	Shoring, trench.....	418	PVC, DWV.....	154
ells .....	238	Shower stall		PVC, Schedule 40.....	91
flanges .....	242	disconnect .....	433	PVC, Schedule 80.....	101
hanger assemblies .....	246	removal.....	432	Specialties, piping and plumbing.....	134
horizontal assembly.....	237	Showers.....	28	Speed controller, fan .....	327
pressure gauges.....	245	estimating .....	435	Spin-ins, plain.....	343
pressure/temperature tap .....	245	Siamese connection.....	174	Spiral crosses, galvanized	
reducers.....	240-241	Silent check valves		steel.....	366-368
riser clamps .....	246	pipe and plumbing specialty .....	129	Spiral duct, galvanized	
strainers.....	244	PVC, Schedule 40 .....	98	steel.....	356-357, 366-368
tees.....	239-240	PVC, Schedule 80.....	108	Spiral tees, galvanized steel ...	363, 365
thermometers with wells.....	245	Schedule 10 steel, roll-grooved....	278	Sprinkler fittings.....	177-181
threadolets.....	242	Schedule 40 steel, cut-grooved....	284	Sprinkler heads .....	172
unions .....	241	Schedule 40 steel, roll-grooved....	270	Sprinkler systems	
valves .....	242-245	Schedule 40 steel, threaded.....	231	black steel pipe.....	176-177
vertical assembly.....	237	Schedule 40 steel, welded .....	220	branch pipe and fittings .....	182
weldolets.....	241	Schedule 80 steel, threaded.....	252	heads.....	172
Schedule 160 carbon steel pipe,		Schedule 80 steel, welded .....	244	per head costs.....	170
plain end.....	256	Type K copper, brazed .....	40	square foot costs .....	170
Schedule 160 carbon steel pipe,		Type K copper, soldered .....	50	switches.....	172
threaded .....	255	Type L copper, brazed .....	59	valves .....	171
ells .....	257-258	Type L copper, soldered.....	67	Square-foot costs, HVAC .....	435
horizontal assembly.....	255	Type M copper, brazed .....	76	Stack waste, heat recovery.....	199
tees.....	259	Type M copper, soldered.....	84	Stainless steel	
unions .....	260	Sinks.....	28-30	doors.....	121
vertical assembly.....	256	acrylic .....	29	sinks .....	29
Schedule 160 carbon steel pipe,		bar .....	29	Standard form subcontract.....	448
welded.....	255	cast iron .....	29	Steam boiler connections, HVAC....	190
bolt and gasket sets .....	264	countertop .....	28	Steam boilers	
caps .....	261	disconnect .....	433	biomass fired .....	320
ells .....	257-258	exam room.....	29	connections .....	190
flanges .....	262	kitchen.....	29	gas fired.....	185
hanger assemblies .....	265	laboratory.....	29	Steam heating boilers.....	189
horizontal assembly.....	255	laundry.....	29	Steam systems, piping .....	238
pressure gauges.....	264	medical .....	29	Steam traps .....	125, 204
pressure/temperature taps .....	264	molded stone.....	29	Steel collars.....	343
reducers.....	260-261	mop.....	29	Steel doors .....	121
riser clamps .....	265	removal.....	432	Steel ductwork,	
tees.....	259	slop .....	30	galvanized .....	356-357, 359
thermometers with wells.....	264	stainless steel.....	29	fittings .....	358

Steel pipe			
black	176-177	adapters	268
cooling systems	234	bolt and gasket sets	271
heating systems	234	caps	269
nipples, threaded	182, 229	couplings	269
pressfit system	234	ells	267
process applications	234	flanges	269
Steel pipe fittings, Schedule 40		hanger assemblies	272
steel, roll-grooved	266	pressure gauges	271
Steel pipe nipples, threaded	227-229	pressure/temperature taps	272
Steel pipe, Schedule 5 pressfit	234	reducers	268
adapters	236	reducing tees	268
couplings	235-236	riser clamps	272
ells	234-235	strainers	271
reducing ells	235	tees	267
reducing tees	236	thermometers with wells	271
tees	236	valves	269-271
Steel pipe, Schedule 10		Steel pipe, Schedule 40	
roll-grooved	273-274	threaded	224
adapters	275	ball valves	230
bolt and gasket sets	279	bolt and gasket sets	232
caps	276	butterfly valves	230
control valves	278	caps	226
couplings	276	companion flanges	232
ells	274	control valves	231
flanges	276	couplings	226
hanger assemblies	279	crosses	225
horizontal assembly	273	ells	224
pressure gauges	279	hanger assemblies	232
pressure/temperature taps	279	horizontal assembly	223
reducers	275	nipples	227-229
reducing tees	275	plugs	226
riser clamps	279	pressure gauges	232
strainers	278	pressure/temperature taps	232
tees	274	reducers	225
thermometers with wells	279	riser clamps	233
valves	276-278	silent check valves	231
vertical assembly	273	strainers	231
Steel pipe, Schedule 40		swing check valves	231
cut-grooved	280	tees	224-225
adapters	281	thermometers with wells	232
bolt and gasket sets	284	unions	226
caps	282	valves	229-230, 232
couplings	282	vertical assembly	223
ells	280	Steel pipe, Schedule 40	
flanges	282	welded	214-215
hanger assemblies	285	bolt and gasket sets	222
pipe sleeves	285	caps	217
pressure gauges	285	control valves	221
pressure/temperature taps	285	ells	215
reducers	282	flanges	218
reducing tees	281	hanger assemblies	222
riser clamps	285	pressure gauges	222
strainers	284	pressure/temperature tap	222
tees	281	reducers	217
thermometers with wells	285	riser clamp	222
valves	283-284	strainers	220-221
Steel pipe, Schedule 40		tees	216
roll-grooved	266	thermometers	222
		threadolets	218
		unions	218
		valves	219-221
		weldolets	218
		Steel pipe, Schedule 80	
		threaded	247-248
		ball valves	252
		bolt and gasket sets	253
		butterfly valves	251-252
		caps	250
		control valves	253
		couplings	251
		crosses	250
		ells	248
		flanges	253
		gate valves	251
		globe valves	251
		hanger assemblies	254
		plugs	250
		pressure gauges	254
		pressure/temperature taps	254
		reducers	249
		reducing tees	249
		riser clamps	254
		silent check valves	252
		strainers	252-253
		swing check valves	252
		tees	249
		thermometers with wells	254
		unions	250
		valves	253
		Steel pipe, Schedule 80	
		welded	237-238
		bolt and gasket sets	245
		butterfly valves	243
		caps	241
		control valves	244-245
		ells	238
		flanges	242
		gate valves	242
		globe valves	242-243
		hanger assemblies	246
		pressure gauges	245
		pressure/temperature tap	245
		reducers	240-241
		riser clamps	246
		silent check valves	244
		strainers	244
		swing check valves	243
		tees	239-240
		thermometers with wells	245
		threadolets	242
		unions	241
		valves	245
		weldolets	241
		Steel pipe, Schedule 160	256
		bolt and gasket sets	264
		ells	258
		hanger assemblies	265
		pressure gauges	264



pressure/temperature taps	264
riser clamps	265
thermometers with wells	264
Steel pipe, Schedule 160	
plain end	256
Steel pipe, Schedule 160	
threaded	256-260
ells	257-258
horizontal assembly	255
tees	259
unions	260
vertical assembly	256
Steel pipe, Schedule 160 welded	256
caps	261
ells	257-258
flanges	262
horizontal assembly	255
reducers	260-261
tees	259
threadolets	262
unions	260
valves	262-264
vertical assembly	256
weldolets	261
Steel piping, removal	430
Storage vans, rental	420
Stores, HVAC estimates	437
Strainers	
pipe and plumbing specialty	131-132
PVC, Schedule 40	98-99
PVC, Schedule 80	108
Schedule 10 steel, roll-grooved	278
Schedule 40 steel, cut-grooved	284
Schedule 40 steel, roll-grooved	271
Schedule 40 steel, threaded	231
Schedule 40 steel, welded	220-221
Schedule 80 steel,	
threaded	252-253
Schedule 80 steel, welded	244
Type K copper, brazed	40
Type K copper, soldered	51
Type L copper, brazed	59
Type L copper, soldered	67
Type M copper, brazed	76
Type M copper, soldered	84
Subcontract	
change order	450
forms	447
Submersible pump	313
Submittal data	458-459
Submittal index	460
Suction diffusers	120
Sump pit	417
Sump pumps, installation costs	435
Supermarkets, HVAC estimates	437
Supervision expense	6
Supervision valves	
flanged	170
grooved	171
Supply registers	333
Supports, wall bracket	124
Surplus materials	10
Swimming pool heat recovery ventilators	291
Swing check valves	
pipe and plumbing specialty	127-128
PVC, Schedule 40	98
PVC, Schedule 80	108
Schedule 10 steel, roll-grooved	277
Schedule 40 steel, cut-grooved	283
Schedule 40 steel, roll-grooved	270
Schedule 40 steel, threaded	231
Schedule 40 steel, welded	220
Schedule 80 steel, threaded	252
Schedule 80 steel, welded	243
Schedule 160 steel, flanged	263
Type K copper, brazed	40
Type K copper, soldered	50
Type L copper, brazed	59
Type L copper, soldered	67
Type M copper, brazed	76
Type M copper, soldered	84
Switches, sprinkler system	172

## T

Table of contents	3
Tables	
budget estimates	435
trenching costs	417-419
Tailpiece connections	26
Tank tee	314
Tankless water heaters	20, 203
Tanks	
above ground	416
buried	415-416
deep burial	415-416
drinking water	415-416
expansion	123
fiberglass	415
greywater	417
heat/cool	405
holding	415-416
line voltage	405
low voltage	405
plastic	416-417
polyethylene	416
septic	415-416
sewage	415
sewage lift	417
sewer	416
shallow burial	415-416
sump	417
swimming pool	291
water	416
Taxable fringe benefits	6
Taxes	6
Tee, reducing	
copper, press fit	87

## Tees

ABS	151-152
cast iron, hub & spigot	142
cast iron, no-hub	138-139
cast iron, threaded	180
class 110 DI, cement lined	411
class 150 cast iron	412
class 153 DI, cement lined	407
class 153 DI, double cement lined	410
class 2400 or 3000 asbestos cement	414
copper, DWV, soldered	147
copper, press fit	87
CPVC sprinkler pipe	183
PE-AL pipe	112, 117
PEX-AL pipe	112, 117
polypropylene pipe	165
PVC, DWV	155
PVC, Schedule 40	93
PVC, Schedule 80	103
PVC sewer, bell & spigot	162
roll grooved, Victaulic	178-179
Schedule 5 steel, pressfit	236
Schedule 10 steel, roll-grooved	274
Schedule 40 steel, cut-grooved	281
Schedule 40 steel, roll-grooved	267
Schedule 40 steel, threaded	224
Schedule 40 steel, welded	216
Schedule 80 steel, threaded	249
Schedule 80 steel, welded	239-240
Schedule 160 steel, threaded	259
Schedule 160 steel, welded	259
spiral, galvanized steel	360-365
Type K copper, brazed	35-36
Type K copper, soldered	45-46
Type K & L copper, roll grooved	89
Type L copper, brazed	55
Type L copper, soldered	63
Type M copper, brazed	72
Type M copper, soldered	80
with run and branch, galvanized steel	365
Terminal box controller	338
Terminal boxes, air balancing	402
Test caps	
ABS DWV	152
copper, DWV, soldered	148
Test plugs, PVC sewer, bell & spigot	163
Test tees, copper, DWV, soldered	148
Theaters, HVAC estimates	437
Thermometers with wells	
pipe and plumbing specialty	126
PVC, Schedule 40	100
PVC, Schedule 80	109
Schedule 10 steel, roll-grooved	279
Schedule 40 steel, cut-grooved	285
Schedule 40 steel, roll-grooved	271
Schedule 40 steel, threaded	232

Schedule 40 steel, welded .....	222	bolt and gasket sets .....	52	bushings .....	74
Schedule 80 steel, threaded.....	254	bushings .....	48	caps .....	74
Schedule 80 steel, welded .....	245	caps .....	48	couplings .....	74
Schedule 160 steel.....	264	companion flanges .....	51	ells .....	71
Type K copper, brazed.....	41	couplings .....	49	pressure gauges.....	77
Type K copper, soldered .....	52	ells .....	44-45	pressure/temperature taps .....	77
Type L copper, brazed .....	60	hanger assemblies .....	52	reducers.....	73
Type L copper, soldered.....	68	pressure gauges.....	52	strainers.....	76
Type M copper, brazed .....	77	pressure/temperature taps .....	52	tees.....	72
Type M copper, soldered.....	85	reducers.....	47	thermometers with wells.....	77
Thermostats, heat pump .....	312	riser clamps .....	52	unions.....	74
Threadolets		strainers.....	51	valves .....	75-77
pipe and plumbing specialty .....	134	tees.....	45-46	Type M copper pipe, soldered.....	78-79
Schedule 40 steel, welded .....	218	thermometers with wells.....	52	adapters.....	81
Schedule 80 steel, welded .....	242	unions .....	48	bolt and gasket sets .....	85
Schedule 160 steel, welded .....	262	valves .....	49-51	bushings .....	82
Tier IV.....	199	Type K & L copper pipe,		caps .....	82
Timer, fan .....	327	roll grooved		companion flanges .....	85
Tin solder.....	33, 43, 61, 78	coupling .....	90	couplings .....	82
Toilet		ells .....	89	ells.....	79-80
disconnect .....	433	flange adapter.....	90	pressure gauges.....	85
removal.....	432	reducers.....	90	pressure/temperature taps .....	85
Tools.....	115, 118	tees.....	89	reducers.....	81
Trailers, office, rental.....	420	valves .....	90	strainers.....	84
Transceiver.....	338	Type L copper pipe, brazed .....	53-54	tees.....	80
Trap primers, installation costs .....	435	adapters.....	56	thermometers with wells.....	85
Traps with bushing connections.....	26	bolt and gasket sets .....	60	unions.....	82
Traps, steam .....	125	bushings .....	57	valves .....	83-85
Treatment tank .....	417	cap.....	57		
Triple duty valves .....	120	companion flanges .....	60	<b>U</b>	
Trucks, rental.....	420	couplings .....	57	U-bolts, galvanized.....	124
Tub		ells .....	54	Ultra-violet	
disconnect .....	433	pressure gauges.....	60	disinfection.....	25
removal.....	432	reducers.....	56	water treatment.....	25
Tub and shower combinations .....	28	strainers.....	59	Underground piping, PVC .....	159
Tube-axial fan.....	325	tees.....	55	Unions	
Turning vanes.....	342	thermometers with wells.....	60	copper, press fit.....	87
Tutorial.....	5	unions .....	57	dielectric .....	122
Type I and II PVC		valves .....	58-60	PVC, Schedule 40 .....	95
pipe.....	91-92, 101-102	Type L copper pipe, soldered.....	61-62	PVC, Schedule 80 .....	105
Type K copper pipe, brazed.....	33-34	adapters.....	64	Schedule 40 steel, threaded.....	226
adapters.....	37	bolt and gasket sets .....	68	Schedule 40 steel, welded .....	218
bolt and gasket sets .....	41	bushings .....	65	Schedule 80 steel, threaded.....	250
bushings .....	38	caps .....	65	Schedule 80 steel, welded .....	241
caps .....	38	companion flanges .....	68	Schedule 160 steel, threaded.....	260
companion flanges .....	41	couplings .....	65	Schedule 160 steel, welded .....	260
couplings .....	38	ells .....	62-63	Type K copper, brazed.....	38
ells .....	34	hanger assemblies .....	69	Type K copper, soldered .....	48
hanger assemblies .....	42	pressure gauges.....	68	Type L copper, brazed .....	57
pressure gauges.....	41	pressure/temperature taps .....	68	Type L copper, soldered.....	65
pressure/temperature taps .....	42	reducers.....	64	Type M copper, brazed .....	74
reducers.....	37	riser clamps .....	69	Type M copper, soldered.....	82
riser clamps .....	42	strainers.....	67	Unit heaters .....	210, 303
strainers.....	40	tees.....	63	connections .....	210
tees.....	35-36	thermometers with wells.....	68	demolition .....	428
thermometers with wells.....	41	unions .....	65	gas fired.....	210
unions.....	38	valves .....	66-68	hot water.....	301
valves .....	39-41	Type M copper pipe, brazed .....	70-71	HVAC connections .....	210
Type K copper pipe, soldered .....	43-44	adapters.....	73		
adapters.....	47-48	bolt and gasket sets .....	77		

removal.....428  
 steam.....302  
 Upblast ventilation .....330  
 Updates .....5  
 Urinals .....27  
     disconnect .....433  
     estimating .....435  
 Using this book.....5  
 Utility fan.....324  
 UV disinfection unit.....25

**V**

Vacuum breakers .....120, 204  
     atmospheric .....120  
     hose connection .....120  
 Value engineering .....9  
 Valves  
     air admittance .....328  
     alarm.....171  
     check, flanged .....171  
     check, grooved .....171  
     control.....221  
     double check detector .....171  
     dry.....171  
     fire protection.....171  
     PE-AL pipe .....114, 118  
     PEX-AL pipe.....114, 118  
     pipe and plumbing  
         specialty ..... 126-128, 133  
     PVC, Schedule 40 ..... 96-99  
     PVC, Schedule 80 ..... 106-109  
     PVC, threaded .....97, 107  
     PVC, Tru-union.....97, 107  
     PVC, union type, solvent  
         weld .....98, 107  
     removal.....431  
     Schedule 40 steel,  
         cut-grooved ..... 283-284  
     Schedule 40 steel, roll-grooved...271  
     Schedule 40 steel, threaded.....232  
     Schedule 40, welded .....221  
     Schedule 80 steel, threaded.....253  
     Schedule 80 steel, welded .....245  
     Schedule 160 steel, flanged.....263  
     solenoid .....204  
     solvent weld.....97, 107  
     sprinkler system.....171  
     supervision, flanged.....170  
     supervision, grooved .....171

tags.....421  
 triple duty.....120  
 Type K copper, brazed.....40  
 Type K copper, soldered .....50  
 Type L copper, brazed .....60  
 Type L copper, soldered..... 66-68  
 Type M copper, brazed ..... 75-77  
 Type M copper, soldered..... 83-85  
 Vane-axial fan .....324  
 Vans, storage, rental .....420  
 Variable-air volume  
     cooling units.....337  
     reheat units.....337  
 Vent systems.....435  
     cast iron, hub & spigot.....141  
     cast iron, no-hub.....141  
     copper.....146  
     PVC, DWV.....154  
 Ventilation  
     ductwork ..... 346-347  
     exhausters .....329  
     fans .....326-327  
 Ventilator, heat recovery .....301  
 Vents, air .....121  
 Verantis .....199  
 Victaulic roll-grooved fittings....177-179

**W - X - Y - Z**

Wall exhauster.....326  
 Wall fan .....326  
 Wash fountains, installation costs...435  
 Waste heat controls.....203  
 Waste systems  
     cast iron, hub & spigot.....141  
     cast iron, no-hub.....141  
     copper.....146  
     PVC .....154  
     PVC, DWV.....154  
 Water closets.....27  
     disconnect .....433  
     estimating .....435  
 Water coil piping.....294  
 Water connections, hot and cold.....26  
 Water cooled chiller connection .....211  
 Water hammer arresters .....133  
 Water heaters  
     commercial ..... 19-20  
     connections .....21

estimating .....435  
 residential ..... 19-20  
 solar .....323  
 tankless .....20  
 tankless indirect.....203  
 Water meters  
     by-pass and connection  
         assembly .....119  
     compound type .....119  
     turbine type .....119  
 Water motor gong.....175  
 Water pump.....313  
 Water softener..... 22-24  
     accessories.....23  
 Water softening systems, boiler .....198  
 Water source heat pump..... 307-308  
 Water storage tank.....416  
 Water wells, drilling .....316  
 Watertube boilers .....188  
 Weekly rental, equipment.....420  
 Welding machines, rental.....420  
 Weldolets  
     pipe and plumbing specialty .....134  
     Schedule 40 steel, welded .....218  
     Schedule 80 steel, welded .....241  
     Schedule 160 steel, welded .....261  
 Wells  
     drilling .....316  
     geothermal.....316  
     pipe .....314  
     water pump.....313  
 Well-to-well heat pump..... 307-308  
 Wheel, heat recovery .....301  
 Wireless transceiver .....338  
 Wyes  
     ABS ..... 151-152  
     cast iron, hub & spigot..... 143-144  
     cast iron, no-hub..... 136-138  
     class 150 cast iron.....412  
     class 153 DI, cement lined .....408  
     class 153 DI, double cement  
         lined.....410  
     class 2400 or 3000 asbestos  
         cement.....414  
     copper, DWV, soldered .....147  
     polypropylene pipe ..... 165-166  
     PVC, DWV.....155  
     PVC sewer, bell & spigot..... 160-162

# Practical References for Builders

## National Estimator Cloud



Generate professional construction estimates for all residential and commercial construction from your internet browser. Includes 10 Craftsman construction cost databases, over 40,000 labor and material costs for construction, in an easy-to-use format. Cost estimates are well-organized and thoroughly indexed to speed and simplify writing estimates for nearly any residential or light commercial construction project – new construction, improvement or repair. Convert the bid to an invoice – in either QuickBooks Desktop or QuickBooks Online. Access your estimates from anywhere and on any device with a Web browser. Monthly and one-time billing options available. Visit <https://craftsman-book.com/national-estimator-cloud> for more details.

## Basic Plumbing with Illustrations, Revised eBook

This completely revised edition brings this comprehensive manual fully up-to-date with all the latest plumbing codes. It is the journeyman's and apprentice's guide to installing plumbing, piping, and fixtures in residential and light commercial buildings: how to select the right materials, lay out the job and do professional-quality plumbing work, use essential tools and materials, make repairs, maintain plumbing systems, install fixtures, and add to existing systems. Includes extensive study questions at the end of each chapter, and a section with all the correct answers. **\$22.37**

## Construction Contract Writer



Relying on a "one-size-fits-all" boilerplate construction contract to fit your jobs can be dangerous — almost as dangerous as a handshake agreement. *Construction Contract Writer* lets you draft a contract in minutes that precisely fits your needs and the particular job and meets both state and federal requirements. You just answer a series of questions — like an interview — to construct a legal contract for each project you take on. Anticipate where disputes could arise and settle them in the contract before they happen. Include the warranty protection you intend, the payment schedule, and create subcontracts from the prime contract by just clicking a box. Includes a feedback button to an attorney on the Craftsman staff to help should you get stumped — *No extra charge.*

**\$149.95.** Download the *Construction Contract Writer* at <http://www.constructioncontractwriter.com>

## Plumber's Handbook Revised

This edition shows what will and won't pass inspection in drainage, vent, and waste piping, septic tanks, water supply, graywater recycling systems, pools and spas, fire protection, and gas piping systems. All tables, standards, and specifications are completely up-to-date with recent plumbing code changes. Covers common layouts for residential work, how to size piping, select and hang fixtures, practical recommendations, and trade tips. It's the approved reference for the plumbing contractor's exam in many states. Includes an extensive set of multiple-choice questions after each chapter, with answers and explanations in the back of the book, along with a complete sample plumber's exam. **384 pages, 8 1/2 x 11, \$44.50**

**eBook (PDF) also available; \$22.25** at [www.craftsman-book.com](http://www.craftsman-book.com)

## Building Code Compliance for Contractors & Inspectors

Have you ever failed a construction inspection? Have you ever dealt with an inspector who has his own interpretation of the Code and forces you to comply with it? This new book explains what it takes to pass inspections under the 2009 *International Residential Code*. It includes a Code checklist — with explanations and the Code section number — for every trade, covering some of the most common reasons why inspectors reject residential work. The author uses his 30 years' experience as a building code official to provide you with little-known information on what code officials look for during inspections. **232 pages, 8 1/2 x 11, \$32.50**

**eBook (PDF) also available; \$16.25** at [www.craftsman-book.com](http://www.craftsman-book.com)

## Uniform Plumbing Code Quick-Card 2021

This 6-page, laminated, fold-out guide provides the basic numbers, flow rates and formulas the plumber needs based on the *2021 Uniform Plumbing Code (UPC)*. Like a Cliffs Notes to the Plumbing Code.

**6 pages, 8 1/2 x 11, \$9.95**

## Plumbing & HVAC Manhour Estimates

Hundreds of tested and proven manhours for installing just about any plumbing and HVAC component you're likely to use in residential, commercial, and industrial work. You'll find manhours for installing piping systems, specialties, fixtures and accessories, ducting systems, and HVAC equipment. If you estimate the price of plumbing, you shouldn't be without the reliable, proven manhours in this unique book.

**224 pages, 5 1/2 x 8 1/2, \$28.25**

## Paper Contracting: The How-To of Construction Management Contracting

Risk, and the headaches that go with it, have always been a major part of any construction project — risk of loss, negative cash flow, construction claims, regulations, excessive changes, disputes, slow pay — sometimes you'll make money, and often you won't. But many contractors today are avoiding almost all of that risk by working under a construction management contract, where they are simply a paid consultant to the owner, running the job, but leaving him the risk. This manual is the how-to of construction management contracting. You'll learn how the process works, how to get started as a CM contractor, what the job entails, how to deal with the issues that come up, when to step back, and how to get the job completed on time and on budget. Includes a link to free downloads of CM contracts legal in each state.

**272 pages, 8 1/2 x 11, \$55.50**

**eBook (PDF) also available; \$27.75** at [www.craftsman-book.com](http://www.craftsman-book.com)

## Planning Drain, Waste & Vent Systems

How to design plumbing systems in residential, commercial, and industrial buildings. Covers designing systems that meet code requirements for homes, commercial buildings, private sewage disposal systems, and even mobile home parks. Includes relevant code sections and many illustrations to guide you through what the code requires in designing drainage, waste, and vent systems. **192 pages, 8 1/2 x 11, \$39.95**

## Uniform Plumbing Code Tables/Equations Quick Card 2021

This 6-page, laminated guide provides the basic numbers, flow rates and formulas the plumber needs based from *2021 Uniform Plumbing Code (UPC)*. **6 pages, 8 1/2 x 11, \$9.95**

## International Plumbing Code Quick-Card 2021 IPC

In this unique quick-reference guide, a single, 6-page laminated card, you get most of the new International Plumbing Code essentials that you need to know, based on the current 2021 *IPC*. **6 pages, 8 x 5 1/2, \$9.95**

## Construction Forms for Contractors

This practical guide contains 78 practical forms, letters and checklists, guaranteed to help you streamline your office, organize your jobsites, gather and organize records and documents, keep a handle on your subs, reduce estimating errors, administer change orders and lien issues, monitor crew productivity, track your equipment use, and more. Includes accounting forms, change order forms, forms for customers, estimating forms, field work forms, HR forms, lien forms, office forms, bids and proposals, subcontracts, and more. All are also on the CD-ROM included, in Excel spreadsheets, as formatted Rich Text that you can fill out on your computer, and as PDFs. **360 pages, 8 1/2 x 11, \$48.50**

**eBook (PDF) also available; \$24.25** at [www.craftsman-book.com](http://www.craftsman-book.com)



### National Construction Estimator

Current building costs for residential, commercial, and industrial construction. Estimated prices for every common building material. Provides man-hours, recommended crew, and gives the labor cost for installation. **672 pages, 8 1/2 x 11, \$97.50. Revised annually**  
**eBook (PDF) also available; \$48.75** at [www.craftsman-book.com](http://www.craftsman-book.com)

### National Appraisal Estimator



An Online Appraisal Estimating Service. Produce credible single-family residence appraisals – in as little as five minutes. A smart resource for appraisers using the cost approach. Reports consider all significant cost variables and both physical and functional depreciation. For more information, visit [www.craftsman-book.com/national-appraisal-estimator-online-software](http://www.craftsman-book.com/national-appraisal-estimator-online-software)

### Home Building Mistakes & Fixes

This is an encyclopedia of practical fixes for real-world home building and repair problems. There's never an end to "surprises" when you're in the business of building and fixing homes, yet there's little published on how to deal with construction that went wrong - where out-of-square or non-standard or jerry-rigged turns what should be a simple job into a nightmare. This manual describes jaw-dropping building mistakes that actually occurred, from disastrous misunderstandings over property lines, through basement floors leveled with an out-of-level instrument, to a house collapse when a siding crew removed the old siding. You'll learn the pitfalls the painless way, and real-world working solutions for the problems every contractor finds in a home building or repair jobsite. Includes dozens of those "surprises" and the author's step-by-step, clearly illustrated tips, tricks and workarounds for dealing with them.  
**384 pages, 8 1/2 x 11, \$52.50**  
**eBook (PDF) also available; \$26.25** at [www.craftsman-book.com](http://www.craftsman-book.com)

### Insurance Restoration Contracting: Startup to Success

Insurance restoration — the repair of buildings damaged by water, fire, smoke, storms, vandalism and other disasters — is an exciting field of construction that provides lucrative work that's immune to economic downturns. And, with insurance companies funding the repairs, your payment is virtually guaranteed. But this type of work requires special knowledge and equipment, and that's what you'll learn about in this book. It covers fire repairs and smoke damage, water losses and specialized drying methods, mold remediation, content restoration, even damage to mobile and manufactured homes. You'll also find information on equipment needs, training classes, estimating books and software, and how restoration leads to lucrative remodeling jobs. It covers all you need to know to start and succeed as the restoration contractor that both homeowners and insurance companies call on first for the best jobs.  
**640 pages, 8 1/2 x 11, \$69.00**  
**eBook (PDF) also available; \$34.50** at [www.craftsman-book.com](http://www.craftsman-book.com)



### Craftsman eLibrary

Craftsman's eLibrary license gives you immediate access to 60+ PDF eBooks in our bookstore for 12 full months!  
**You pay only one low price. \$129.99.**  
**Visit [www.craftsman-book.com](http://www.craftsman-book.com) for more details.**



### Plumber's Exam Preparation Guide eBook

Hundreds of questions and answers to help you pass the apprentice, journeyman, or master plumber's exam. Questions are in the style of the actual exam. Gives answers for both the Standard and Uniform plumbing codes. Includes tips on studying for the exam and the best way to prepare yourself for examination day. **\$19.00**



**Craftsman Book Company**  
 6058 Corte del Cedro  
 Carlsbad, CA 92011

Call me.  
**1-800-829-8123**  
 Fax (760) 438-0398

Name \_\_\_\_\_  
 e-mail address (for order tracking and special offers) \_\_\_\_\_  
 Company \_\_\_\_\_  
 Address \_\_\_\_\_  
 City/State/Zip \_\_\_\_\_  This is a residence  
 Total enclosed \_\_\_\_\_ (In California add 7.5% tax)  
*Free Media Mail shipping, within the US,  
 when your check covers your order in full.*

### In A Hurry?

We accept phone orders charged to your

Visa,  MasterCard,  Discover or  American Express

Card# \_\_\_\_\_

Exp. date \_\_\_\_\_ CVV# \_\_\_\_\_ Initials \_\_\_\_\_

**Tax Deductible:** Treasury regulations make these references tax deductible when used in your work. Save the canceled check or charge card statement as your receipt.

**Order online: [www.craftsman-book.com](http://www.craftsman-book.com)**

**Writing contracts that comply with law in your state isn't easy. A contract that doesn't comply could leave you with no way to collect. Construction Contract Writer has you covered. Download a trial today:**  
**[www.constructioncontractwriter.com](http://www.constructioncontractwriter.com)**

#### 10-Day Money Back Guarantee

#### Prices subject to change without notice

- |   |  |
|---|--|
| <input type="radio"/> 32.50 Building Code Compliance for Contractors & Inspectors | <input type="radio"/> 55.50 Paper Contracting: The How-To of Construction Management Contracting |
| <input type="radio"/> 48.50 Construction Forms for Contractors                    | <input type="radio"/> 39.95 Planning Drain, Waste & Vent Systems                                 |
| <input type="radio"/> 52.50 Home Building Mistakes & Fixes                        | <input type="radio"/> 44.50 Plumber's Handbook Revised   |
| <input type="radio"/> 69.00 Insurance Restoration Contracting: Startup to Success | <input type="radio"/> 28.25 Plumbing & HVAC Manhour Estimates                                    |
| <input type="radio"/> 9.95 Int'l Plumbing Code Quick-Card Based on 2021 IPC       | <input type="radio"/> 9.95 Uniform Plumbing Code Quick-Card                                      |
| <input type="radio"/> 97.50 National Construction Estimator                       | <input type="radio"/> 9.95 Uniform Plumbing Code Tables/Equations Quick-Card 2021                |
|   | <input type="radio"/> 98.25 National Plumbing & HVAC Estimator                                   |